
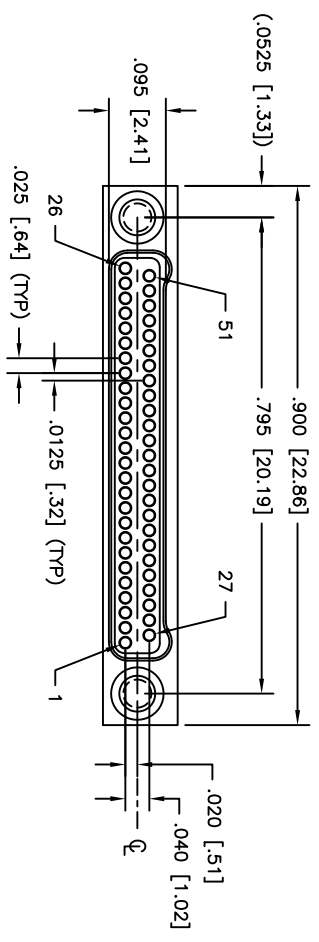


10 9 8 7 6 5 4 3 2

PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV				
ISSUE				
-	07/26/19	UM17223	T-POWBART	PER

WIRING COLOR CODE

- 1, 11, 21, 31, 41, 51 — BLACK
- 2, 12, 22, 32, 42 — BROWN
- 3, 13, 23, 33, 43 — RED
- 4, 14, 24, 34, 44 — ORANGE
- 5, 15, 25, 35, 45 — YELLOW
- 6, 16, 26, 36, 46 — GREEN
- 7, 17, 27, 37, 47 — BLUE
- 8, 18, 28, 38, 48 — VIOLET
- 9, 19, 29, 39, 49 — GRAY
- 10, 20, 30, 40, 50 — WHITE

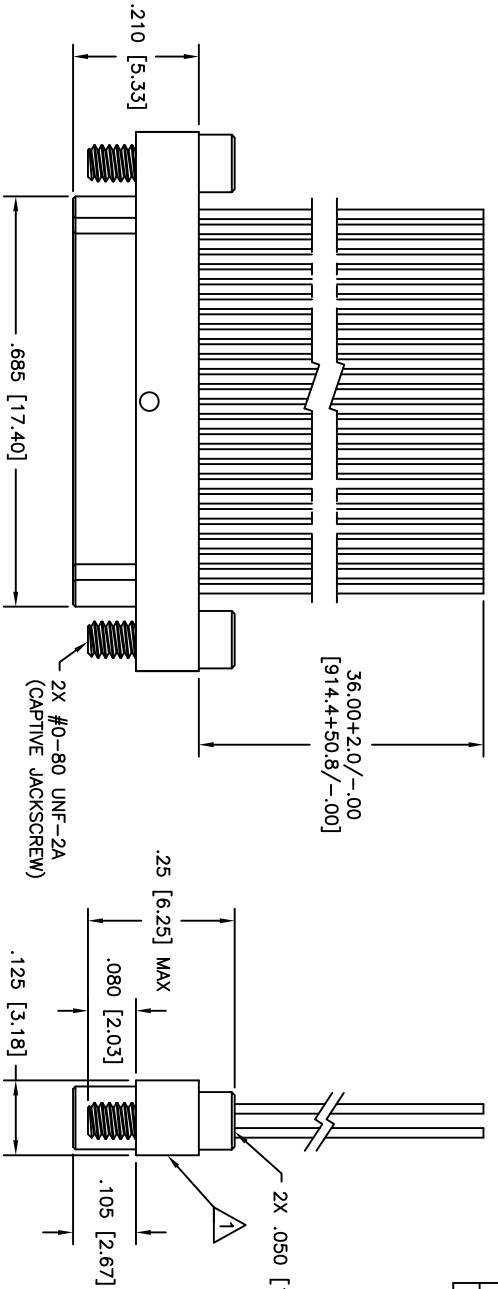

3. PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 DMV: 250 VAC
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.071 VOLT MAXIMUM DROP @ 1.0 AMPS (0.71 OHMS)
 W/6.00" OF WIRE LISTED BELOW, PER MIL-DTL-32139

2. MATERIALS: SHELL: 300 SERIES STAINLESS STEEL, PASSIVATED PER AMS2700
 INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F
 CONTACT: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 LEADS: 30 AWG, NEMA HP3, TYPE ET, COLOR CODED PER MIL-DTL-681, SYSTEM 1,
 EXCEPT USING 10 SOLID REPEATING COLORS
 HARDWARE: 303 STAINLESS PER ASTM 582

1. MARKINGS: UMI, DATE CODE AND WITH "J" M32139/03-606SS"
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	5:1	B		
CRITICAL =	3 PLACE ±.005	DRAWN BY & DATE			
C =	2 PLACE ±.010	PER 07-15-19			
	ANGULAR ±2°	CHECKED BY & DATE			
		SEE ECN			
		APPROVED BY & DATE			
		SEE ECN			
SPC	UTII-Mate CASE CODE	CAD FILENAME	PART NO.	DRAWING NO.	SHEET NO.
5	58967	SD-321376632.DWG	321376632	SD-321376632	1 OF 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
					PART REV