


WIRING COLOR CODE

- 1 — BLACK
- 2 — BROWN
- 3 — RED
- 4 — ORANGE
- 5 — YELLOW
- 6 — GREEN
- 7 — BLUE

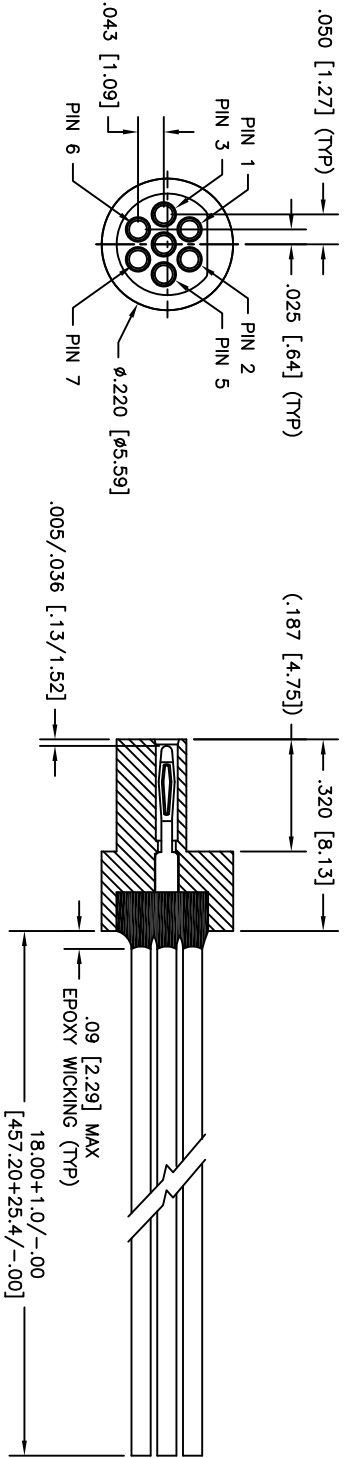

- 3. PERFORMANCE: CONTACT RATING: 3 AMPERE MAXIMUM (AT AMBIENT TEMPERATURE)
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 500 VDC
- 2. MATERIALS: INSULATOR: PPS PER MIL-M-24519 GST-40F, OR LCP (LIQUID CRYSTAL POLYMER)
LCP-30F COLOR: BLACK
CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
LEADS: 26 AWG, MIL-W-16878/4, COLOR CODED
EPOXY: 200° CELSIUS
- 1. MARKINGS: UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	S:1	B		
CRITICAL =	3 PLACE ±.005	DRAWN BY & DATE	PER 09-06-19		
C =	2 PLACE ±.010	CHECKED BY & DATE	SEE ECN		
S =	ANGULAR ±2°	APPROVED BY & DATE	SEE ECN		
SPC		CAD FILENAME	SD-411051800.DWG	PART NO.	411051800
UT+MATE				DRAWING NO.	SD-411051800
58967				SHEET NO.	1 OF 1
				PART REV	-

PART DWG	DATE	ECN NO.	APPVD BY	REL BY
REV ISSUE			TPOWBART	PER
-	09/12/19	UMI274		

NOTES: UNLESS OTHERWISE SPECIFIED