
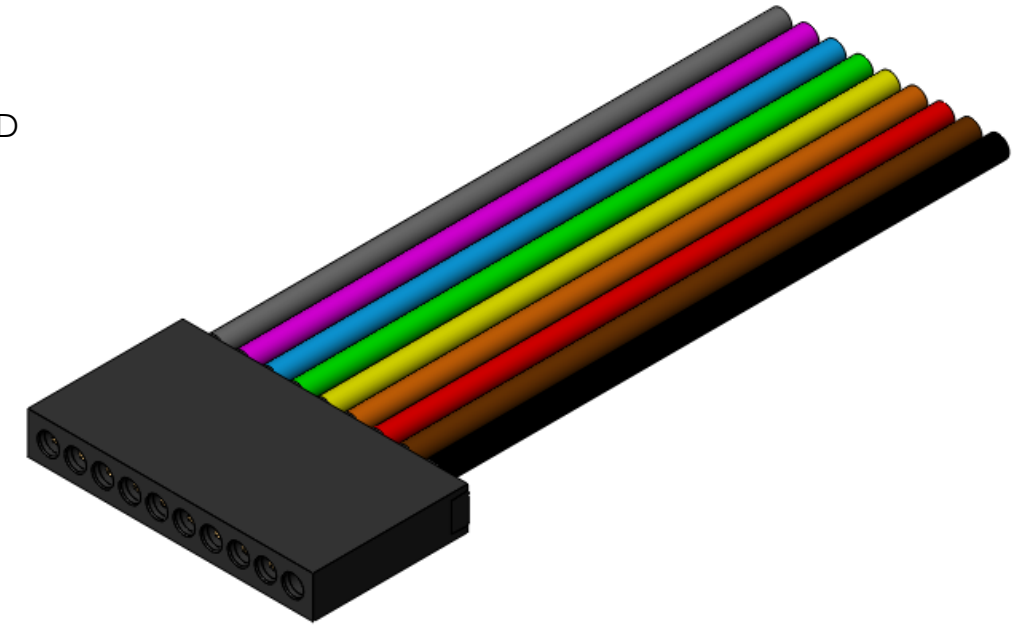


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	12/19/14	UMI5496	DW	DW

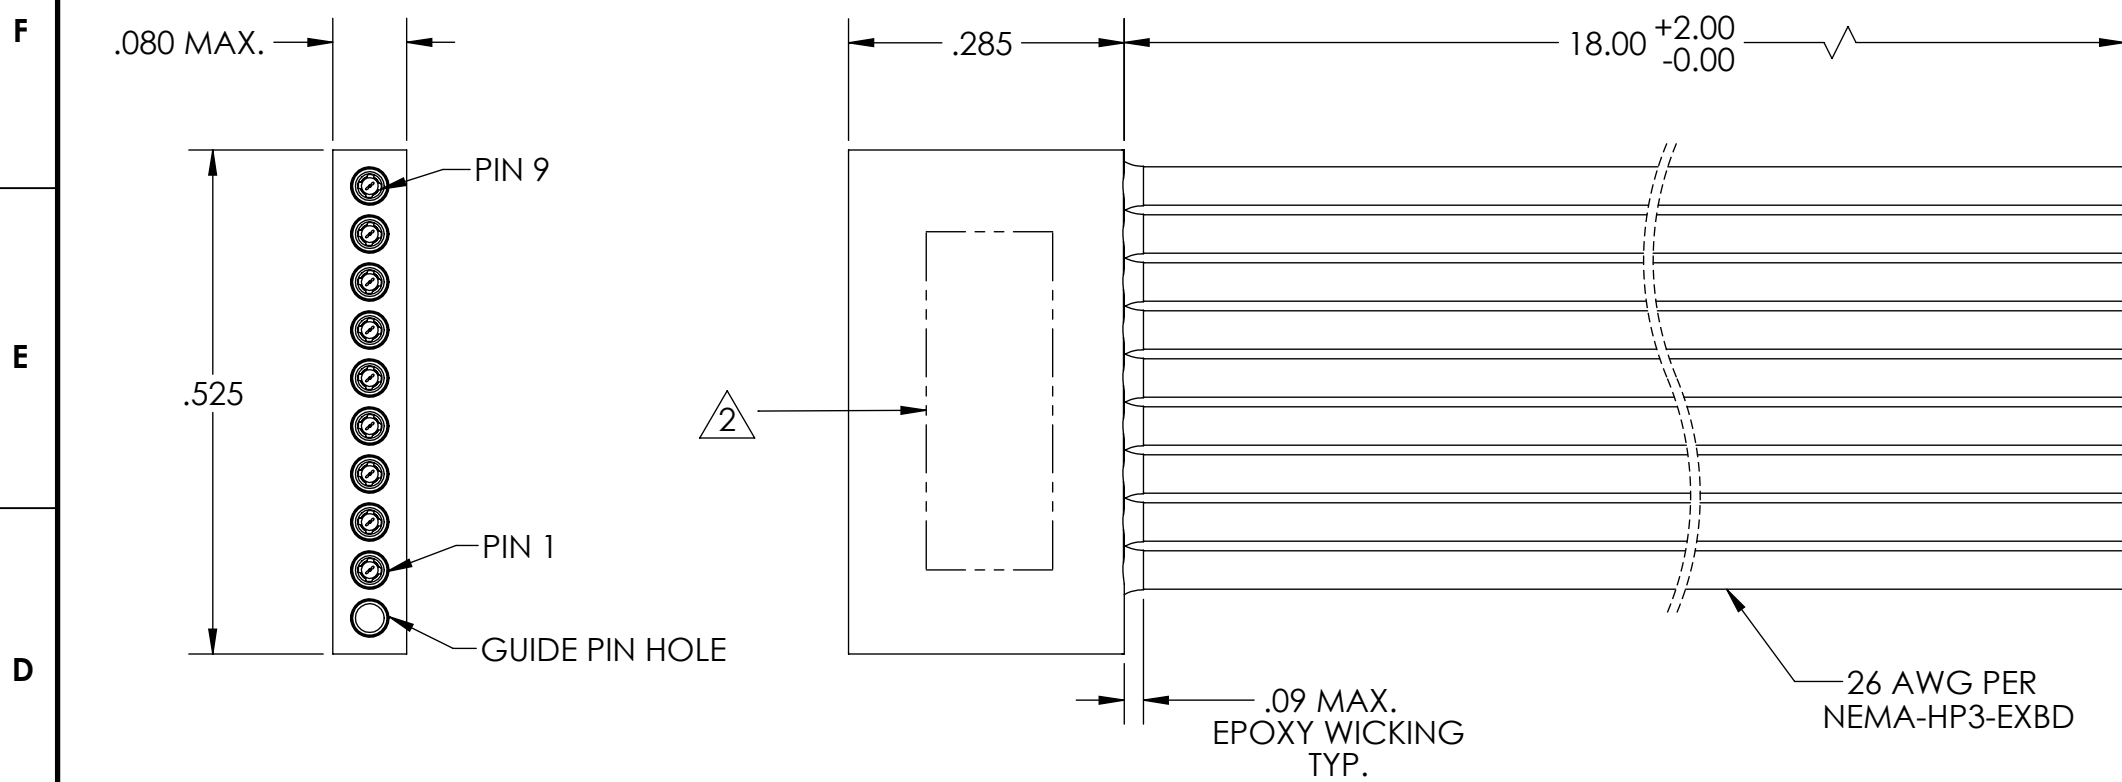

GUIDE PIN HOLE	
1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY

4. PERFORMANCE SPECIFICATIONS (AT AMBIENT TEMPERATURE):
 CURRENT RATING: 3 AMPS MAX.
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 DWV: 600 VAC
 TEMPERATURE RATING: 200° C

3 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 PIN CONTACT: C17410 BERYLLIUM COPPER PER ASTM B768,
 GOLD PLATED PER ASTM B488
 WIRE: 26 AWG PER NEMA-HP3-EXBD, COLOR CODE: PER MIL-STD-681

2 MARKING: "UMI", DATE CODE ON PART. BAG AND TAG WITH UMI PART NUMBER.

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.
NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 11/19/14	TITLE: MICRO STRIP CONNECTOR ASSEMBLY, SR09P1-26E5-18.0-HT, HIGH TEMP			
		CHECKED BY & DATE DW 11/19/14	MATERIAL: 3		ENG PROJECT #: E218	
		APPROVED BY & DATE DW 11/19/14	PART NO. 437091904		DRAWING NO. SD-437091904	
	ULTI-MATE CAGE CODE 58967	CAD FILE NAME SD-437091904.SLDDRW	SHEET NO. 1 of 1		PART REV. -	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

