


REVISIONS


PART REV.	DWG. ISSUE	DATE	ECN NO.	APPVD. BY	REL. BY
-	-	01/20/2014	UMI5207	DW	DW

F
E
D
C
B
A

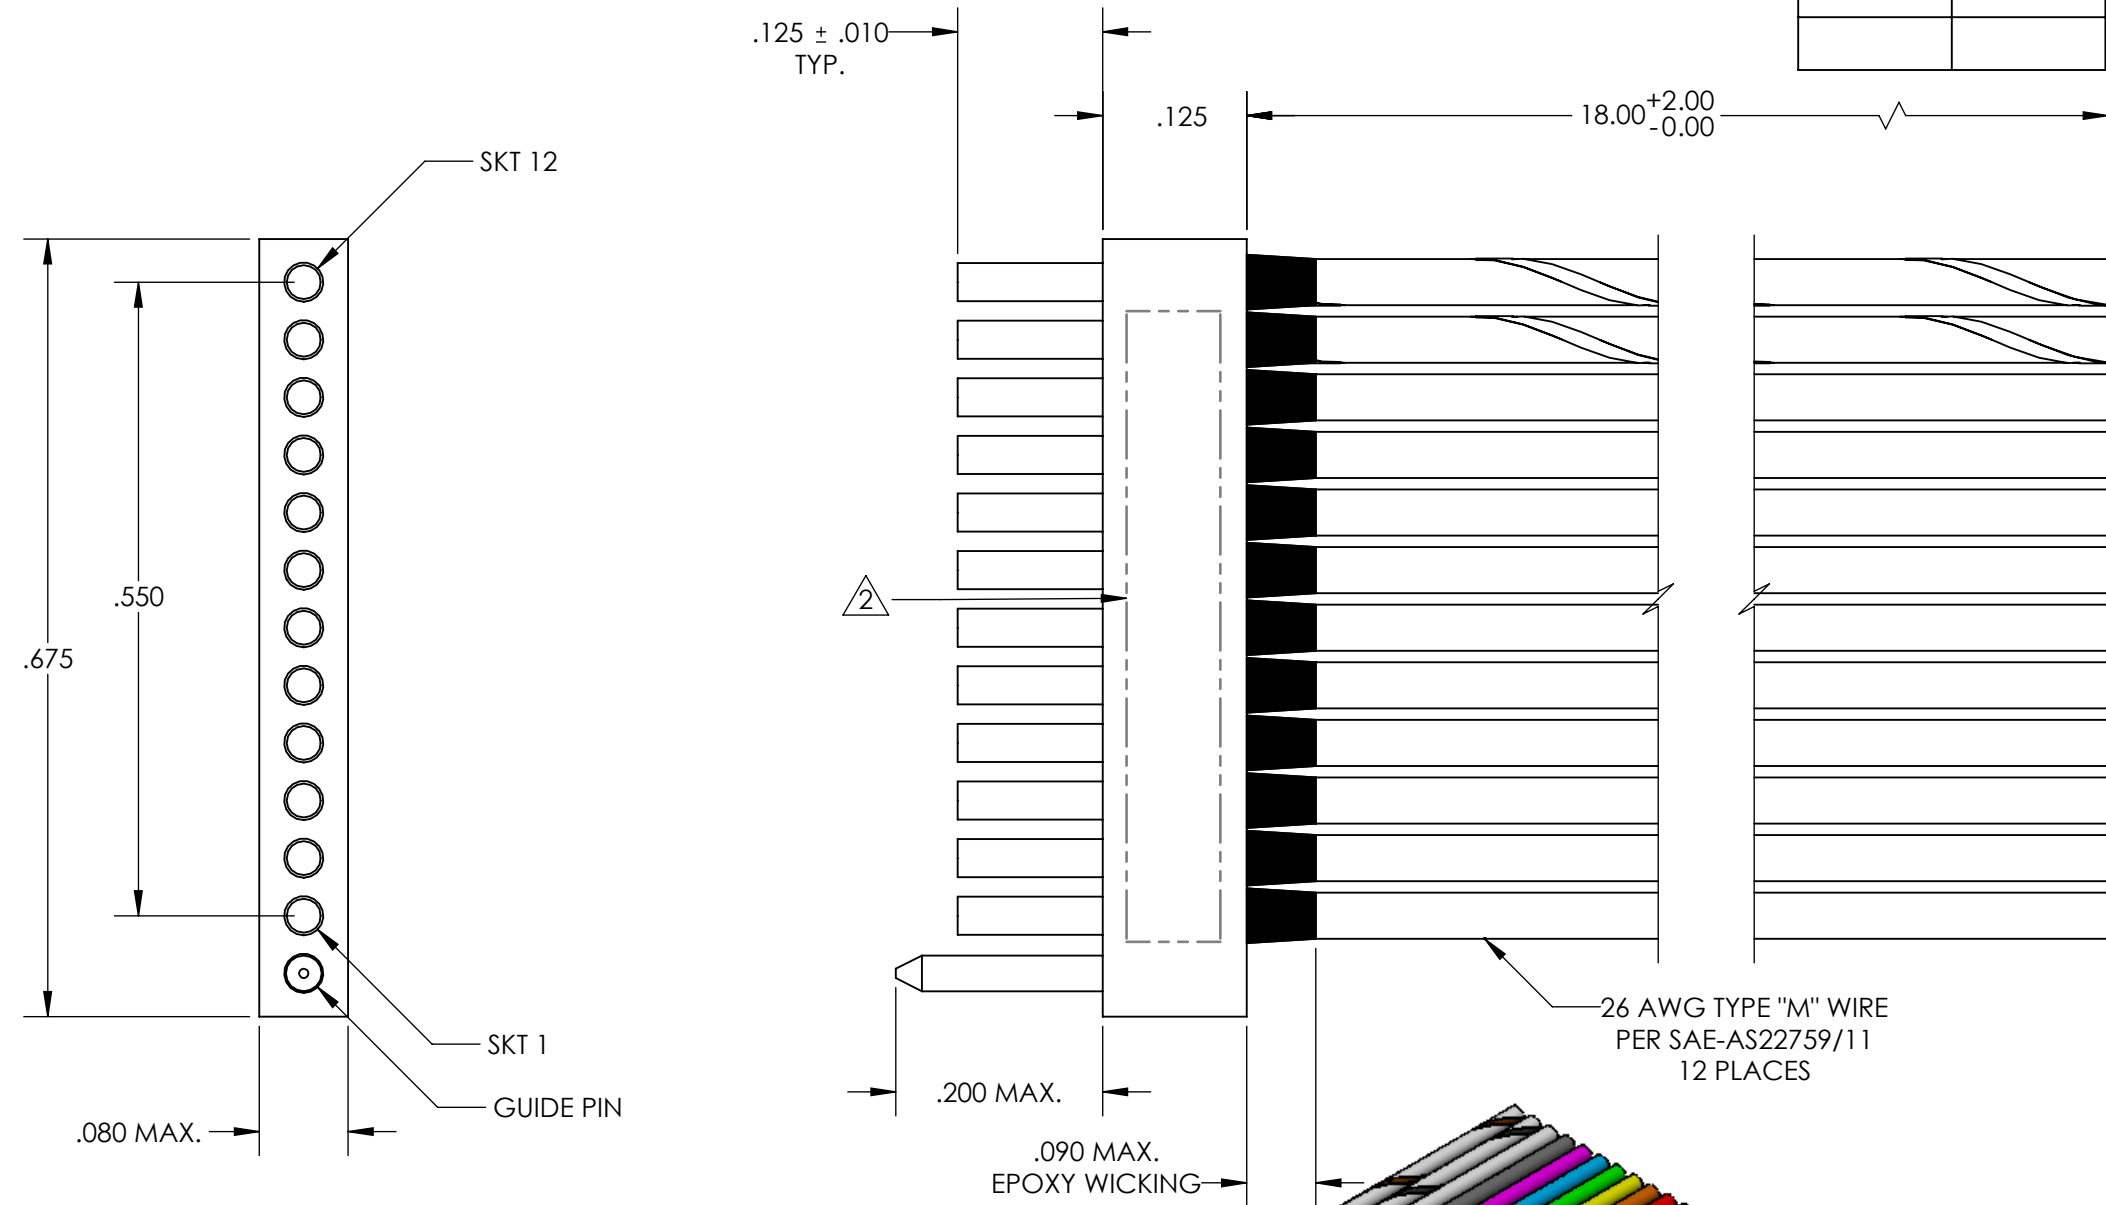

COLOR CODE

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	W/BLK
12	W/BRN

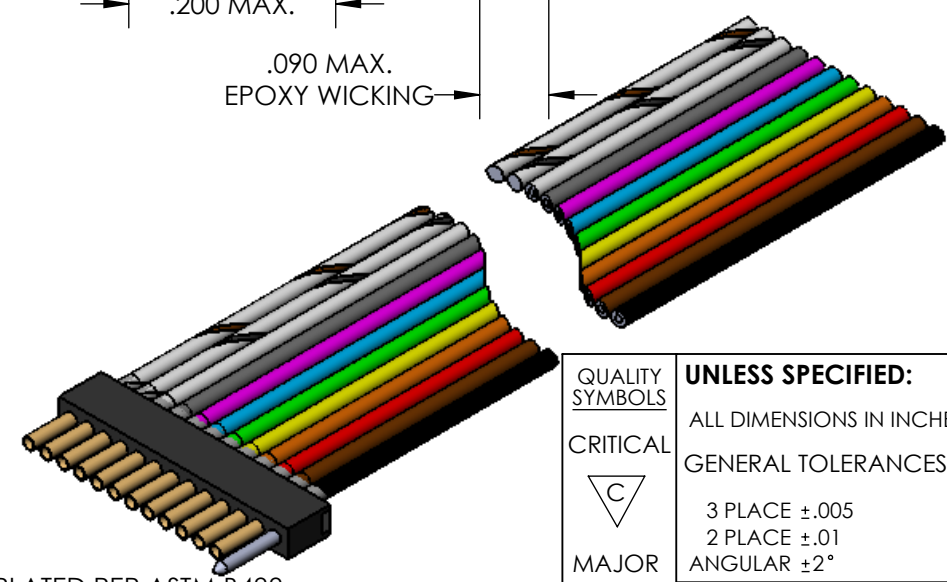

4. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3A MAX.
 INSULATION RESISTANCE: 5000 MΩ MIN.
 DWV: 600 VAC
 TEMPERATURE RATING: 200°C

3 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLK
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488
 GUIDE PIN: PASSIVATED 300 SERIES STAINLESS STEEL

2 MARKINGS: UMI & DATE CODE, BAG & TAG W/UMI, UMI PART NO.
 1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 WHERE APPLICABLE

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOL = MINOR DIMENSION	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2° ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	SCALE 6:1	DWG SIZE B	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY			
		DRAWN BY & DATE JB 01/03/2014			TITLE MICRO-D STRIP CONNECTOR, WIRED SIZE 12 W/GUIDE PIN, RECEPTACLE SR12S1-26M5-18.0-HT			
		CHECKED BY & DATE DW 1-6-14		APPROVED BY & DATE DW 1-6-14		MATERIAL 3	ENG PROJECT # E151	
		CAD FILENAME SD-437122900.slddrw		PART NO. 437122900	DRAWING NO. SD-437122900	SHEET NO. 1 OF 1		PART REV. -
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.								