
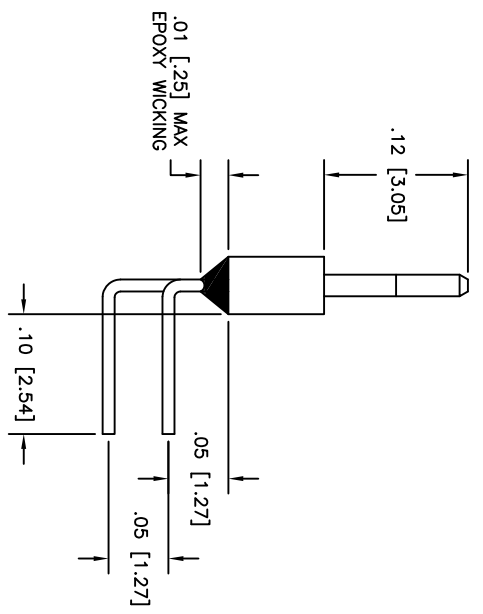
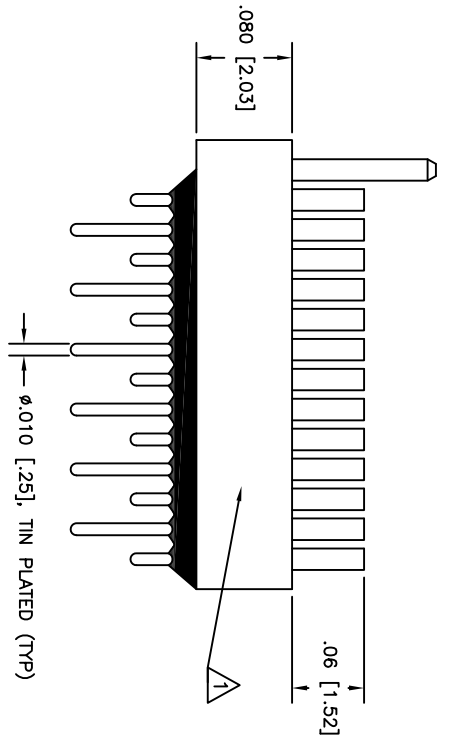


PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV	ISSUE	UMI5675	T.POMBART	PER
A	A	08-21-15	UMI5721	T.POMBART
				PER

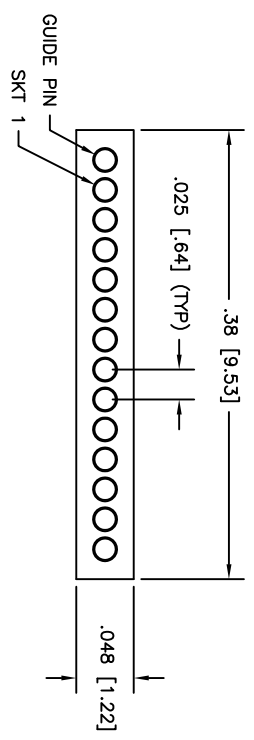

3. PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS

CONTACT RATING: 1 AMPERE MAXIMUM
 DWV: 250 VAC
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.021 VOLT MAXIMUM DROP @ 1.0 AMPS (.021 OHMS)

2. MATERIALS: INSULATOR: PPS (POLYPHENYLENE SULFIDE) GST-40F
 CONTACTS: BRASS ALLOY 735, GOLD PLATED PER ASTM B488
 GUIDE PIN: 300 SERIES STAINLESS STEEL, PASSIVATED
 LEADS: 30 AWG, TIN PLATED COPPER ALLOY
 EPOXY: 200° CELSIUS

1. MARKINGS: UMI, DATE CODE ON INSULATOR, UMI P/N ON BAG ON TAG, AS SPACE PERMITS
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	10:1	B		
CRITICAL =	3 PLACE ±.005	DRAWN BY & DATE			
C =	2 PLACE ±.010	PER 06-05-15			
S =	ANGULAR ±2°	CHECKED BY & DATE			
SPC		SEE ECN			
UT+M		SEE ECN			
UT+M		CAD FILENAME			
58967		SD-437136081.DWG			
		PART NO.			
		437136081			
		DRAWING NO.			
		SD-437136081			
		SHEET NO.			
		1 OF 1			
		REV			