
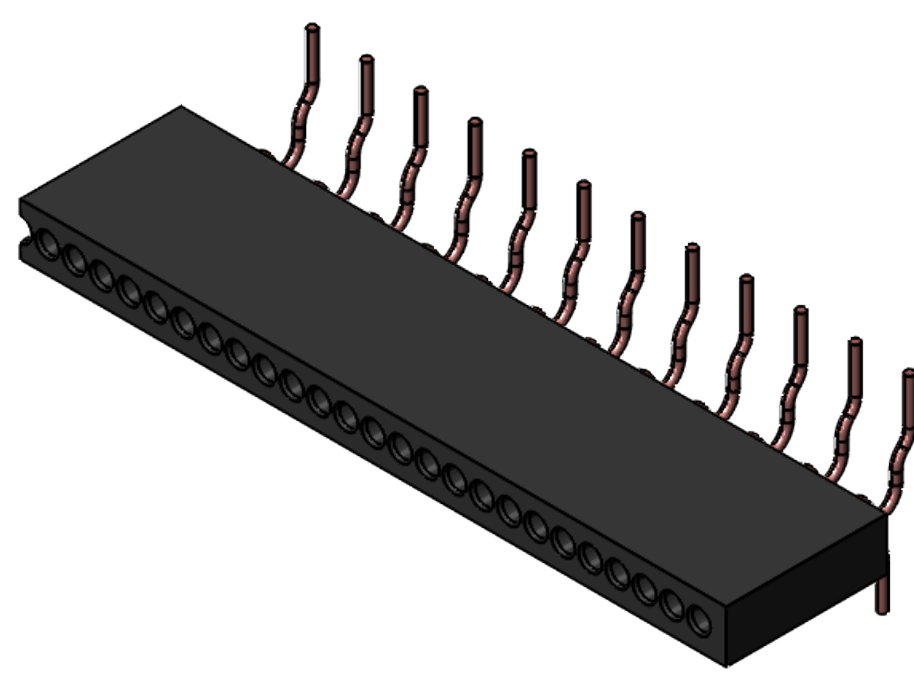
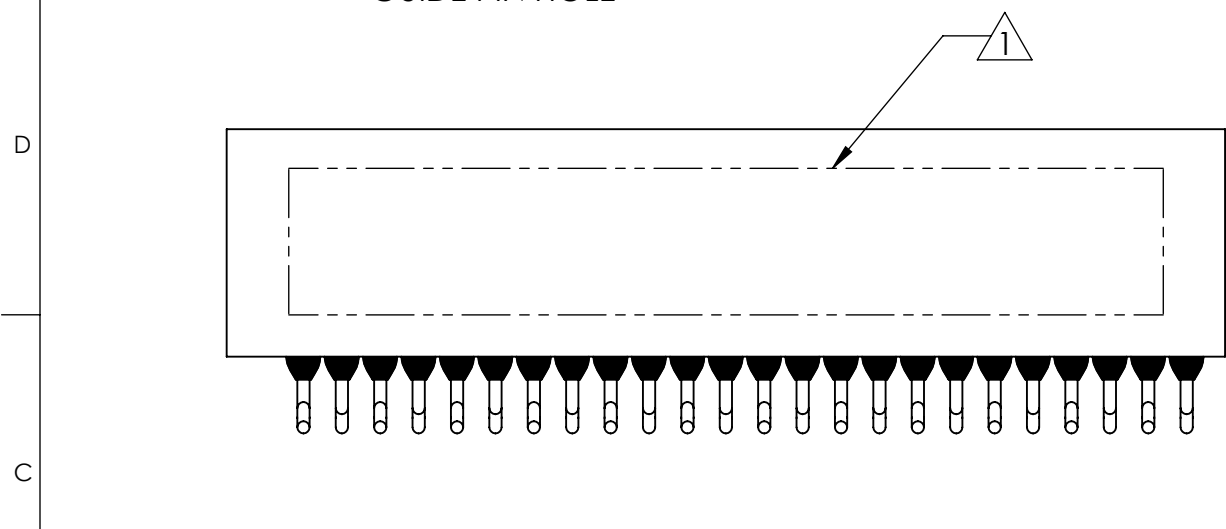
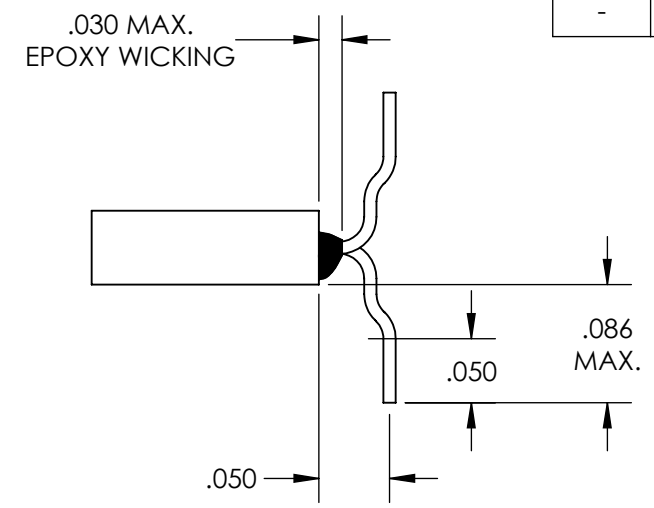


REVISIONS					
PART REV.	DWG. ISSUE	DATE	ECN NO.	APPVD. BY	REL. BY
-	-	5/29/2020	UMI7488	JA	DW

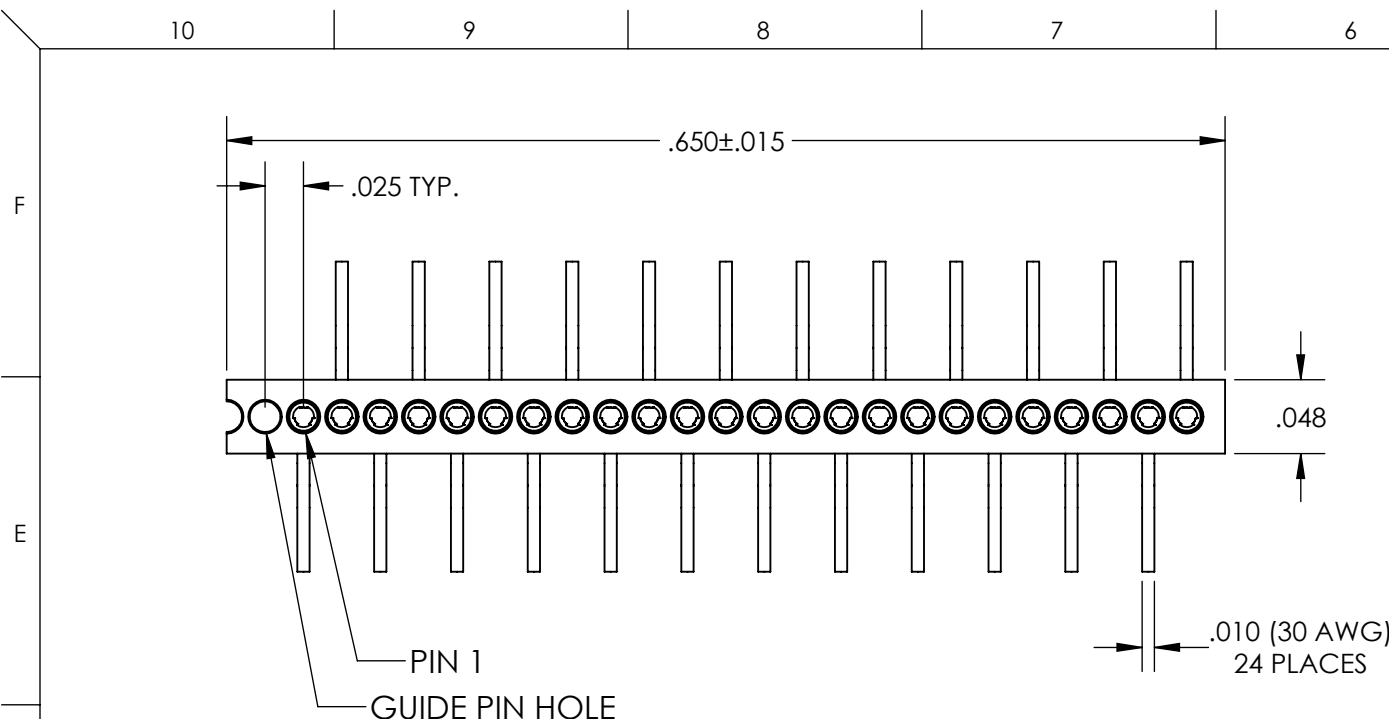

3. PERFORMANCE SPECIFICATIONS:
 CONTACT RATING: 1 AMP MAX.
 DWV: 250 VAC
 INSULATION RESISTANCE: 5000 MΩ MIN. @ 100 VDC
 TEMPERATURE RATING: 200°C

△ 2 MATERIALS:
 INSULATOR: PPS (POLYPHENYLENE SULFIDE) PER MIL-M-24519 GST-40F
 CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 LEADS: TIN PLATED COPPER ALLOY PER ASTM B49

△ 1 MARKINGS: BAG AND TAG WITH UMI, UMI PART NO., DATE CODE, AND WORK ORDER NO.

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS CRITICAL △ C SPL/MI NOR (S) SPL/MAJOR ▼ KEY (K)	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 8:1	DWG SIZE B	THIRD ANGLE PROJECTION 	REVISE ON CAD ONLY	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT Umi-Mate CAGE CODE 58967	DRAWN BY & DATE JA 5/29/2020	TITLE NANO STRIP CONNECTOR, PLUG, NSR24P1-L06-HT		MATERIAL △ 2	ENG PROJECT #
		CHECKED BY & DATE SEE ECN	APPROVED BY & DATE SEE ECN		PART NO. 437245091	DRAWING NO. SD-437245091
		CAD FILENAME SD-437245091.slddrw	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SHEET NO. 1 OF 1	PART REV. -

