


PART DWG	DATE	ECN NO.	APP'D BY	REL BY
REV				
ISSUE	08/08/18	UMI6838	T-POWBAKT	PER

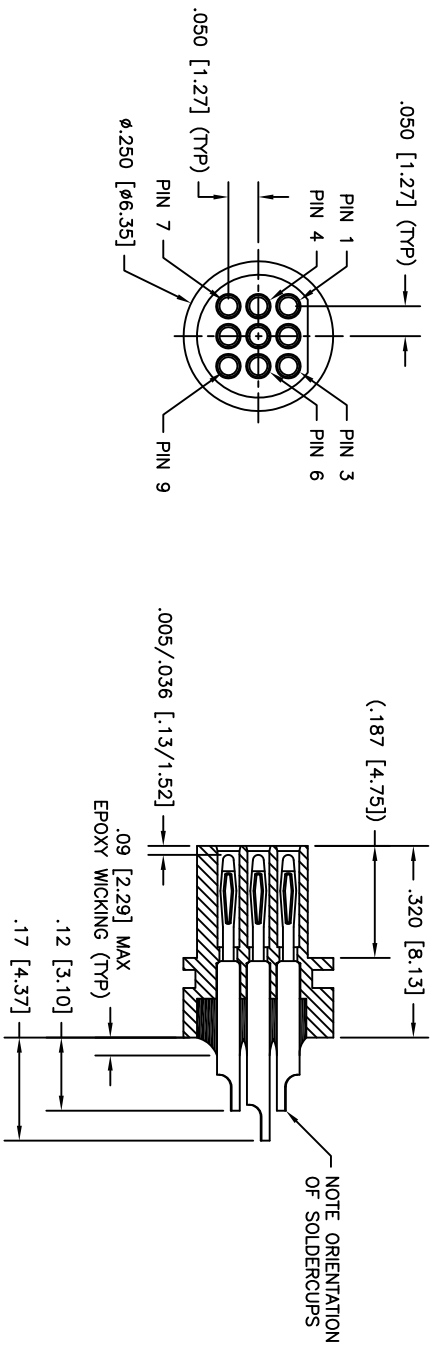

3. PERFORMANCE: MEETS OR EXCEEDS MB3513 PERFORMANCE SPECIFICATIONS  
 CONTACT RATING: 3 AMPERE MAXIMUM  
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 500 VDC  
 CONTACT RESISTANCE: 8 MILLIOHMS MAX @ 2.5 AMPS
2. MATERIALS: INSULATOR: PPS PER MIL-M-24519 GST-40F, OR LCP (LIQUID CRYSTAL POLYMER)  
 GLCP-30F COLOR: BLACK  
 CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
1. MARKINGS: UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
- NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	DRAWN BY & DATE	B		
CRITICAL =	3 PLACE $\pm$ .005	PER	08-08-18	TITLE	MICRO CIRCULAR CONNECTOR, MALE
SPC =	2 PLACE $\pm$ .010	CHECKED BY & DATE		(PLUG), SIZE 9, PROP-09N	
S =	ANGULAR $\pm$ 2°	SEE ECN		MATERIAL	
		APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME		PART NO.	811071000
		Uti+MATE CAGE CODE		DRAWING NO.	SD-811071000
		58967		SHEET NO.	1 OF 1
				PART REV	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO UTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.