


PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV ISSUE	07-13-17	UM6434	TPOUBART	PER

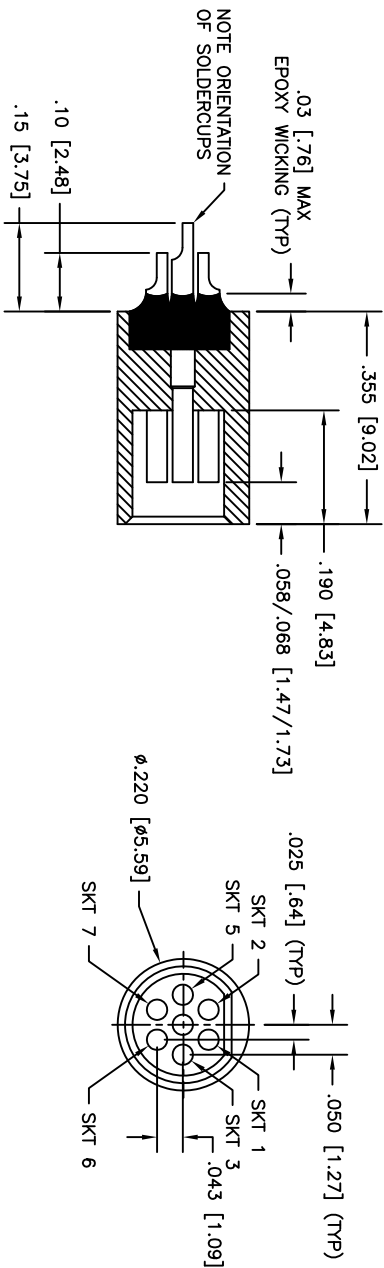

3. PERFORMANCE: MEETS OR EXCEEDS M83513 PERFORMANCE SPECIFICATIONS  
 CONTACT RATING: 3 AMPERE MAXIMUM  
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 500 VDC  
 CONTACT RESISTANCE: 8 MILLIOHMS MAX @ 2.5 AMPS
2. MATERIALS: INSULATOR: PPS PER MIL-M-24519 GST-40F, OR LCP (LIQUID CRYSTAL POLYMER)  
 GLCP-30F COLOR: BLACK  
 CONTACTS: BRASS ALLOT 314, GOLD PLATED PER ASTM B488
1. MARKINGS: UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
- NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	10:1	B		
CRITICAL =	3 PLACE ±.005	DRAWN BY & DATE			
SPC =	2 PLACE ±.010	PER 05-01-13			
S =	ANGULAR ±2°	CHECKED BY & DATE			
		SEE ECN			
		APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME			
		SD-812051000.DWG			
		PART NO.			
		812051000			
		DRAWING NO.			
		SD-812051000			
		SHEET NO.			
		1 OF 1			
		PART REV			

A

B

C

D

E

F