
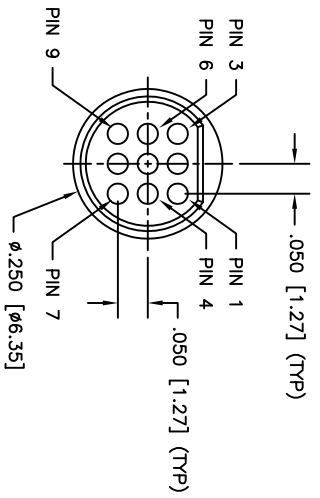


PART DWG	REV	DATE	ECN NO.	APPD BY	REL BY
-	-	08/08/18	UMI6938	T-POWBAR	PER

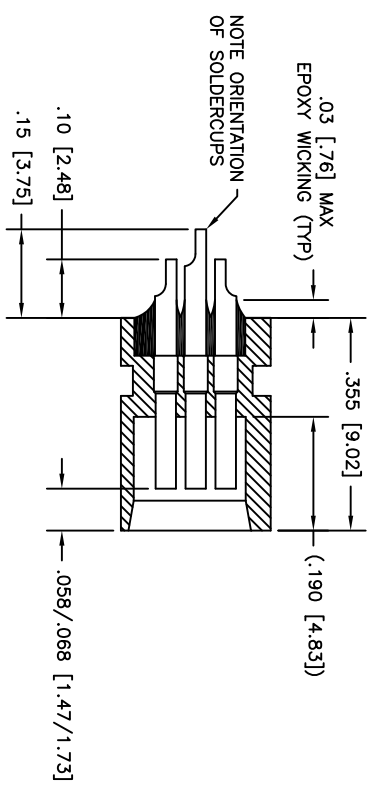

3. PERFORMANCE: MEETS OR EXCEEDS M83513 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 3 AMPERE MAXIMUM
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 500 VDC
 CONTACT RESISTANCE: 8 MILLIOHMS MAX @ 2.5 AMPS

2. MATERIALS: INSULATOR: PPS PER MIL-M-24519 GST-40F, OR LCP (LIQUID CRYSTAL POLYMER)
 GLCP-30F COLOR: BLACK
 CONTACTS: BRASS ALLOY 314, GOLD PLATED PER ASTM B488

1. MARKINGS: UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	10:1	B		
CRITICAL =	3 PLACE ±.005	DRAWN BY & DATE			
C =	2 PLACE ±.010	PER 08-08-18			
S =	ANGULAR ±2°	CHECKED BY & DATE			
SPC		SEE ECN			
Uti+Mate		APPROVED BY & DATE			
58967		SEE ECN			
		CAD FILENAME			
		SD-812071000.DWG			
		PART NO.			
		812071000			
		DRAWING NO.			
		SD-812071000			
		SHEET NO.			
		1 OF 1			
		PART REV			
		-			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO UTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.