


PART DWG	DATE	ECN NO.	APPVD BY	REL BY
REV	ISSUE			
-	11/08/17	UM6550	T-POMBART	PER

WIRING COLOR CODE

1, 11	BLACK
2, 12	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GRAY
10	WHITE

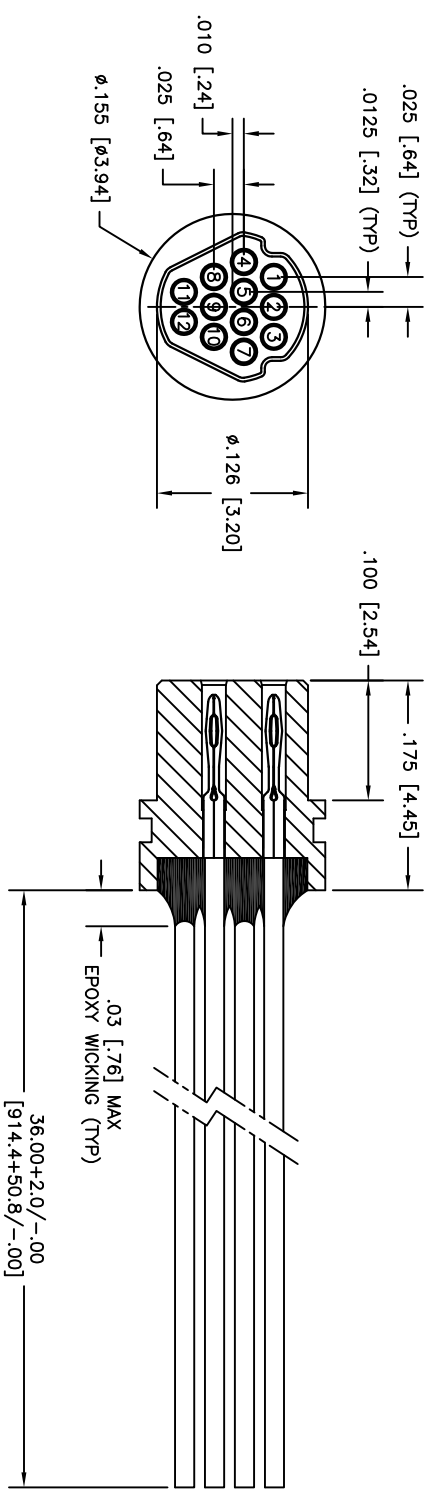

- 3. PERFORMANCE:** MANUFACTURED TO MEET THE FOLLOWING M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 DMV: 250 VAC
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 LEADS: 30 AWG, NEMA HP3, TYPE ET, COLOR CODED PER MIL-DTL-681, SYSTEM 1
 EXCEPT USING 10 SOLID REPEATING COLORS
- 2. MATERIALS:** INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F
 CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 LEADS: 30 AWG, NEMA HP3, TYPE ET, COLOR CODED PER MIL-DTL-681, SYSTEM 1
 EXCEPT USING 10 SOLID REPEATING COLORS
- 1. MARKINGS:** UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
- NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	10:1	B		
CRITICAL C/ =	3 PLACE ±.005	DRAWN BY & DATE			
SPC S/ =	2 PLACE ±.010	PER 11-07-17			
	ANGULAR ±2°	CHECKED BY & DATE			
		SEE ECN			
		APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME			
		SD-821061130.DWG			
		PART NO.			
		821061130			
		DRAWING NO.			
		SD-821061130			
		SHEET NO.			
		1 OF 1			
		PART REV			
		-			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.