


PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV ISSUE	12/30/16	UMI6187	TPOMBART	PER

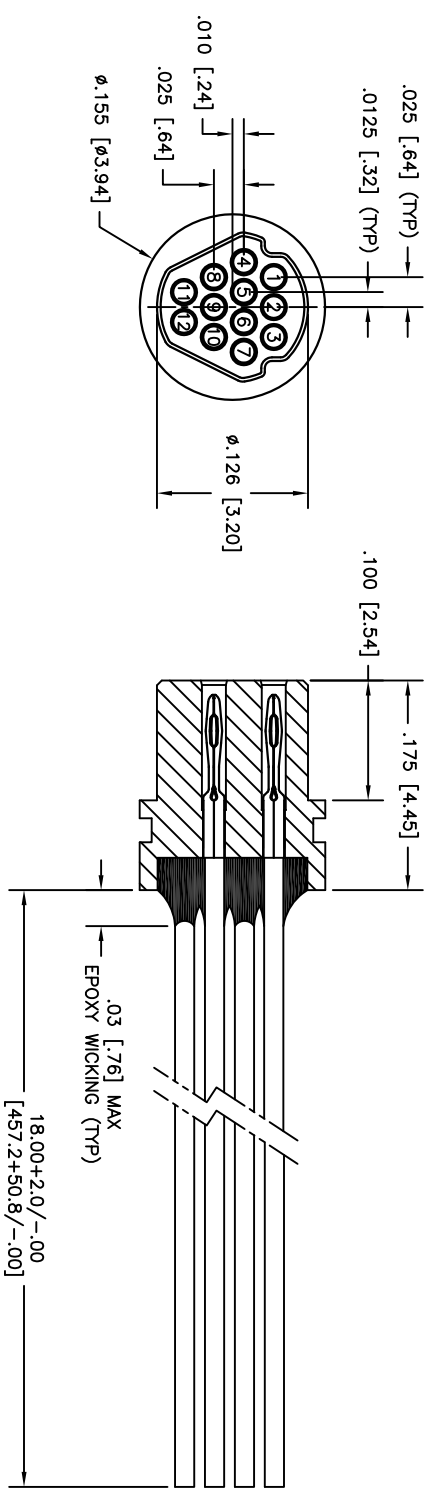

- 3. PERFORMANCE:** MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 DMV: 250 VAC
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.071 VOLT MAXIMUM DROP @ 1.0 AMPS (.071 OHMS)
 W/6.00" OF WIRE LISTED BELOW, PER MIL-DTL-32139
- 2. MATERIALS:** INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F
 CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 LEADS: 30 AWG, SAE-AS22759/35, WHITE
- 1. MARKINGS:** UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
- NOTES:** UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
HAZAR =	GENERAL TOLERANCES:	10:1	B		
CRITICAL C/ =	3 PLACE ±.005	DRAWN BY & DATE			
SPC S/ =	2 PLACE ±.010	CHECKED BY & DATE			
	ANGULAR ±2°	SEE ECN			
		APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME			
		SD-821061320.DWG			
		PART NO.			
		821061320			
		DRAWING NO.			
		SD-821061320			
		SHEET NO.			
		1 OF 1			
		REV			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.