
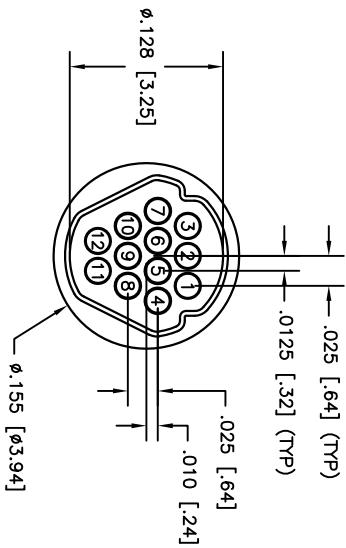


WIRING COLOR CODE	
1, 11	BLACK
2, 12	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GRAY
10	WHITE

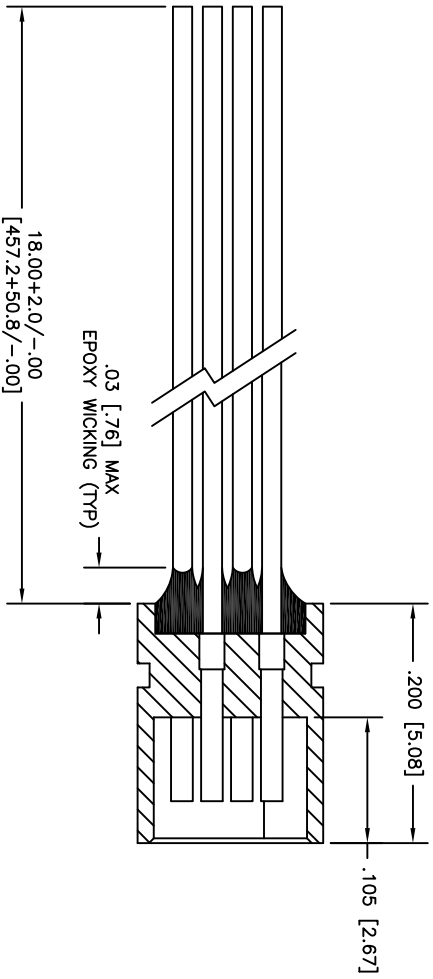

- 3. PERFORMANCE:** MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 DMV: 250 VAC
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.071 VOLT MAXIMUM DROP @ 1.0 AMPS (.071 OHMS)
 W/6.00" OF WIRE LISTED BELOW, PER MIL-DTL-32139
- 2. MATERIALS:** INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F
 CONTACT: BRASS ALLOY 260, GOLD PLATED PER ASTM B488
 LEADS: 30 AWG, NEMA HF3, TYPE ET, COLOR CODED PER MIL-DTL-681, SYSTEM 1
 EXCEPT USING 10 SOLID REPEATING COLORS
- 1. MARKINGS:** UMI, UMI P/N, DATE CODE & W/O NO. ON BAG OR TAG
- NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS MAJOR = CRITICAL = SPC = S =	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.010 ANGULAR ±2°	SCALE 10:1 DRAWN BY & DATE PER 05-08-17 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	CAD FILENAME SD-822061120.DWG	PART NO. 822061120	DRAWING NO. SD-822061120	SHEET NO. 1 OF 1

PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV ISSUE				
-	05/15/17	UM6351	TPOMBART	PER