


10 9 8 7 6 5 4 3 2

PART DWG	REV	DATE	ECN NO.	APP'D BY	REL BY
-	-	02/13/12	UM4570	T.POMBARAT	PER

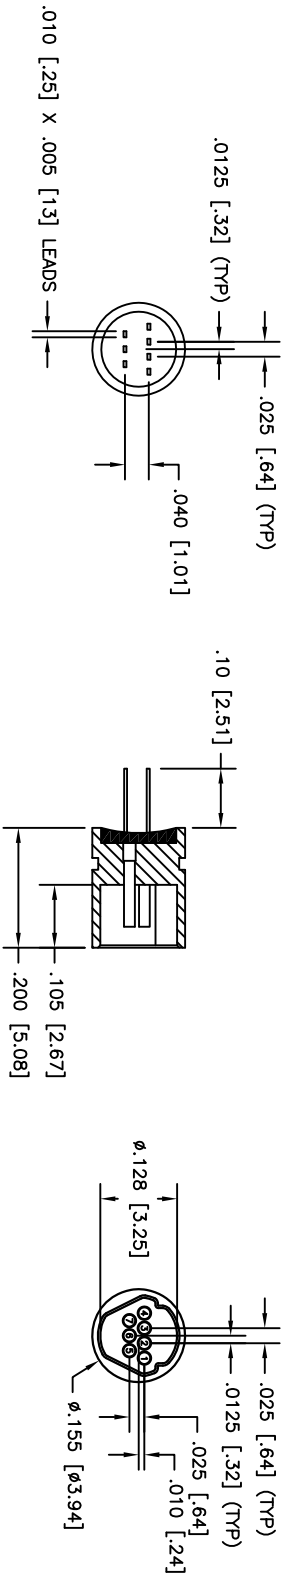

3. PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.021 VOLT MAXIMUM DROP @ 1.0 AMPS (.021 OHMS)
2. MATERIALS: INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F
 CONTACTS: BRASS ALLOY 735, GOLD PLATED PER ASTM B488
 LEADS: SN/PB PLATED
1. MARKINGS: BAG OR TAG WITH UMI, DATE CODE, UMI P/N AS SPACE PERMITS
- NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
HAZAR =	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.010 ANGULAR ±2°	DRAWN BY & DATE PER 02-13-12	B	⊙	
CRITICAL =		CHECKED BY & DATE			
SPC =		SEE ECN			
S =		APPROVED BY & DATE			
	Uti+ - Mate CAGE CODE 58967	SEE ECN			
		CAD FILENAME SD-822090002.DWG			
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO UTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			
		PART NO. 8220900002			
		DRAWING NO. SD-822090002			
		SHEET NO. 1 OF 1			
		REV -			