
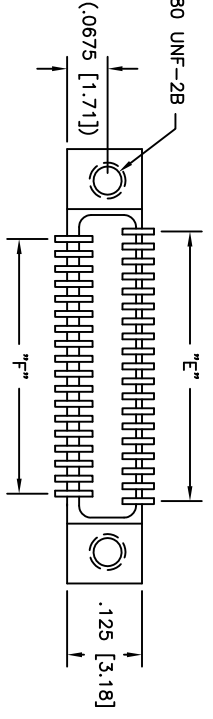
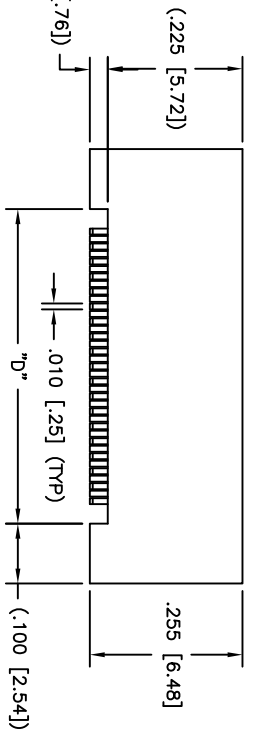
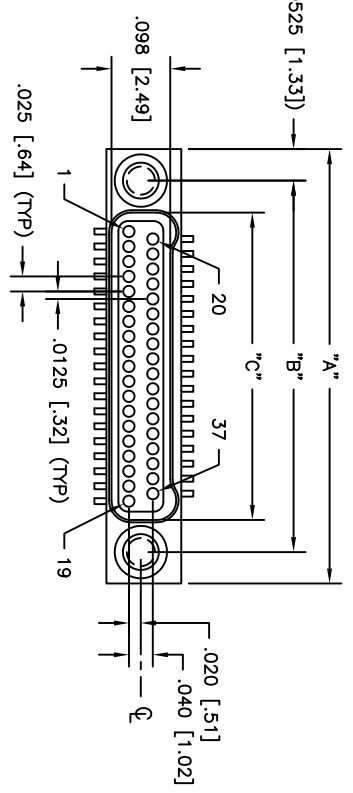
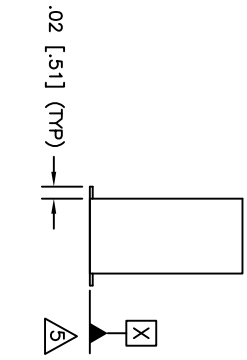


PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV	ISSUE	UMI4305	T.POMBART	PER
A	02/17/11	UMI7610	T.POMBART	PER
A	11/19/20			

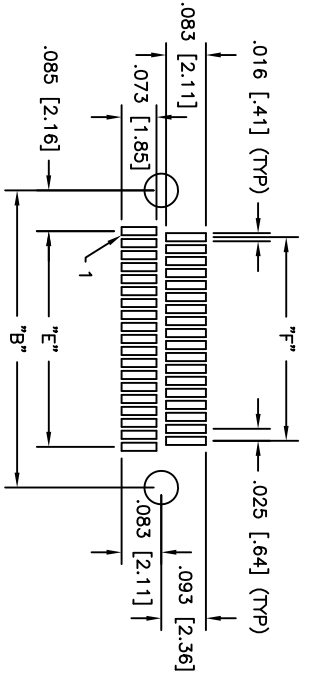

PART NO.	SIZE	"A"	"B"	"C"	"D"	"E"	"F"
83241317	9	.375 [9.52]	.270 [6.86]	.163 [4.06]	.175 [4.44]	.100 [2.54]	.075 [1.90]
832421317	15	.450 [11.43]	.345 [8.76]	.238 [5.97]	.250 [6.35]	.175 [4.44]	.150 [3.81]
832431317	21	.525 [13.33]	.420 [10.67]	.313 [7.87]	.325 [8.25]	.250 [6.35]	.225 [5.71]
832441317	25	.575 [14.60]	.470 [11.94]	.363 [9.14]	.375 [9.52]	.300 [7.62]	.275 [6.98]
832451317	31	.650 [16.51]	.545 [13.84]	.438 [11.05]	.450 [11.43]	.375 [9.52]	.350 [8.89]
832461317	37	.725 [18.41]	.620 [15.75]	.513 [12.95]	.525 [13.33]	.450 [11.43]	.425 [10.79]
832471317	51	.900 [22.86]	.795 [20.19]	.688 [17.40]	.700 [17.78]	.625 [15.87]	.600 [15.24]
832481317	65	1.075 [27.30]	.970 [24.64]	.863 [21.84]	.875 [22.22]	.800 [20.32]	.775 [19.68]

- LEAD TOLERANCE: LEADS TO BE CO-PLANAR WITHIN +.003/- .001 FROM SURFACE "X"
- PERFORMANCE: MANUFACTURED TO THE FOLLOWING M32139 PERFORMANCE SPECIFICATIONS
 - CONTRACT RATING: 1 AMPERE MAXIMUM AT AMBIENT TEMPERATURE
 - DMV: 250 VAC
 - INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 - CONTACT RESISTANCE: 0.021 VOLT MAXIMUM DROP @ 1.0 AMPS (.021 OHMS)
- INTERMATEABILITY: INTERFACE DIMENSIONS PER MIL-DTL-32139
- MATERIALS: SHELL: ALUMINUM 6061-T6, ELECTROLES NICKEL PLATED PER AMS2404
INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLP-30F
CONTACT: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
LEADS: Sn/Pb PLATED
- MARKINGS: UMI, UMI P/N, DATE CODE & W/O NO. AS SPACE PERMITS OTHERWISE ON BAG OR TAG

QUALITY UNLESS SPECIFIED:
 ALL DIMENSIONS IN INCHES
 GENERAL TOLERANCES:
 3 PLACE ±.005
 2 PLACE ±.010
 ANGULAR ±2°

SCALE: DWG SIZE B
 DRAWN BY & DATE: UMI 03-09-10
 CHECKED BY & DATE:
 APPROVED BY & DATE:
 SEE ECN

TITLE: NANO-D DUAL ROW CONNECTOR
 FEMALE, SIZE XX, CNM26LXX-2S071-S01

PART NO. SD-832461317
 DRAWING NO. SD-832461317

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTIMATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

CONNECTOR INC.

SPC SYMBOLS	Uti+ - Mate	CAGE CODE	58967
-------------	-------------	-----------	-------