
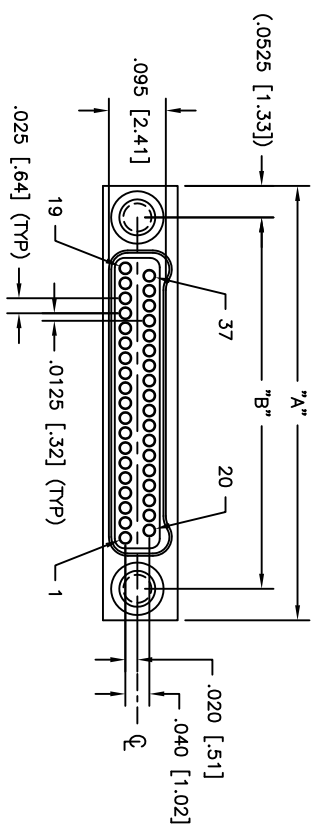
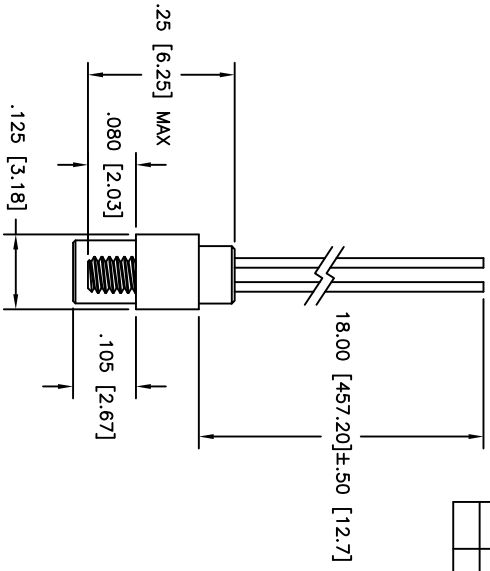


PART DWG	DATE	ECN NO.	APP'D BY	REL BY
REV	ISSUE		T-POMBART	PER
-	12/18/13	UM15189		

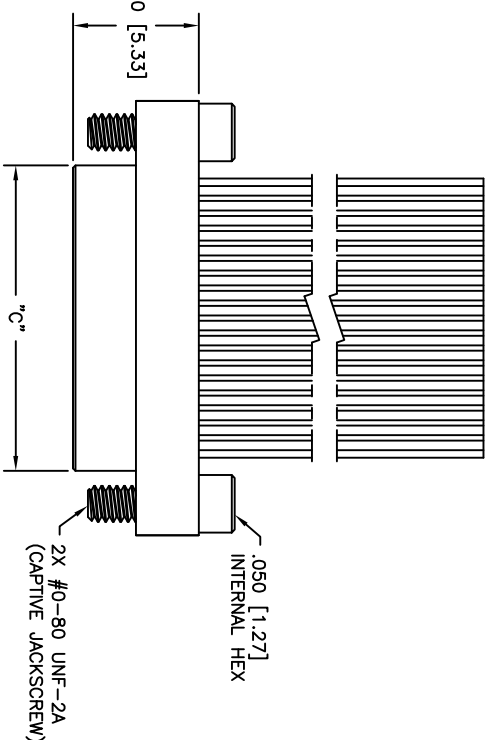

PART NO.	SIZE	"A"	"B"	"C"
833311522	9	.375 [9.52]	.270 [6.86]	.160 [4.06]
833321522	15	.450 [11.43]	.345 [8.76]	.235 [5.97]
833331522	21	.525 [13.33]	.420 [10.67]	.310 [7.87]
833341522	25	.575 [14.60]	.470 [11.94]	.360 [9.14]
833351522	31	.650 [16.51]	.545 [13.84]	.435 [11.05]
833361522	37	.725 [18.41]	.620 [15.75]	.510 [12.95]
833371522	51	.900 [22.86]	.795 [20.19]	.685 [17.40]
833381522	65	1.075 [27.30]	.970 [24.64]	.860 [21.84]

- PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS  
 CONTACT RATING: 1 AMPERE MAXIMUM  
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC  
 CONTACT RESISTANCE: 0.071 VOLT MAXIMUM DROP @ 1.0 AMPS (.071 OHMS)  
 W/6.00" OF WIRE LISTED BELOW, PER MIL-DTL-32139
  - MATERIALS: SHELL: ALUMINUM 6061-T6, ELECTROLESS NICKEL PLATED PER AMS2404  
 INSULATOR: LCP (LIQUID CRYSTAL POLYMER) GLCP-30F  
 CONTACT: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488  
 LEADS: 30 AWG, NEMA HP3, TYPE ET, WHITE, 18.0" +0.5/-0.0 LONG  
 HARDWARE: 303 STAINLESS PER ASTM 582
  - MARKINGS: UMI, DATE CODE, UMI P/N AS SPACE PERMITS
- NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR = 1	GENERAL TOLERANCES:	5:1	B		
CRITICAL = C	3 PLACE ±.005	DRAWN BY & DATE	12-18-13	TITLE	NANO-D DUAL ROW CONNECTOR
SPC = S	2 PLACE ±.010	CHECKED BY & DATE		MATERIAL	MALE, SIZE XX, NMLXX-2P02-30F1-18.0 S01
	ANGULAR ±2°	APPROVED BY & DATE			
		SEE ECN			
		CAD FILENAME	SD-833361522.DWG	PART NO.	SD-833361522
		Uti+MATE CASE CODE	58967	DRAWING NO.	SD-833361522
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				SHEET NO.	1 OF 1
				REV	-