


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	10/13/15	UMI 6517	DW	DW

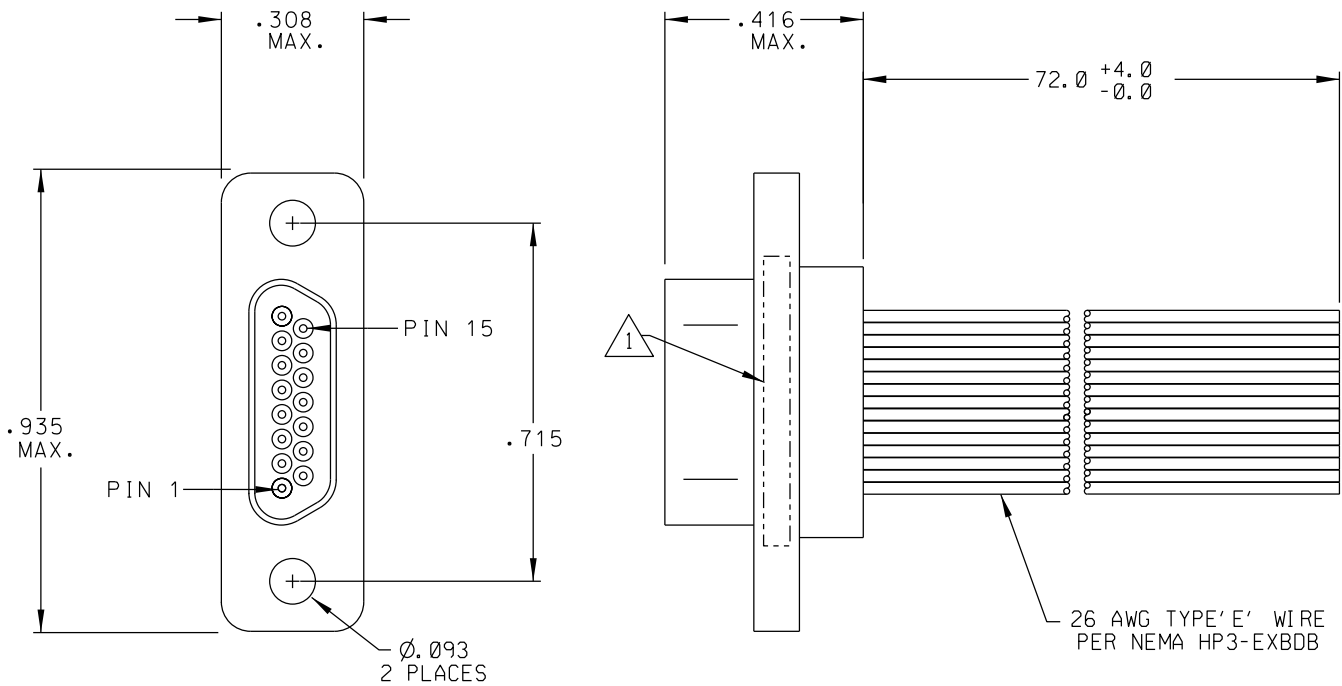

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	W/BLK
12	W/BRN
13	W/RED
14	W/ORG
15	W/YEL

26 AWG TYPE 'E' WIRE
PER NEMA HP3-EXBDB

3. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
DWV: 600 VAC
TEMPERATURE RATING: 125°C

2 MATERIALS:
SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8,
NICKEL PLATED PER AMS 2404
INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194,
GOLD PLATED PER ASTM B488

1 MARKING: UMI, DATE CODE, UMI P/N, WORK ORDER NUMBER
NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY S K	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 4 : 1 DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE DU 10-13-15 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN	TITLE: MICRO-D PLUG, MR15P0-26E5-72.0-S01		MATERIAL: 2 Ulti-Mate Connector Inc.	
		CAD FILENAME SD-8341 21 030.DGN	PART NO. 8341 21 030	DRAWING NO. SD-8341 21 030	SHEET NO. 1 OF 1	PART REV -
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					