


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	9/17/12	UMI4717	DW	DW

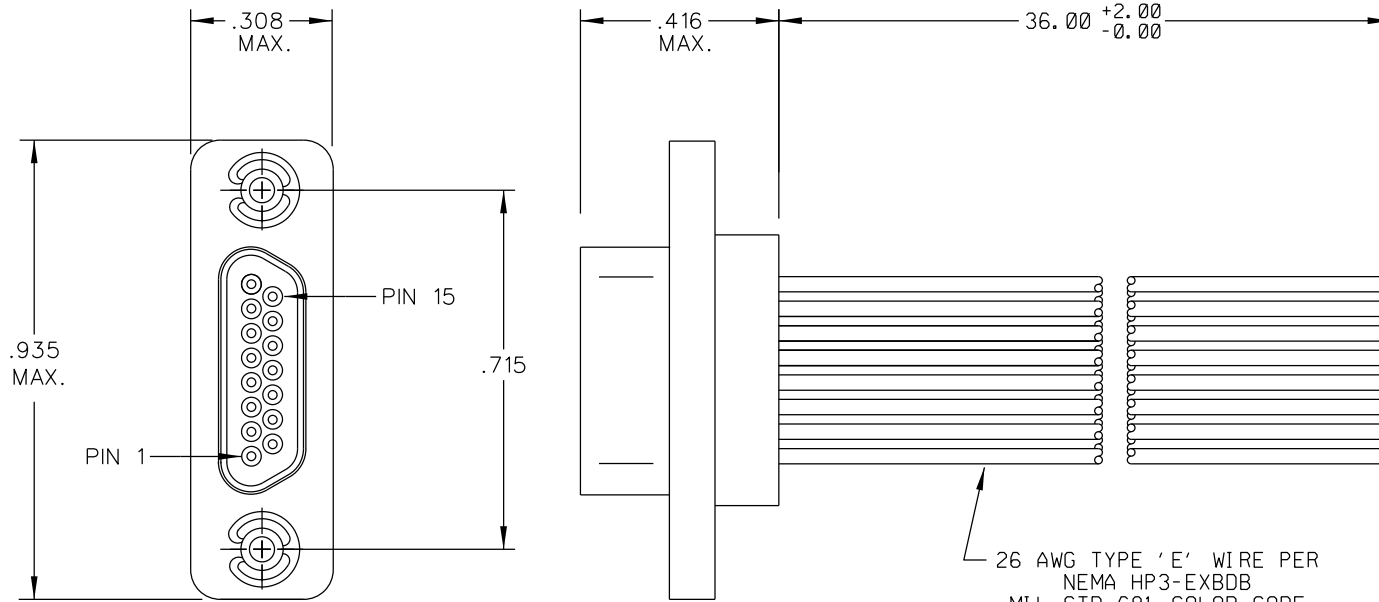

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	W/BLK
12	W/BRN
13	W/RED
14	W/ORG
15	W/YEL

MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8,
 NICKEL PLATED PER AMS 2404.
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK.
 PIN CONTACT: C17200 BERYLLIUM COPPER ALLOY PER ASTM B194,
 GOLD PLATED PER ASTM B488.
 HARDWARE: PASSIVATED STAINLESS STEEL IAW MIL-DTL-83513/5.
 1. MARKINGS: "UMI", UMI DATE CODE, AND UMI PART NUMBER.
 NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 4 : 1 DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE DU 9-17-12 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN	TITLE: MICRO-D PLUG, SIZE 15, 36" 26 AWG TYPE "E" LEADS, MRI 5P0-26E5-36.0-S01		
		CAD FILENAME SD-834121530.DGN	MATERIAL: 	Ulti-Mate Connector Inc.	
		PART NO. 8341 21 530	DRAWING NO. SD-834121530	SHEET NO. 1 OF 1	PART REV -

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.