

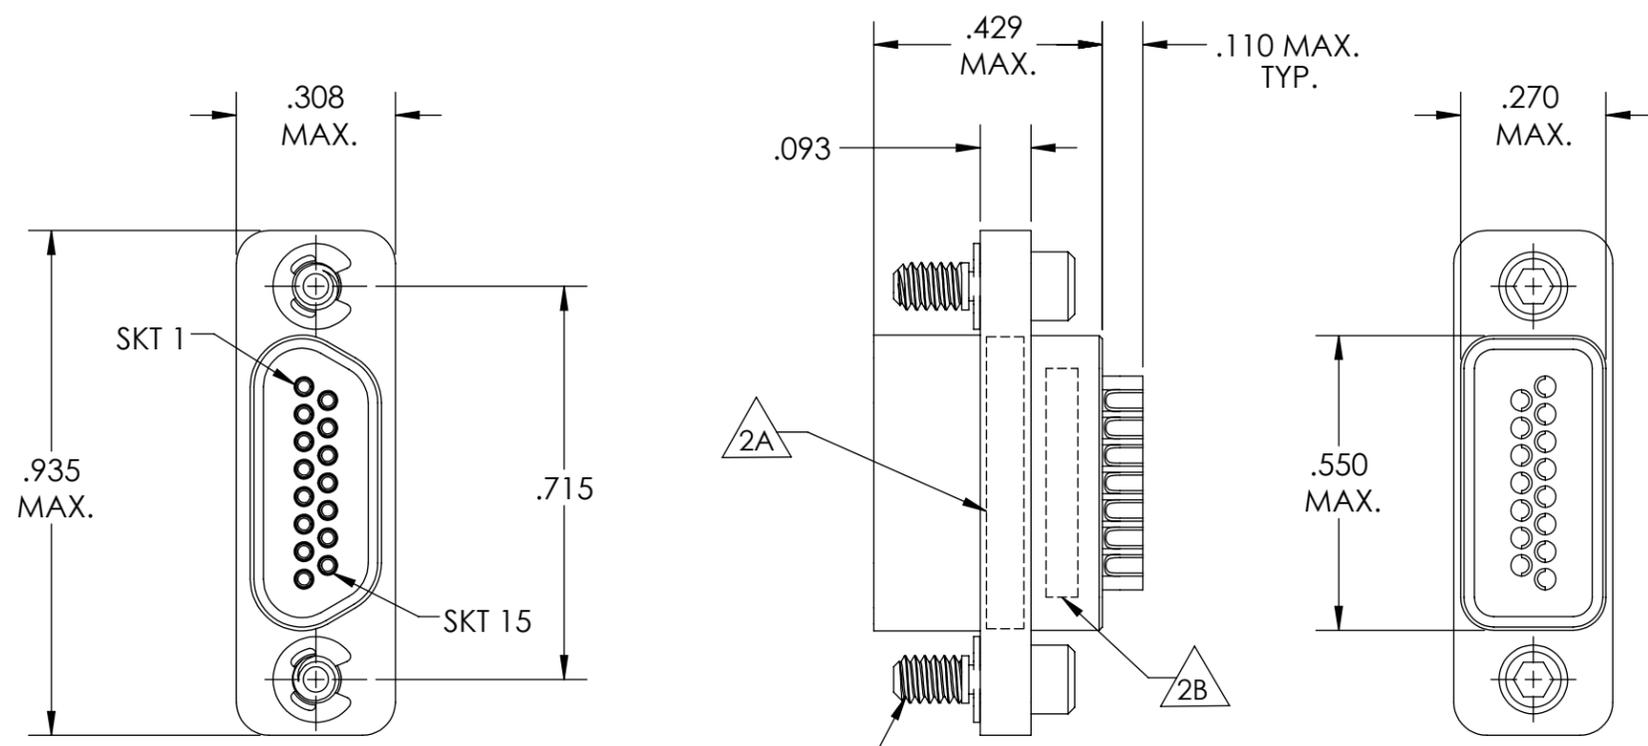


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	4/3/18	UMI6720	DW	DW

F
E
D
C
B
A

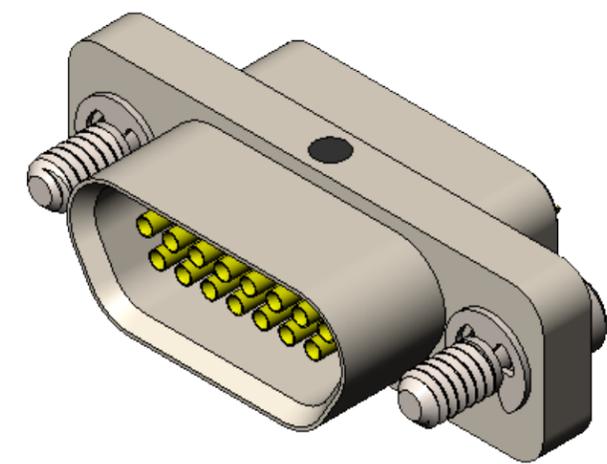

2-56 JACKSCREW
LOW-PROFILE ALLEN HEAD
2X

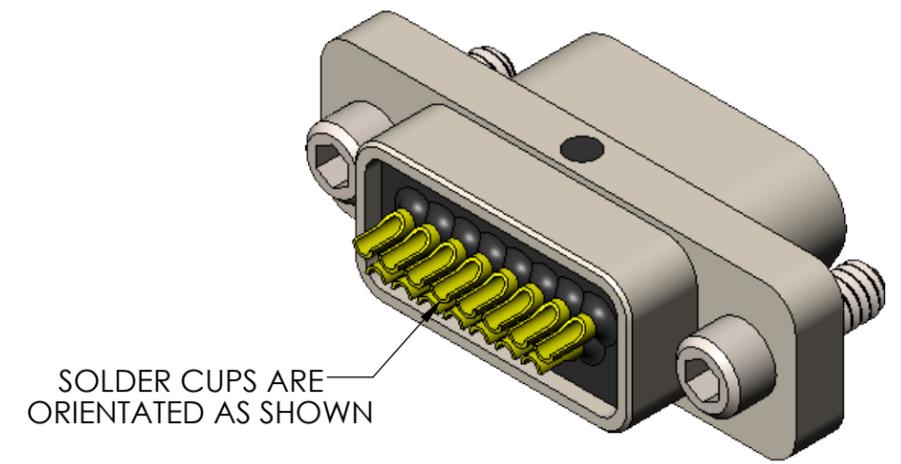

- 5. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.
- 4. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
INSULATION RESISTANCE: 5000 MEGOHM MIN.
DWV: 600 VAC
TEMPERATURE RATING: 125° C

3 MATERIALS:
SHELL: 6061-T6 ALUMINUM PER AMS-Q-Q-A200/8, NICKEL PLATED PER AMS-2404
INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
SOCKET CONTACTS/SOLDER CUPS: C31400 COPPER ALLOY PER ASTM B140, GOLD PLATED PER ASTM B488
HARDWARE: PASSIVATED STAINLESS STEEL IAW MIL-DTL-83513/5
INTERFACIALE SEAL: FLUOROSILICONE PER MIL-R-25988

- 2. MARKING: "UMI", UMI PART NUMBER
 DATE CODE, UMI WORK ORDER NUMBER

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES GENERAL TOLERANCES: 3 PLACES ±.005 [.127] 2 PLACES ±.01 [.25] ANGULAR ±2° [50°]	SCALE: 3:1 DWG SIZE: B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
	ULTI-MATE CAGE CODE 58967	DRAWN BY & DATE: DU 4/3/18 CHECKED BY & DATE: DW 4/3/18 APPROVED BY & DATE: DW 4/3/18	TITLE: CONNECTOR ASSEMBLY, MR15T02-S01		MATERIAL:	
		CAD FILE NAME: SD-834221002.SLDDRW	PART NO.: 834221002	ENG PROJECT #: NONE		
		DRAWING NO.: SD-834221002		SHEET NO.: 1 of 1	PART REV.: -	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.