

SD-836778818  
 APPVD BY REL BY

2  
 ECN NO.  
 UMI4739

3  
 PART DWG DATE  
 REV ISSUE 10/4/12

4

5




6

7

8

9

10

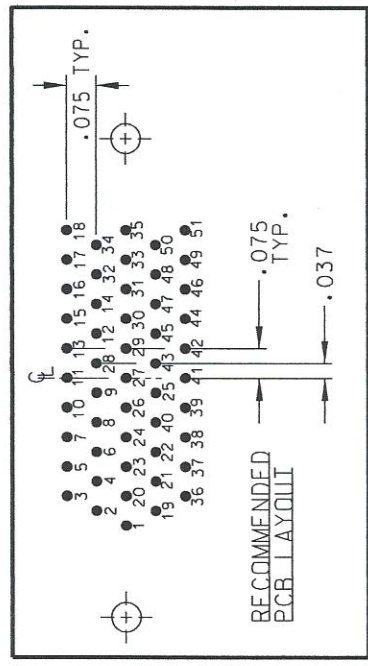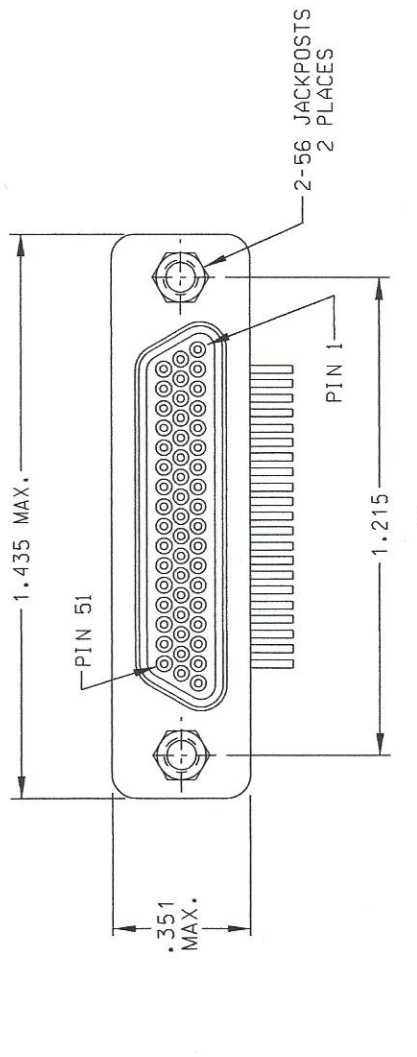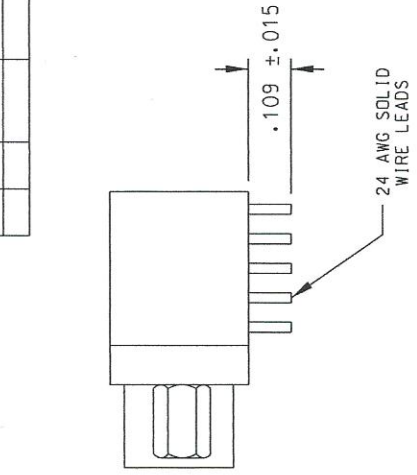

- 3 NUMBERS ON BACKSHELL ARE SHOWN FOR REFERENCE ONLY AND DO NOT APPEAR ON PART
- 2 MATERIALS: PPS PER MIL-M-24519, GST-40F, COLOR: BLACK SHELL AND BACKSHELL; BERYLLIUM COPPER PER ASTM B194, PIN CONTACTS; C17200 BERYLLIUM COPPER PER ASTM B488 GOLD PLATED PER ASTM B488
- 24 AWG LEADS: TIN PLATED COPPER ALLOY PER A-A-59551 TYPE S
- THREADED INSERT: PASSIVATED STAINLESS STEEL IAW MIL-DTL-8351 3/5
- 1. MARKING: "UMI", UMI DATE CODE, UMI PART NUMBER.

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 3 : 1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
QUALITY SYMBOLS MAJOR CRITICAL SPC	DRAWN BY & DATE DU 10/4/12	CHECKED BY & DATE	TITLE: MICRO-D CIRCUIT CONNECTOR, CB8R51-3P07T-S01	
UNI-Mate CAGE CODE <b>58967</b>	APPROVED BY & DATE	MATERIAL: Uti-Mate	PART NO. 836778818	DRAWING NO. SD-836778818
			SHEET NO. 1	OF 1
			REV	-

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTIMATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.