



PART DWG	DATE	ECN NO.	APPD BY	REL BY
REV	ISSUE			
-	-	UMI6987	T-POMBART	PER

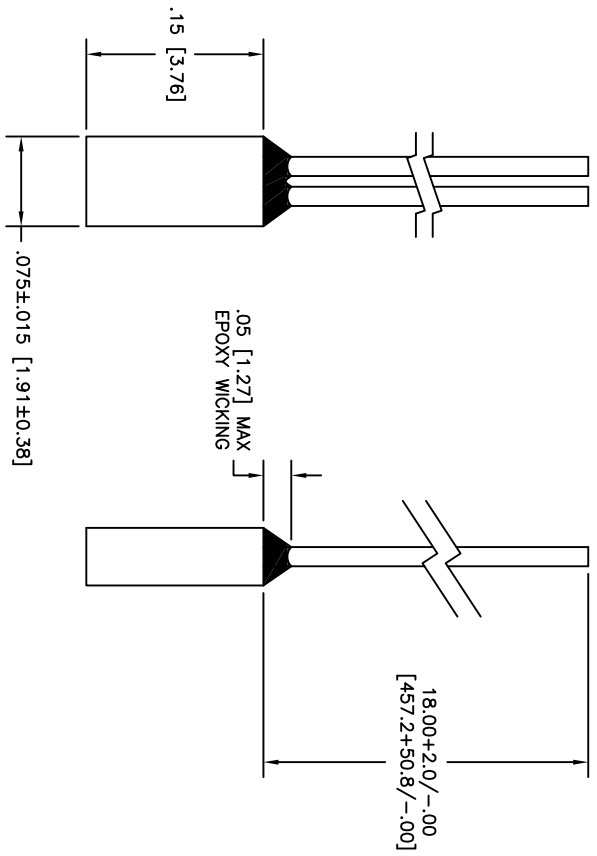

- PERFORMANCE: MEETS OR EXCEEDS M32139 PERFORMANCE SPECIFICATIONS
 CONTACT RATING: 1 AMPERE MAXIMUM
 DWV: 250 VAC
 INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM @ 100 VDC
 CONTACT RESISTANCE: 0.021 VOLT MAXIMUM DROP @ 1.0 AMPS (.021 OHMS)
- MATERIALS: INSULATOR: PPS (POLYPHENYLENE SULFIDE) GST-40F
 CONTACTS: BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 LEADS: 32 AWG, NEMA HP3, TYPE ET, WHITE
- MARKINGS: BAG OR TAG WITH UMI, UMI P/N, DATE CODE & W/O NO.
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED, ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR =	GENERAL TOLERANCES:	10:1	B	☉	
CRITICAL =	3 PLACE ±.005	DRAWN BY & DATE	PER 12-20-18	TITLE:	NANO STRIP CONNECTOR
C =	2 PLACE ±.010	CHECKED BY & DATE	SEE ECN	MATERIAL:	MALE (PLUG), SIZE 02, WIRED, NSR02P0-32F1-18.0
S =	ANGULAR ±2°	APPROVED BY & DATE	SEE ECN		
SPC		CAD FILENAME	PART NO.	DRAWING NO.	Uti-Mate Connector Inc.
≠		SD-837025460.DWG	837025460	SD-837025460	SHEET NO. 1 OF 1
		Uti-Mate CASE CODE 58967			PART REV -

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO UTTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.