
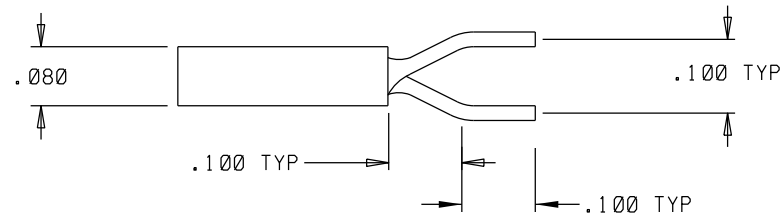
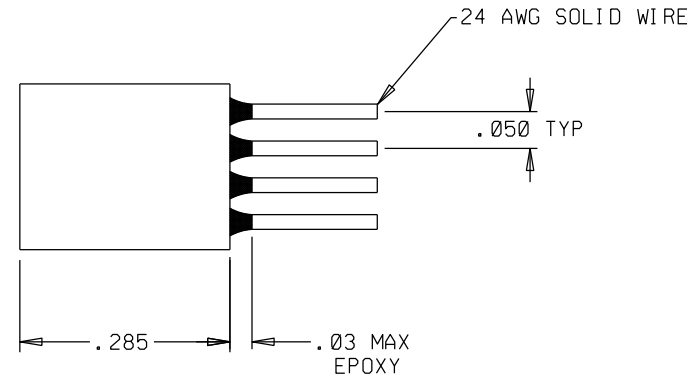


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	9-22-10	UMI 4179	DW	DW

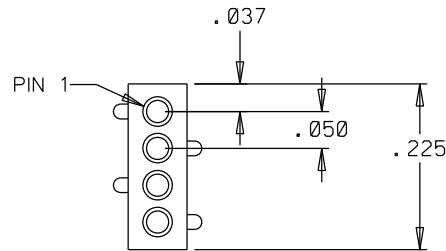

(EPOXY NOT SHOWN IN THIS VIEW FOR CLARITY)

3. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3 AMPS
 DWV: 600 VAC
 TEMPERATURE RATING: -55°C TO 125°C
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.

2. MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: GOLD PLATED BERYLLIUM COPPER
 24 AWG LEADS: TIN PLATED COPPER ALLOY

1. MARKING: NONE

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 9-22-10	TITLE: STRIP CONNECTOR, MALE, 4 POS., SR04P0-L04		
SPL/MINOR	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	CHECKED BY & DATE SEE ECN	MATERIAL: 2		
SPL/MAJOR		APPROVED BY & DATE SEE ECN	Uti-Mate Connector Inc.		
KEY	Ulti-Mate CAGE CODE 58967	CAD FILENAME SD-837041220.DGN	PART NO. 837041220	DRAWING NO. SD-837041220	SHEET NO. 1 OF 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			