
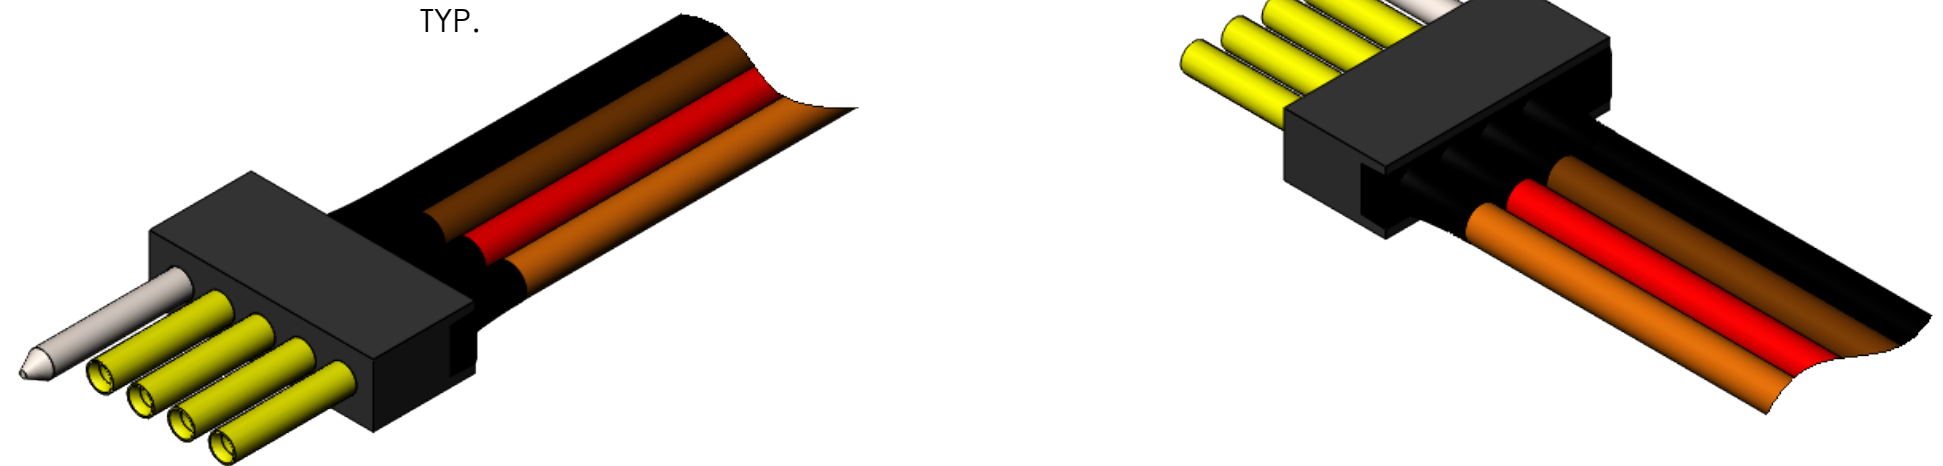


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
D	D	9/22/10	UMI4177	DW	DW
E	E	9/26/14	UMI5431	DW	DW
F	F	3/30/18	UMI6719	DW	DW
G	G	10/31/18	UMI6932	DW	DW
H	H	12/06/18	UMI6965	FA	DW

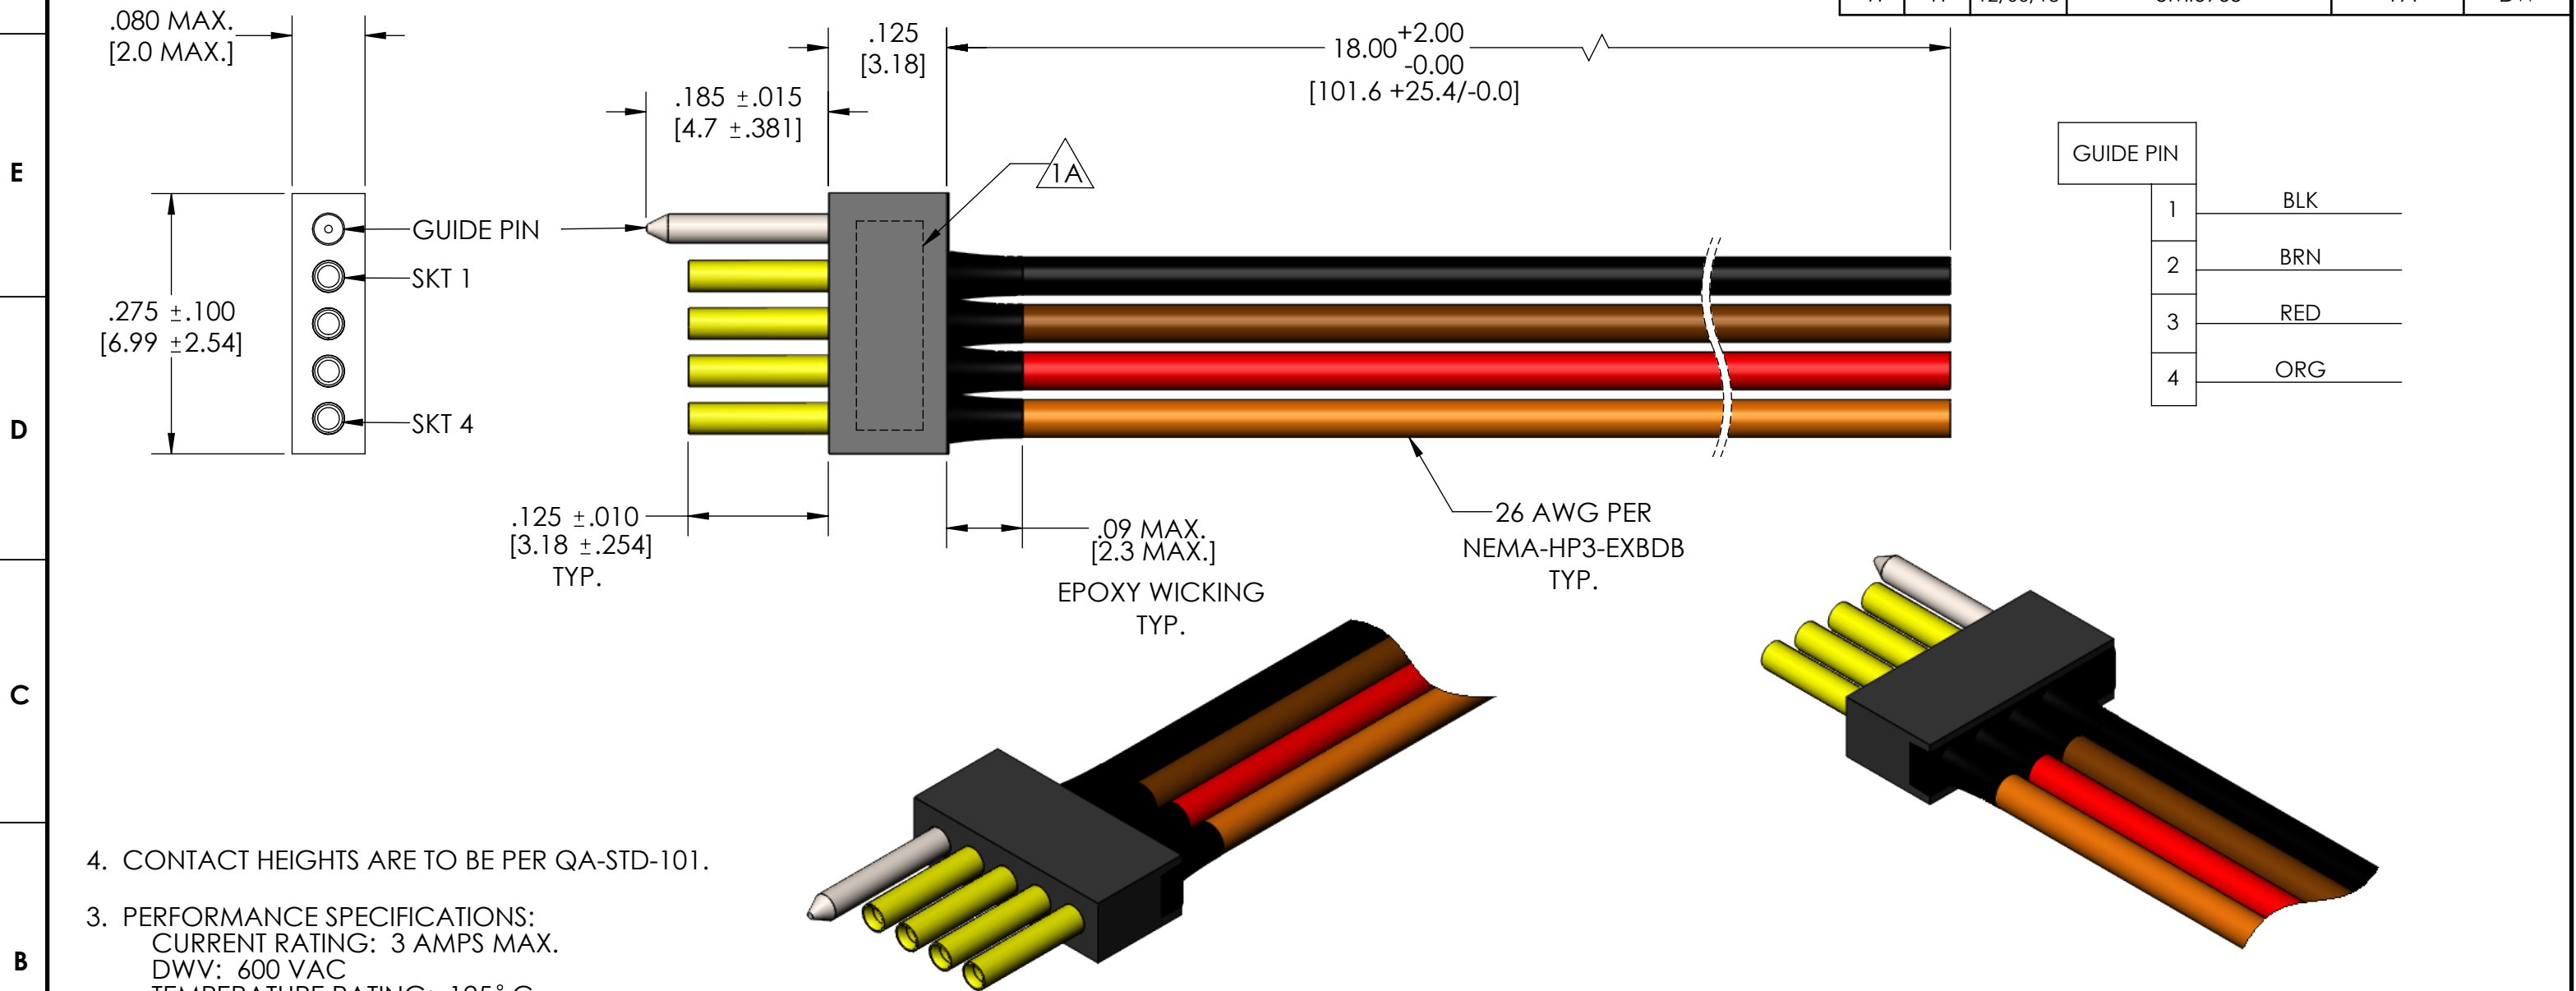

- 4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.
- 3. PERFORMANCE SPECIFICATIONS:
CURRENT RATING: 3 AMPS MAX.
DWV: 600 VAC
TEMPERATURE RATING: 125° C

2 MATERIALS:
STRIP INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM-B488
WIRES: 26 AWG PER NEMA-HP3-EXBDB
GUIDE PIN: PASSIVATED STAINLESS STEEL, 300 SERIES

- 1. MARKING: $\triangle 1A$ UMI WORK ORDER NUMBER
 $\triangle 1B$ BAG AND TAG WITH "UMI", DATE CODE, UMI PART NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL $\triangle C$ MAJOR \blacktriangledown NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE IN INCHES	SCALE 6:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES $\pm .005$ 2 PLACES $\pm .01$ ANGULAR $\pm 2^\circ$ ULTI-MATE CAGE CODE 58967	DRAWN BY & DATE DU 3/30/18	TITLE: MICRO STRIP CONNECTOR, SR04S1-26E5-18.0			
		CHECKED BY & DATE DW 3/30/18	MATERIAL: $\triangle 2$	ENG PROJECT #: NONE		
		APPROVED BY & DATE DW 3/30/18	PART NO. 837042041	DRAWING NO. SD-837042041	SHEET NO. 1 of 1	
CAD FILE NAME SD-837042041.SLDDRW		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				
		PART REV. H				