



REVISIONS

| PART REV. | DWG. ISSUE | DATE | ECN NO. | APPVD. BY | REL. BY |
|-----------|------------|------------|---------|-----------|---------|
| - | - | 12/18/2013 | UMI5185 | DW | DW |
| A | A | 07/18/2016 | UMI6035 | DW | DW |

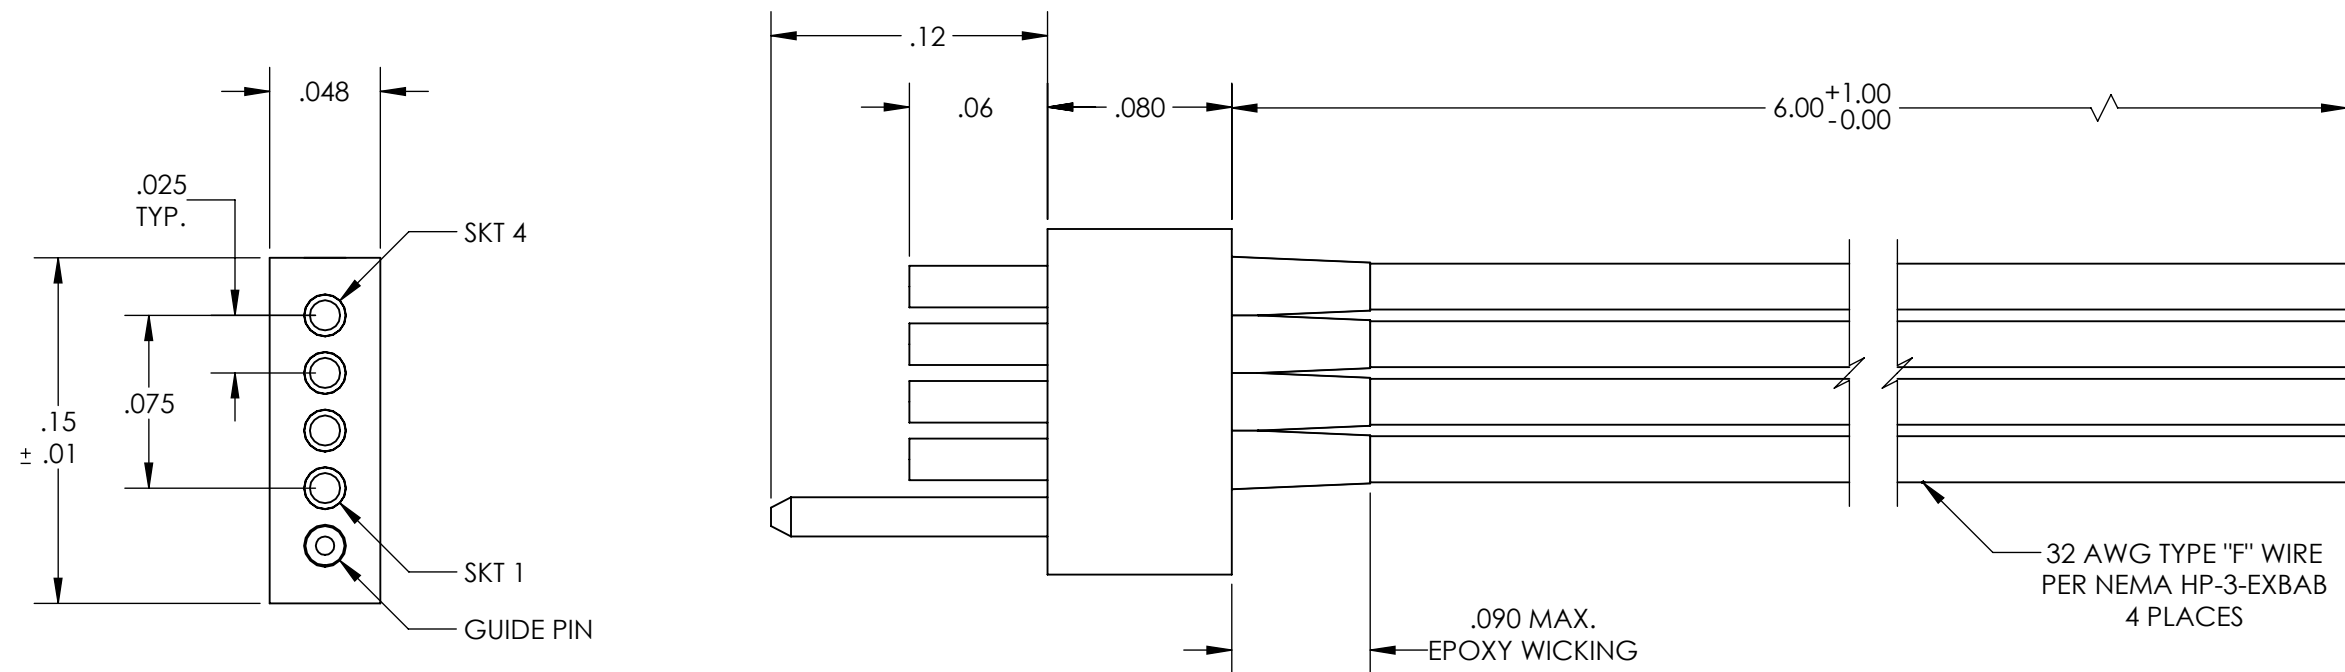

COLOR CODE

| | |
|---|-----|
| 1 | BLK |
| 2 | BRN |
| 3 | RED |
| 4 | ORG |

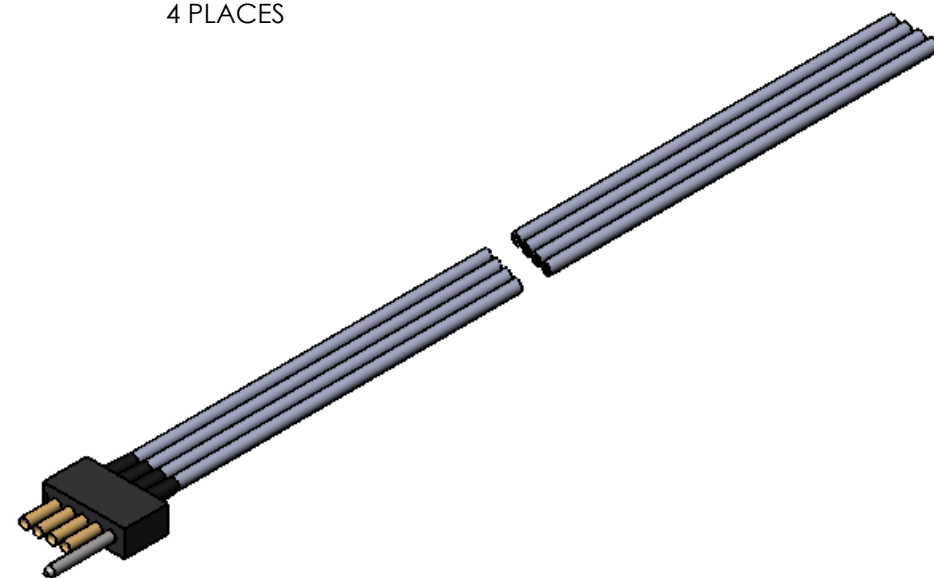

3. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 1A MAX.
 INSULATION RESISTANCE: 5000 MΩ MIN.@100VDC
 DWV: 250 VAC
 TEMPERATURE RATING: 125°C

△ MATERIALS:
 BODY: PPS PER MIL-M-24519 GST-40F, COLOR: BLK
 SOCKET CONTACTS: C73500 COPPER ALLOY PER ASTM B122, GOLD PLATED PER ASTM B488
 GUIDE PIN: PASSIVATED 300 SERIES STAINLESS STEEL

1. MARKINGS: NONE

NOTES: UNLESS OTHERWISE SPECIFIED

| | | | | | | |
|---|---|---|-----------------------------|----------------------------|-----------------------|--|
| QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOL = MINOR DIMENSION | UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2° ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967 | SCALE 12:1 DWG SIZE B | THIRD ANGLE PROJECTION | REVISE ON CAD ONLY | | |
| | DRAWN BY & DATE JB 12/18/2013 CHECKED BY & DATE DW 12/18/2013 APPROVED BY & DATE DW 12/18/2013 | TITLE NANO STRIP CONNECTOR, WIRED, RECEPTACLE, SIZE 4 W/GUIDE PINS NSR-04S1-32F-6.0 | | MATERIAL | ENG PROJECT # E150 | |
| | CAD FILENAME SD-837046421.slddrw | PART NO. 837046421 | DRAWING NO. SD-837046421 | SHEET NO. 1 OF 1 | SHEET NO. | |
| | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. | | | PART REV. A | | |