








PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
A	-	4-15-11	UMI4701		

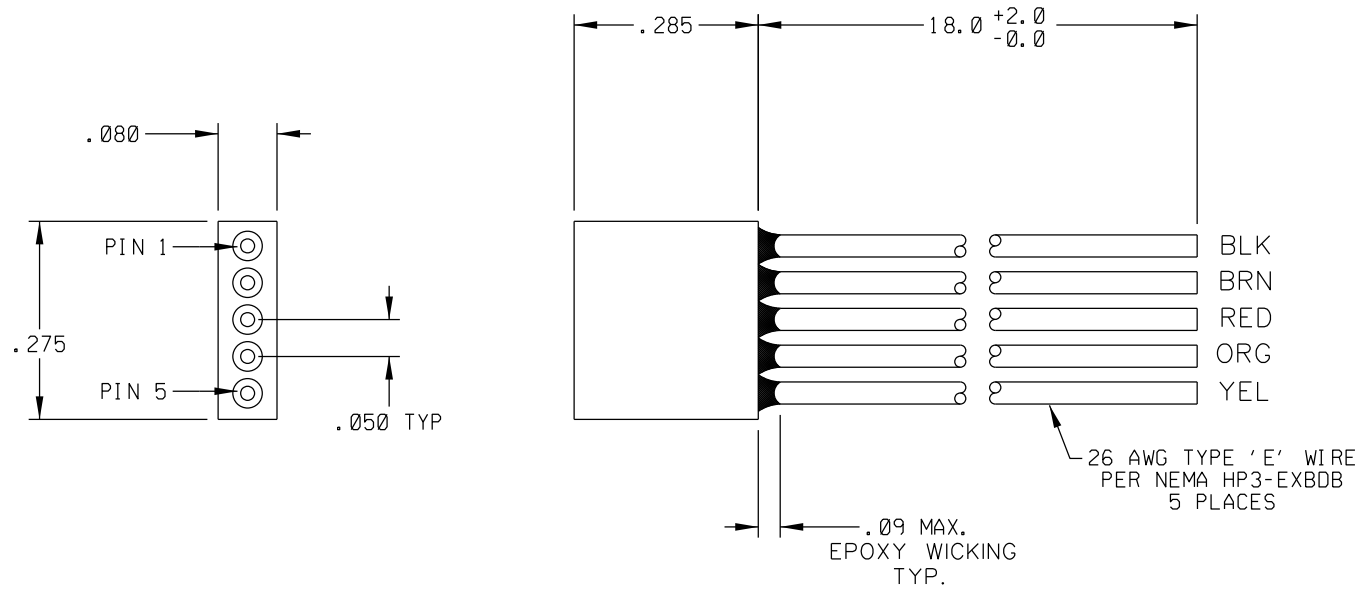


**MATERIAL:**  
 BODY/INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK  
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B-194,  
 GOLD PLATED PER ASTM B488

1. MARKING: NONE.

NOTES: UNLESS OTHERWISE SPECIFIED.

<b>QUALITY SYMBOLS</b> MAJOR  CRITICAL  SPC 	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 6 : 1 DWG SIZE B DRAWN BY & DATE DW 9-5-12 CHECKED BY & DATE APPROVED BY & DATE	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	
	Uti-Mate CAGE CODE <b>58967</b>	CAD FILENAME SD-837051 040.DGN PART NO. 837051 040 DRAWING NO. SD-837051 040	TITLE: STRIP CONNECTOR, MALE, 5 POSITION, 26 AWG LEADS, SR05P0-26E5-18.0 MATERIAL: 	
		SHEET NO. 1 OF 1 PART REV A		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			