


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	12MAY98	UM8-0413	DW	DW

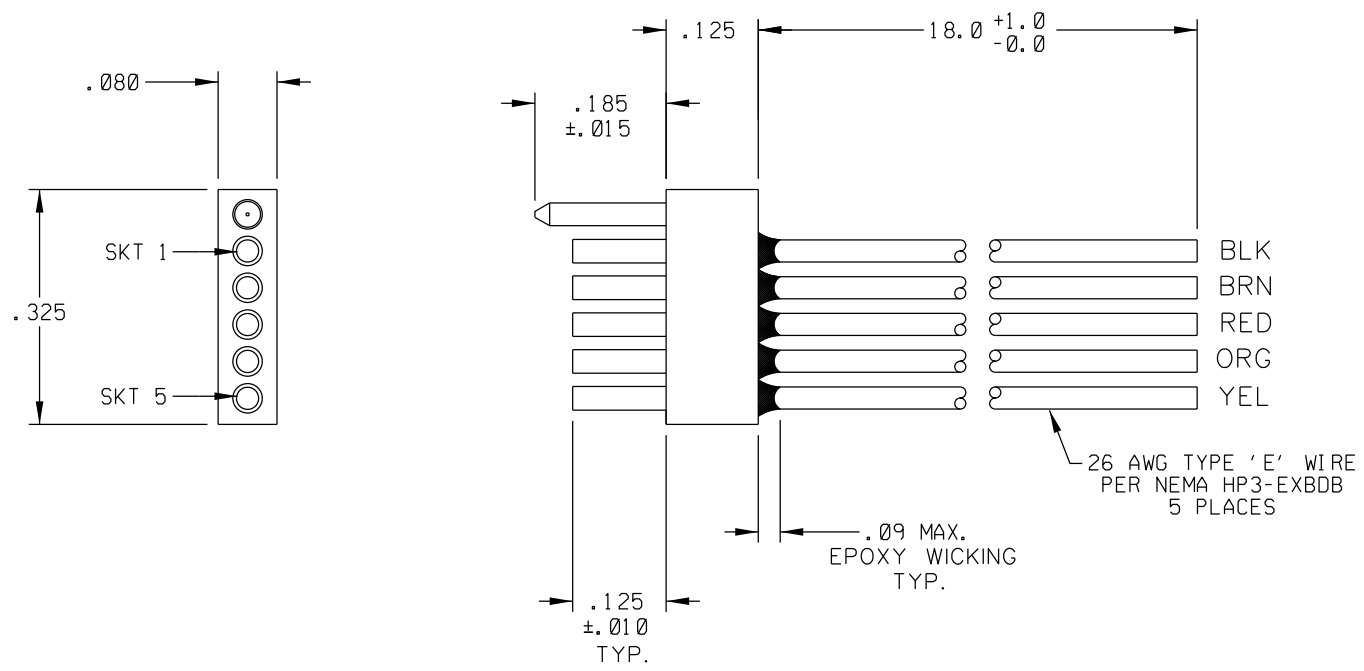

2 MATERIAL:
 BODY/INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACTS: CDA 210 COPPER ALLOY
 GUIDE PIN: STAINLESS STEEL, PASSIVATED

1. MARKING: NONE.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE 6 : 1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL	GENERAL TOLERANCES: 3 PLACE ± .005 2 PLACE ± .01 ANGULAR ± 2°	DRAWN BY & DATE D.URBACH 12MAY98		TITLE: STRIP CONNECTOR, FEMALE, 5 POSITION, W/GUIDE PIN, 26 AWG LEADS, SR05S1-26E5-18.0	
MAJOR	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	CHECKED BY & DATE SEE ECN		MATERIAL: 2	
NO SYMBOL = MINOR DIMENSION		APPROVED BY & DATE SEE ECN		Uti-Mate Connector Inc.	
	Uti-Mate CAGE CODE 58967	CAD FILENAME SD-837052041.DGN	PART NO. 837052041	DRAWING NO. SD-837052041	SHEET NO. 1 OF 1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				PART REV -