


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
NR	-	9-25-12	UMI 4729	DW	DW
-	A	8-25-14	UMI 5402	DW	DW

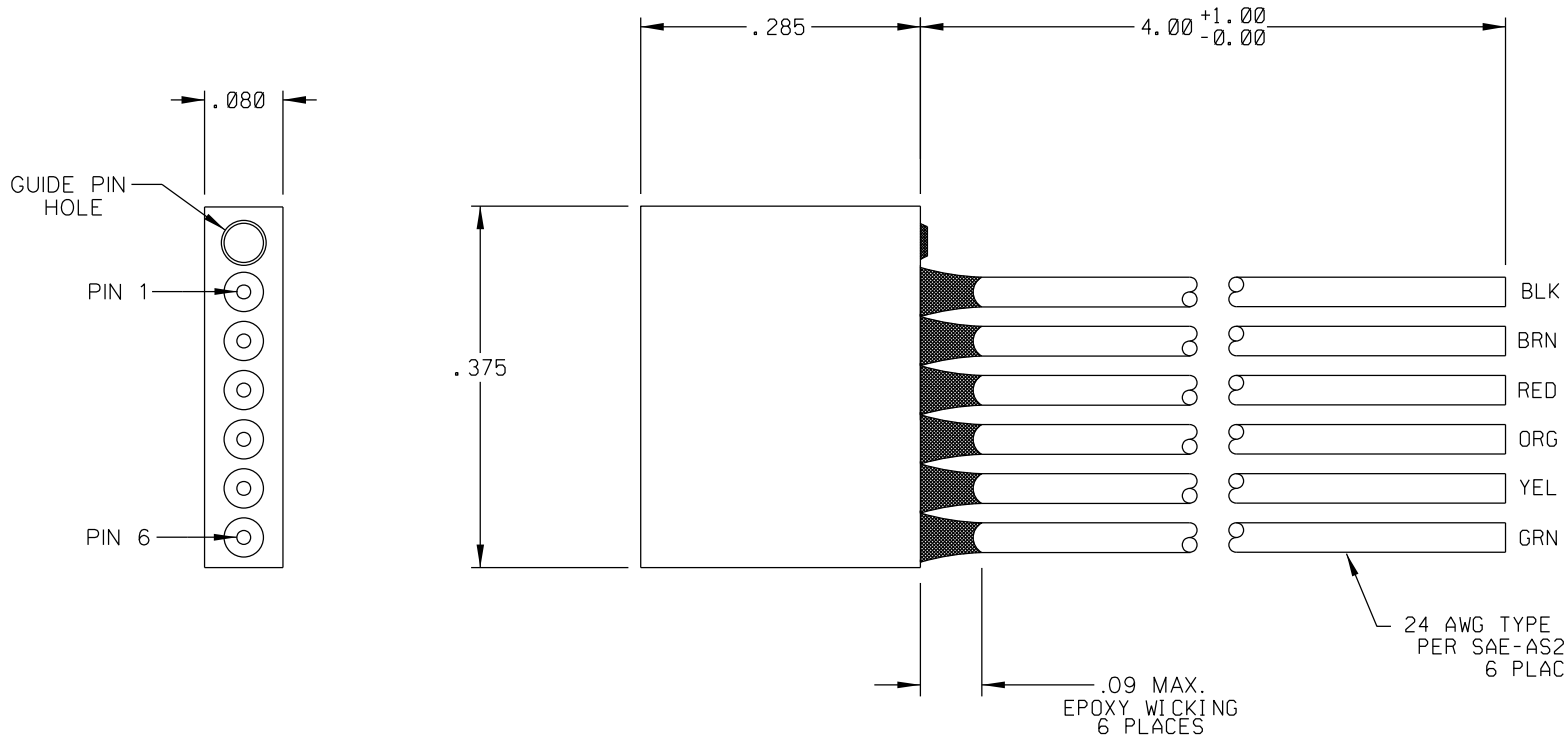

2 MATERIALS:
 INSULATOR/HOUSING: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM-B194,
 GOLD PLATED ASTM B488

1. MARKING: NONE.
 NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES/MM	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 9-25-12	CHECKED BY & DATE SEE ECN	TITLE: STRIP CONNECTOR, MALE, 6 POSITION, W/GUIDE PIN HOLE, SR06P1-24Y6-4.0	
SPECIAL	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	APPROVED BY & DATE SEE ECN	CAD FILENAME SD-837061905.DGN	MATERIAL: 2	
KEY	Ulti-Mate CAGE CODE 58967	PART NO. 837061905	DRAWING NO. SD-837061905	SHEET NO. 1 OF 1	PART REV -
KEY	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				