


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	7/19/13	UMI5041		

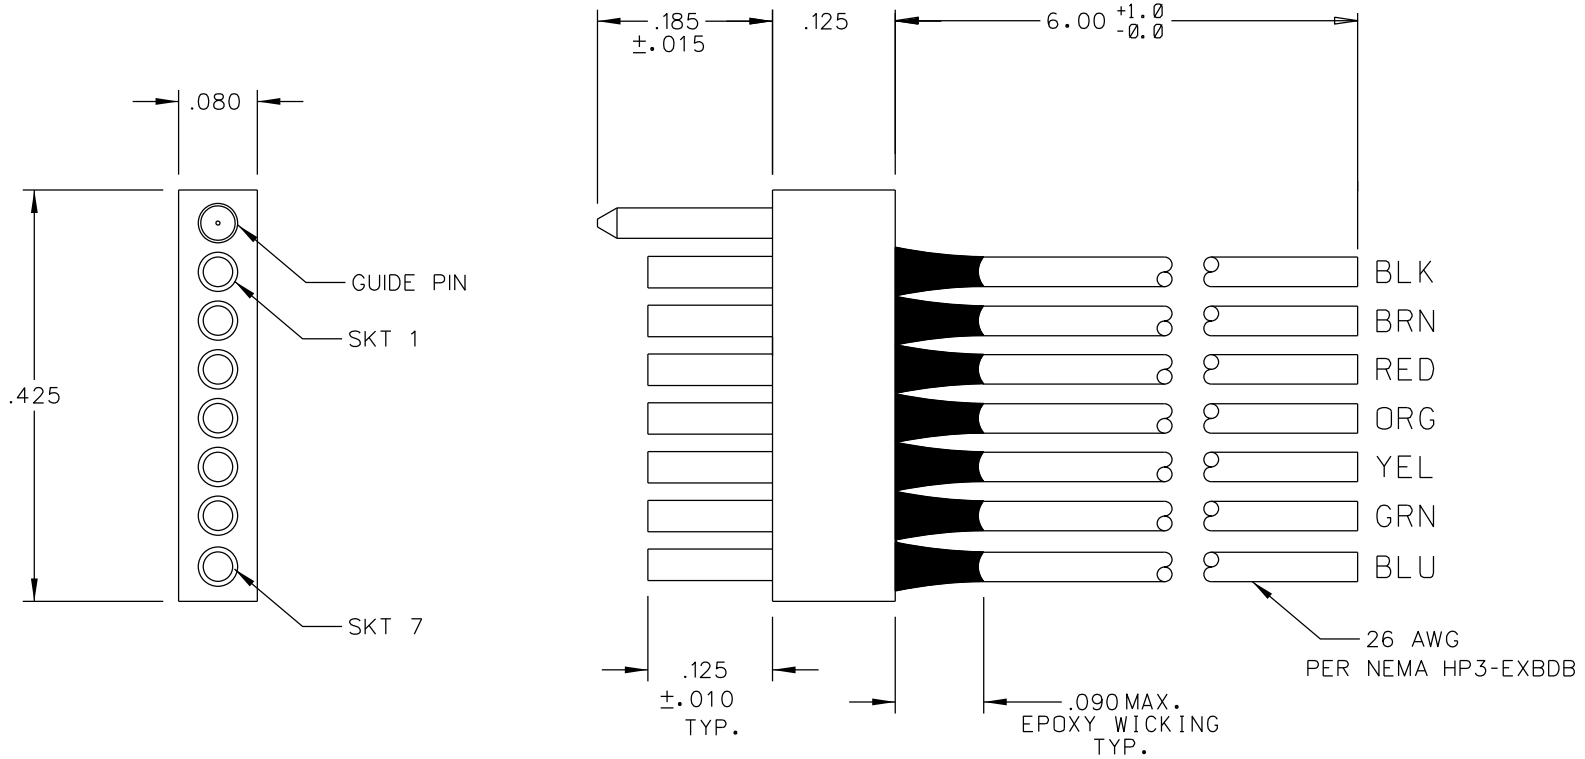

3. PERFORMANCE SPECIFICATIONS:  
 CURRENT RATING: 3 AMPS MAX.  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.  
 DWV: 600 VAC;  
 TEMPERATURE RATING: 125°C  
 CONTACT RESISTANCE: 8 MILLIOHMS MAX AT 2.5 AMPS

2. MATERIALS:  
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK  
 SOCKET CONTACTS: C21000 BRASS ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488  
 GUIDE PIN: 300 SERIES STAINLESS STEEL, PASSIVATED PER AMS 2700  
 WIRES: 26 AWG PER NEMA HP3-EXBDB

1. MARKING: UMI, DATE CODE, UMIP/N (AS SPACE PERMMITS).  
 NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY S K	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 8 : 1 DWG SIZE B	DWG ISSUE DATE 7/19/13	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE D.URBACH 7/19/13 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN	TITLE: MICRO STRIP CONNECTOR, SRO7S1-26E5-6.0	MATERIAL: 2	Ulti-Mate Connector Inc.	SHEET NO. 1 OF 1
	CAD FILENAME 837072131.DGN	PART NO. 837072131	DRAWING NO. SD-837072131	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	PART REV -	