

SD-837072900	2
APPVD BY	REL BY
ECN NO.	
UMI 4246	

3	DATE
	11-30-10

4	PART / DWG
	REV / ISSUE

5	


6	

7	

8	

9	

10	

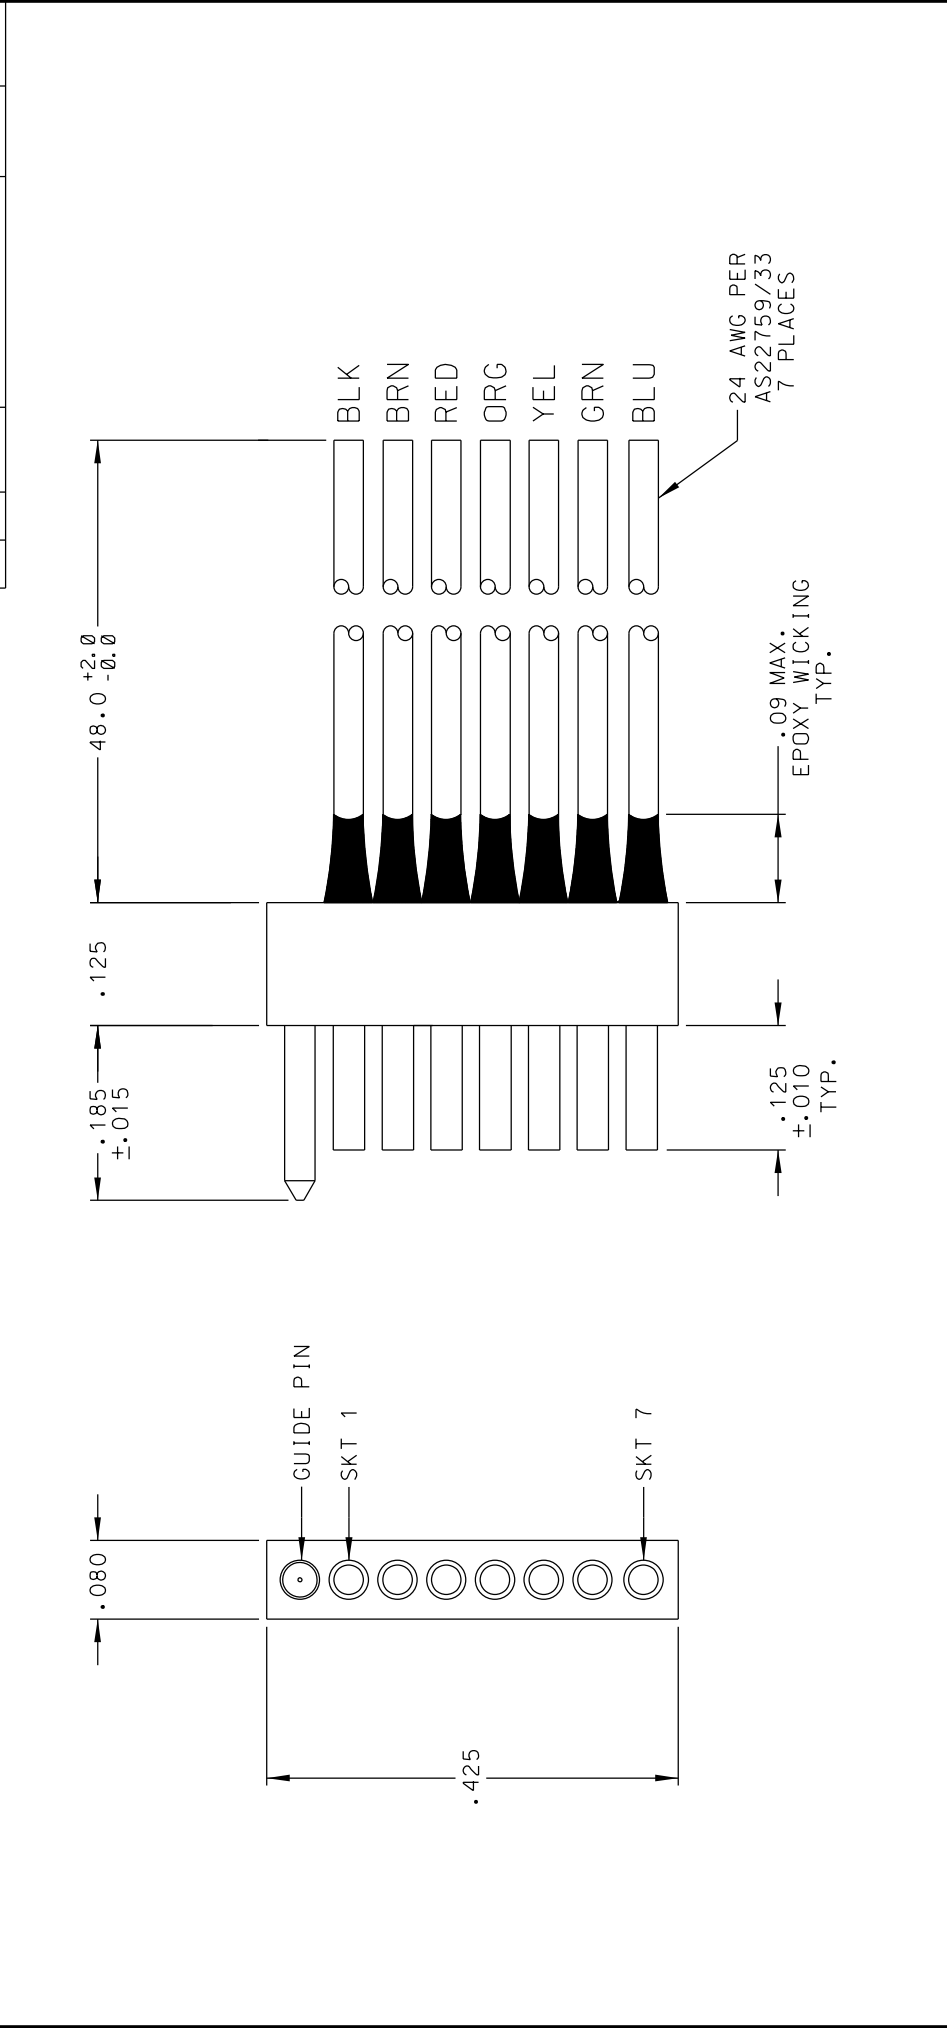

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE	DWG SIZE	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR	GENERAL TOLERANCES:	8:1	B		
MINOR	3 PLACE $\pm .005$	DRAWN BY & DATE	DW 11-30-10	TITLE:	STRIP CONNECTOR, FEMALE, 7 POSITION, W/GUIDE PIN, SR07S1-24Y6-48.0
CRITICAL	2 PLACE $\pm .01$	CHECKED BY & DATE		MATERIAL:	
ANGULAR	ANGULAR $\pm 2^\circ$	APPROVED BY & DATE			
SPC	UMI-Mate CASE CODE	CAD FILENAME	PART NO.	DRAWING NO.	SHEET NO.
	58967	SD-837072900.DGN	837072900	SD-837072900	1 OF 1
					REV

2 MATERIALS:
INSULATOR/BODY: PPS PER MIL-M-24519 GST-40F
CONTACTS: CDA210 COPPER ALLOY, GOLD PLATED PER ASTM B488
GUIDE PIN: 300 SERIES STAINLESS STEEL, PASSIVATED PER AMS 2700

1. MARKING: BAG AND TAG WITH "UMI", UMI PART NO. AND UMI DATE CODE.
NOTES: UNLESS OTHERWISE SPECIFIED.