

10

9

8

7

6

5

4

3

2

SD-837086272

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	11/5/20	UMI7596	DU	DW

F


E

D


C

B

A

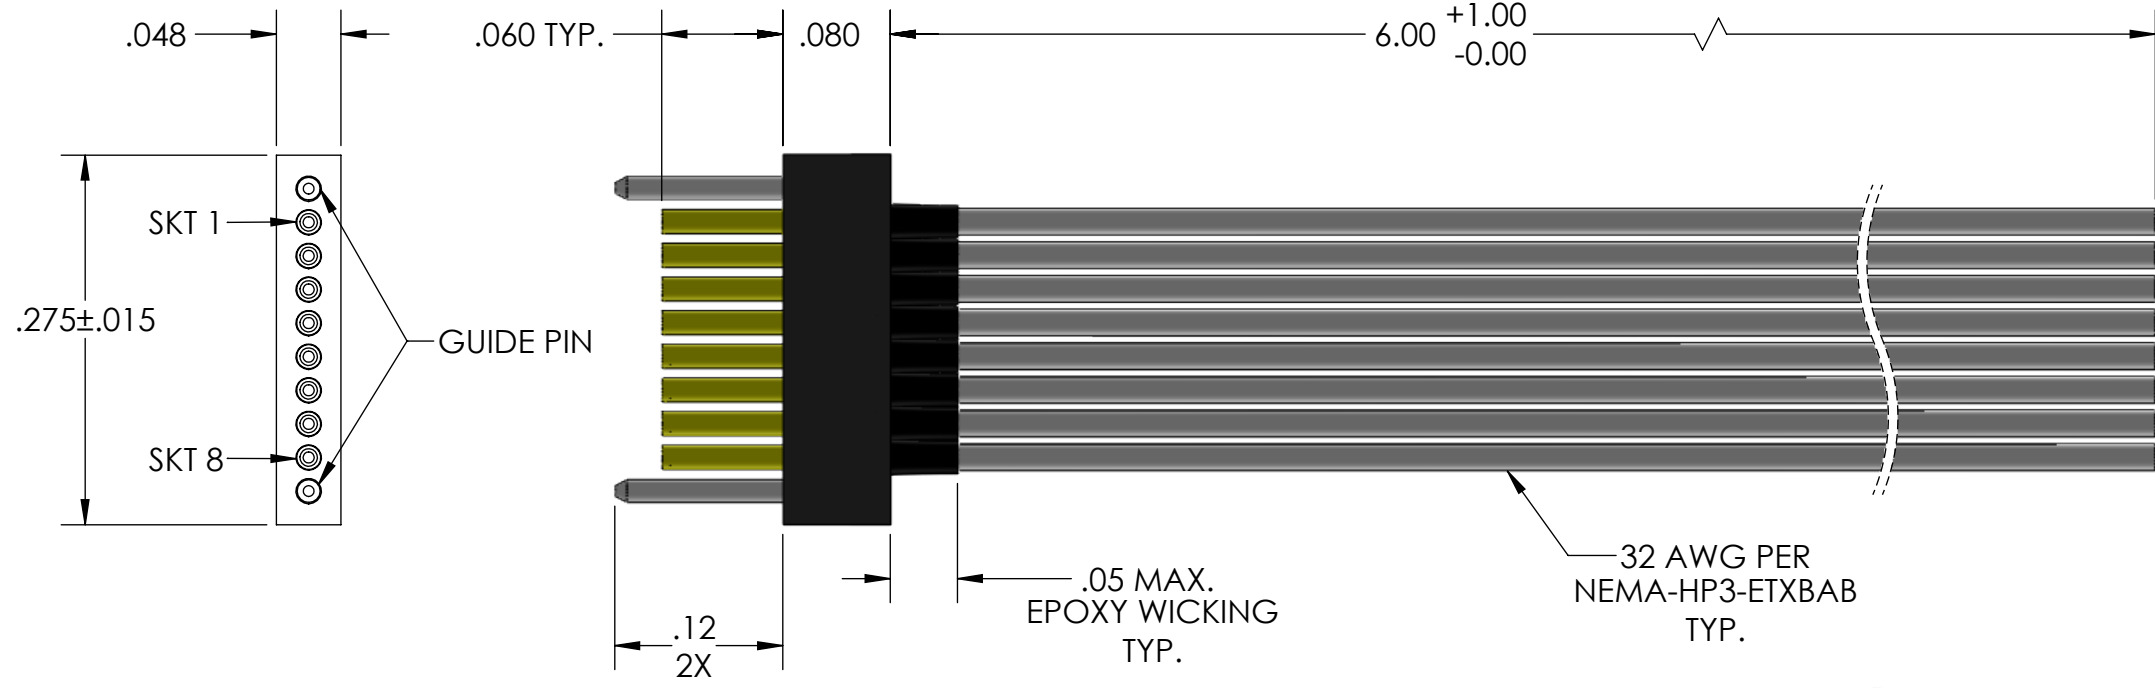

GUIDE PIN	
1	WHT
2	WHT
3	WHT
4	WHT
5	WHT
6	WHT
7	WHT
8	WHT
GUIDE PIN	

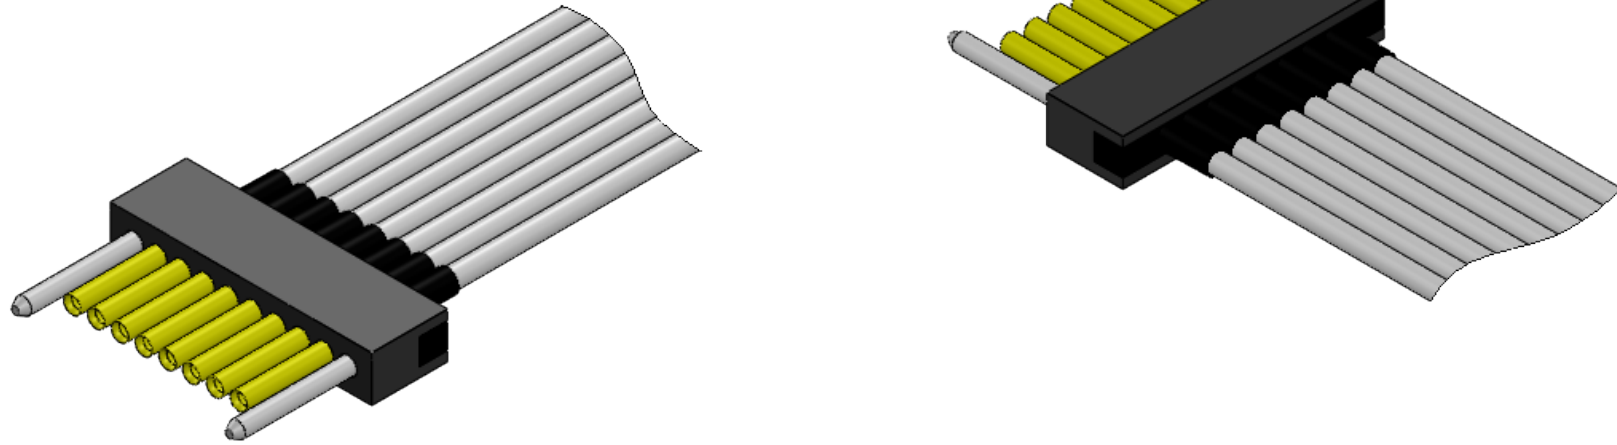

4. CONTACT HEIGHTS ARE TO BE PER QA-STD-101.

3. PERFORMANCE SPECIFICATIONS:  
 CURRENT RATING: 1 AMP MAX.  
 DWV: 250 VAC  
 TEMPERATURE RATING: -55°C TO 125°C

2 MATERIALS:  
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK  
 SOCKET CONTACTS: C21000 BRASS ALLOY PER ASTM B36, GOLD PLATED PER ASTM-B488  
 32 AWG WIRES: PER NEMA HP3-ETXBAB, COLOR CODE: ALL WHITE  
 GUIDE PIN: 300 SERIES STAINLESS STEEL, PASSIVATED

1. MARKING: BAG AND TAG WITH "UMI", DATE CODE, UMI PART NUMBER, UMI WORK ORDER NUMBER

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL C	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 11/5/20	TITLE: NANO STRIP CONNECTOR ASSEMBLY, NSR-08S2-32F1-6.0		
MAJOR	ULTI-MATE CAGE CODE 58967	CHECKED BY & DATE DW 11/5/20	MATERIAL: 2	ENG PROJECT #: NONE	UlTi-Mate Connector Inc.
NO SYMBOLS = MINOR DIMENSIONS		APPROVED BY & DATE DW 11/5/20	PART NO. 837086272	DRAWING NO. SD-837086272	SHEET NO. 1 of 1
		CAD FILE NAME SD-837086272.SLDDRW	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		
					PART REV. -