
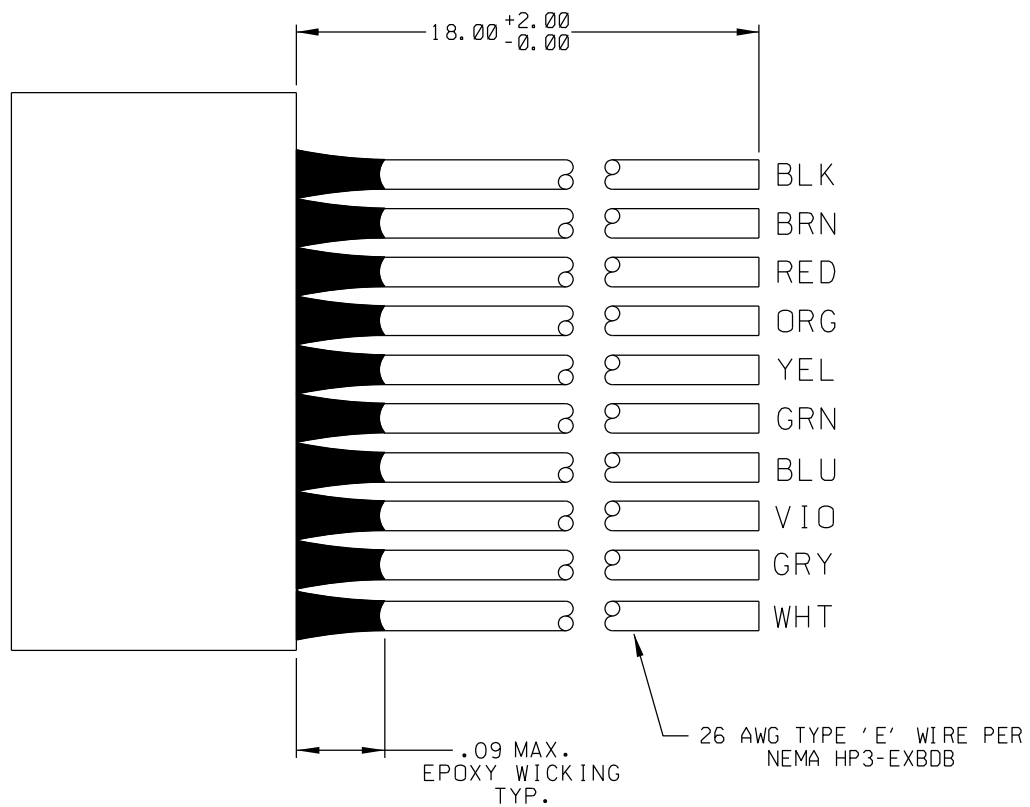


| PART REV | DWG ISSUE | DATE | ECN NO. | APPVD BY | REL BY |
|----------|-----------|--------|----------|----------|--------|
| - | - | 7-2-12 | UMI 4654 | | |

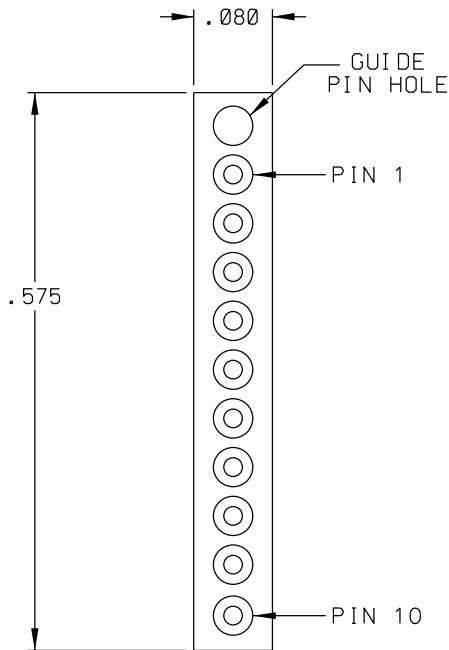

2. MATERIALS:
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488
 INSULATOR/BODY: PPS GST-40F PER MIL-M-24519, COLOR: BLACK

1. MARKING: NONE.

NOTES: UNLESS OTHERWISE SPECIFIED.

| | | | | | |
|--|--|-----------------------------------|-----------------------|---|--------------------|
| QUALITY SYMBOLS MAJOR $\blacktriangledown = 0$ CRITICAL $\triangle/C = 0$ SPC $\triangle/S = 0$ | UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES | SCALE: NONE | DWG SIZE: B | THIRD ANGLE PROJECTION | REVISE ON CAD ONLY |
| | GENERAL TOLERANCES: 3 PLACE $\pm .005$ 2 PLACE $\pm .01$ ANGULAR $\pm 2^\circ$ | DRAWN BY & DATE: DW 7-2-12 | | TITLE: STRIP CONNECTOR, SR10P1-26E5-18.0 | |
| | Uti-Mate CAGE CODE: 58967 | CHECKED BY & DATE: | | MATERIAL: $\triangle 2$ Uti-Mate Connector Inc. | |
| | | CAD FILENAME: SD-8371 01 041 .DGN | PART NO.: 8371 01 041 | DRAWING NO.: SD-8371 01 041 | SHEET NO.: 1 OF 1 |
| | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. | | | | REV: - |