
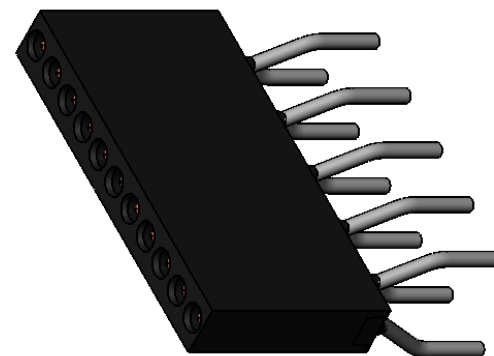
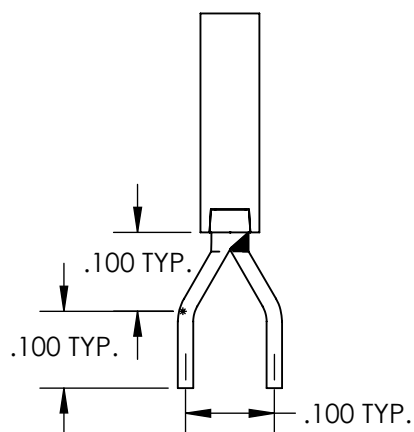
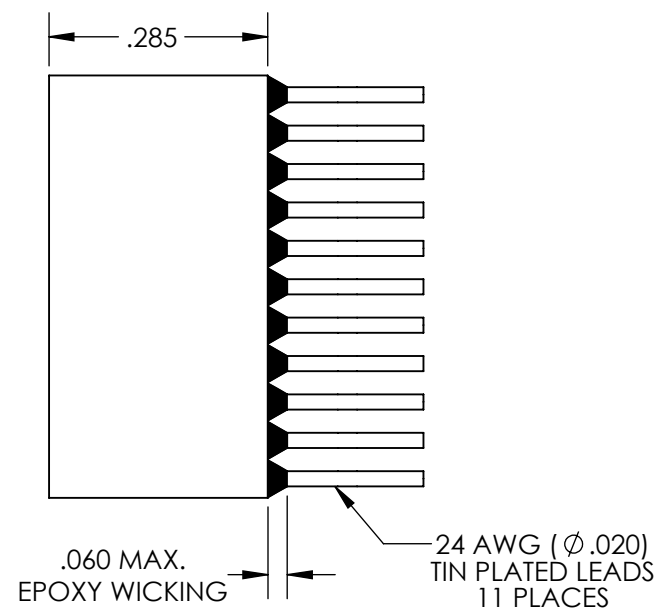


REVISIONS

DWG. ISSUE	PART REV.	ECN NO.	DATE
-	-	UMI4811	11/27/2012

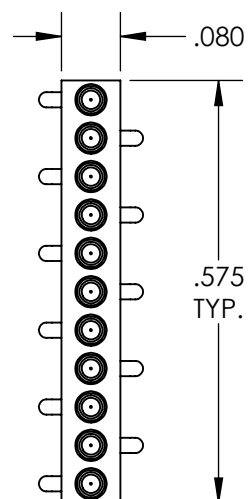

3. PERFORMANCE SPECIFICATIONS:

CURRENT RATING: 3A MAX.
INSULATION RESISTANCE: 5000 MΩ MIN.
DWV: 600 VAC

TEMPERATURE RATING: 125°C

CONTACT RESISTANCE: 8 mΩ MAX AT 2.5 AMPS

MATERIALS:






BODY: PPS PER MIL-M-24519 GST-40F, COLOR: BLK

PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194,
GOLD PLATED PER ASTM B488

24 AWG LEADS: TIN PLATED COPPER ALLOY PER A-A-59551 TYPE S

1. MARKINGS: UMI, UMI PART NO., AND DATE CODE

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS MAJOR  = CRITICAL  = SPC  =	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE 2:1	DWG SIZE A	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE J.BUZOIANU 11/27/2012	TITLE STRIP CONNECTOR, MALE 11 POSITION, L04 LEADS SR11P0-L04			
	Uti-Mate CAGE CODE 58967	CHECKED BY & DATE	MATERIAL	DRAWING NO. SD-837111220		
		CAD FILENAME SD-837111220.sldrw	PART NO. 837111220		PART REV. -	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.