
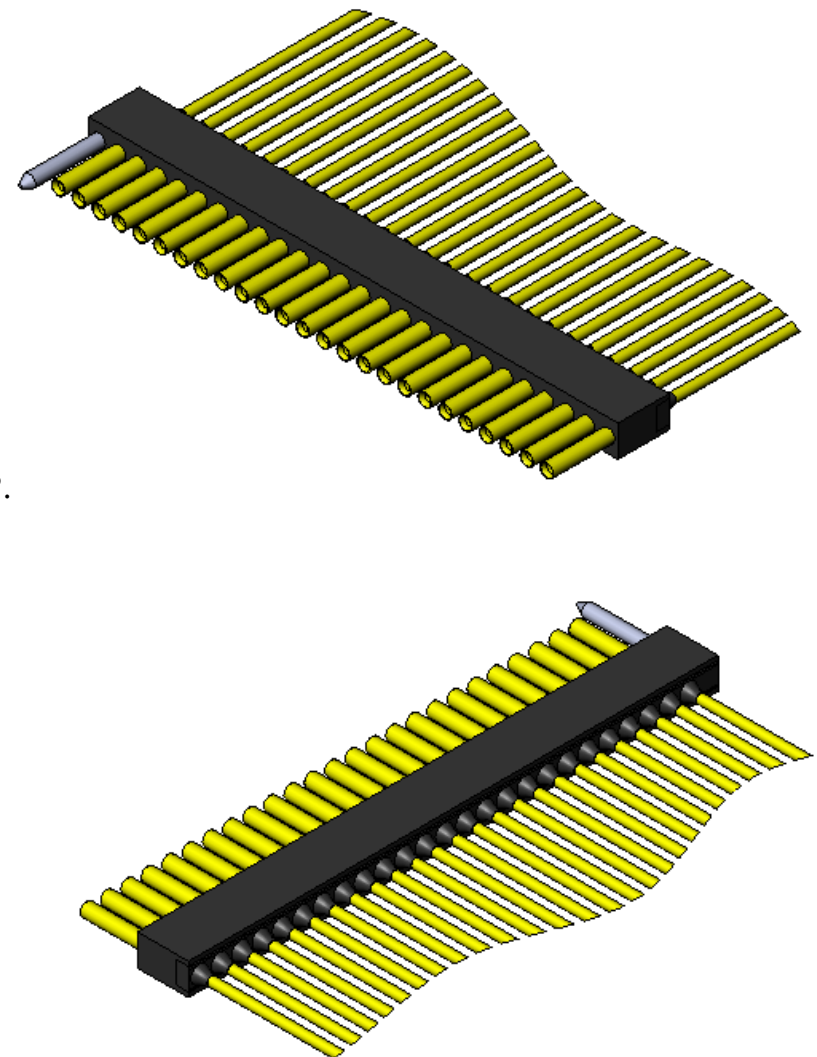


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	6/4/14	UMI5334	DW	DW

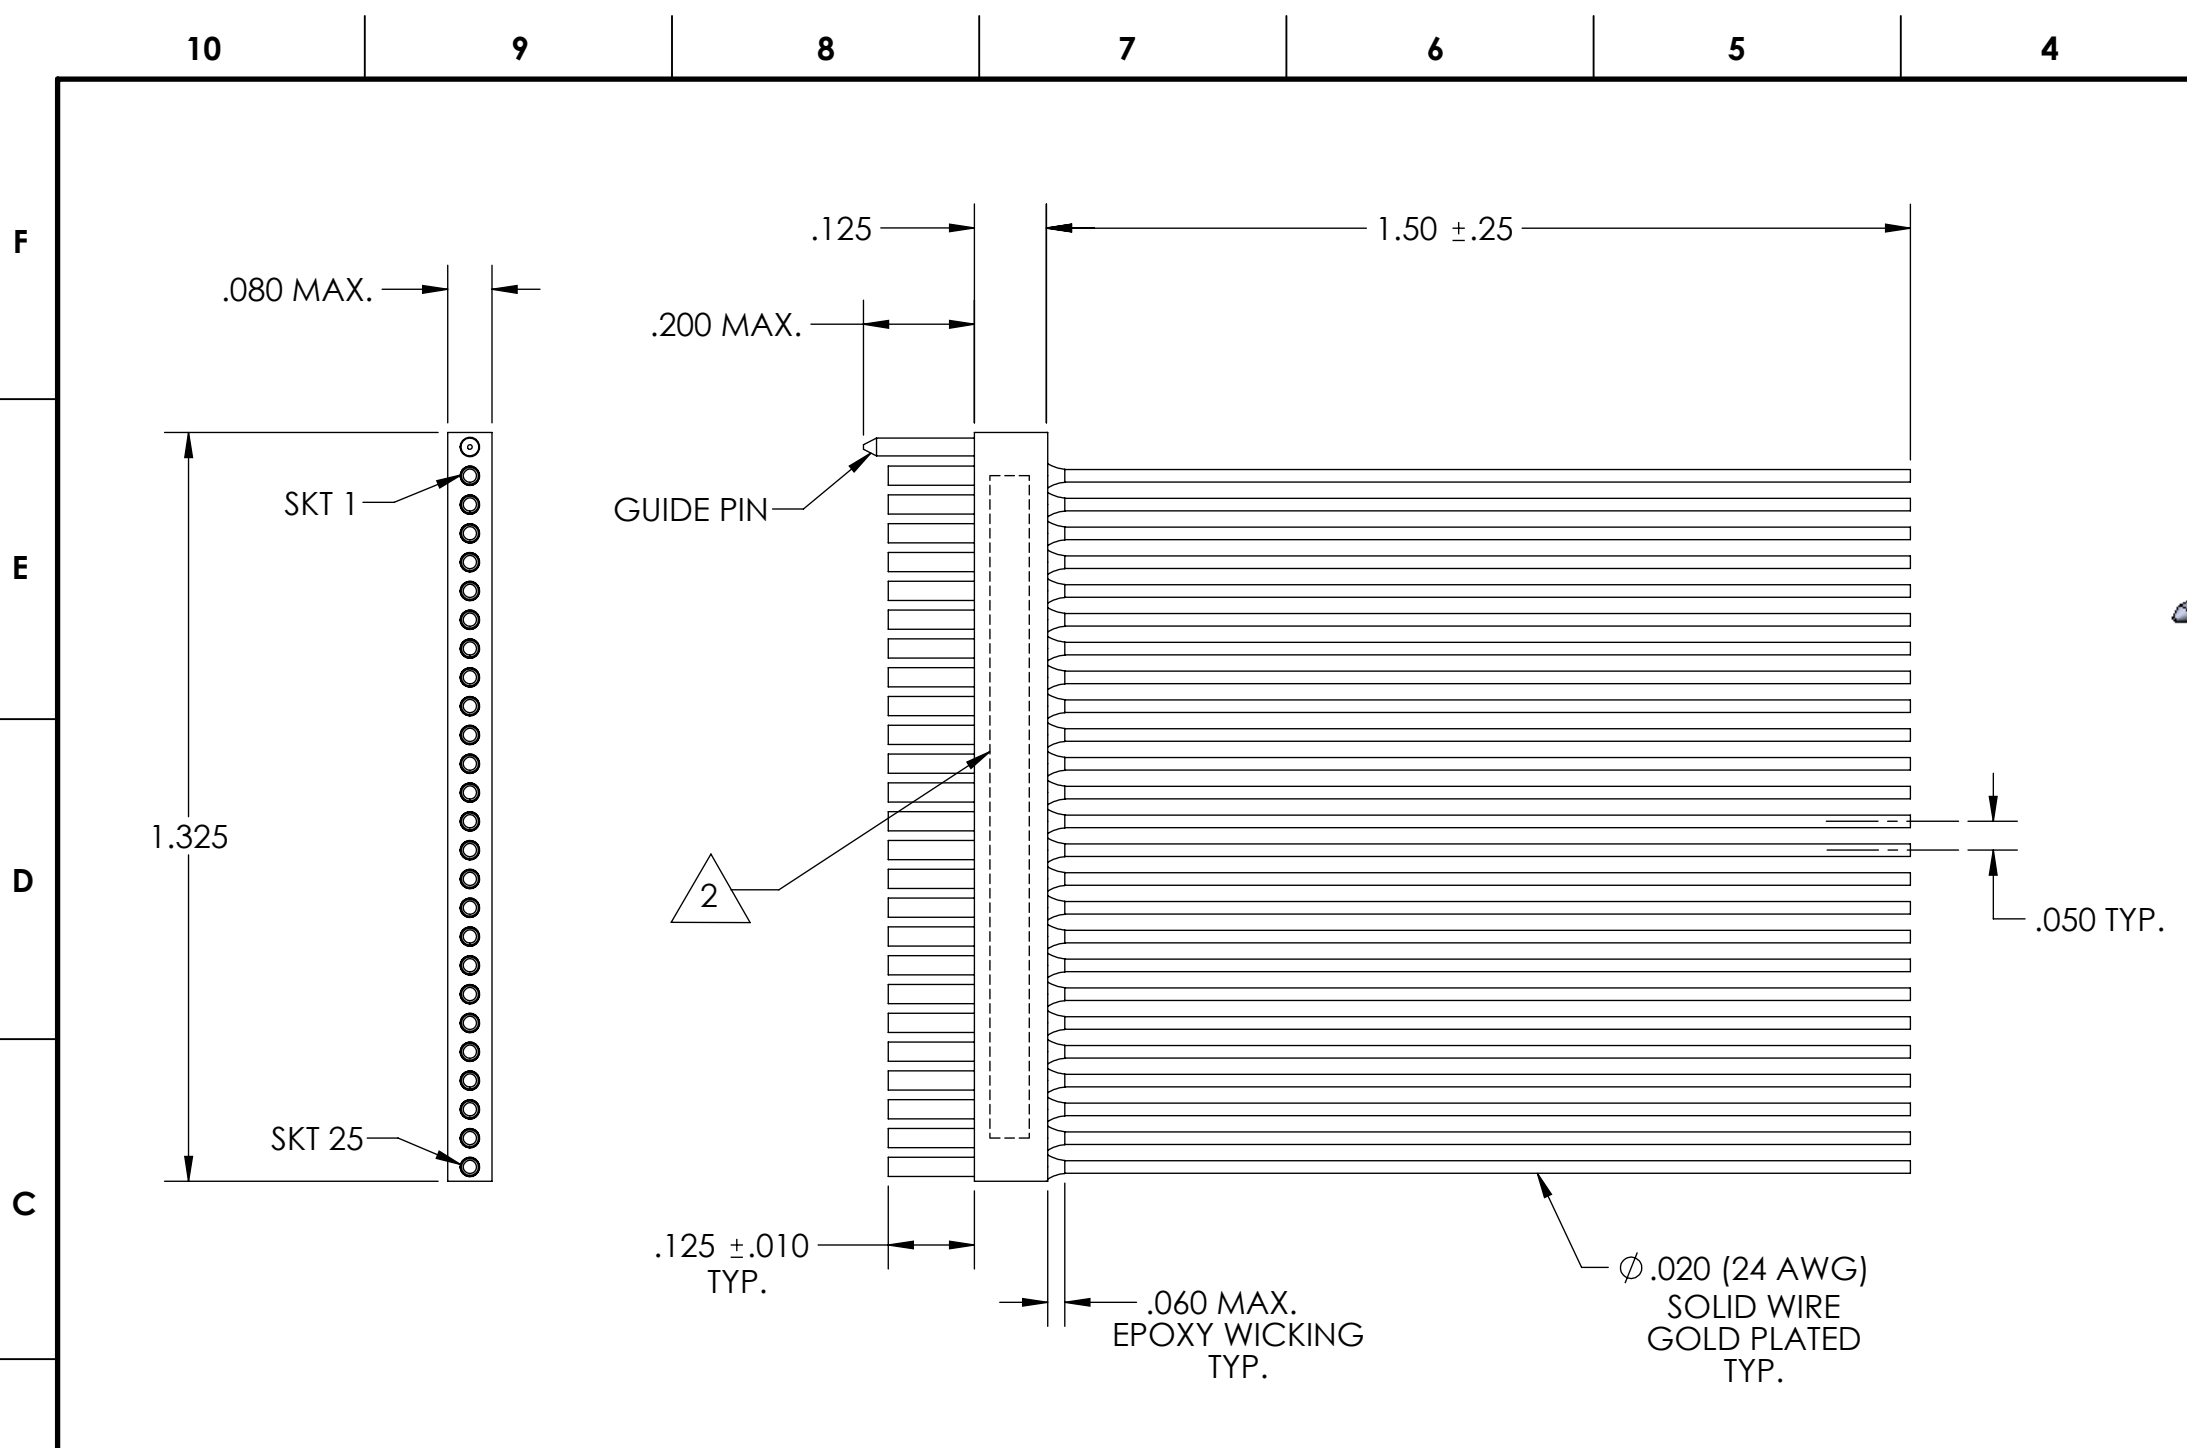

4. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3 AMPS MAX.
 DWV: 600 VAC
 TEMPERATURE RATING: 125° C

3 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36,
 GOLD PLATED PER ASTM B488
 24 AWG LEADS: GOLD PLATED COPPER ALLOY
 GUIDE PIN: PASSIVATED STAINLESS STEEL

2 MARKING: "UMI", DATE CODE UMI PART NUMBER.

1. CONNECTOR ASSEMBLY IS IAW MIL-DTL-83513 UNLESS OTHERWISE SPECIFIED.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	SCALE 3 : 1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE DU 6/4/14		TITLE: MICRO STRIP CONNECTOR, "SR" SERIES, SR25S1-24C4-1.50, GOLD PLATED LEADS		
		CHECKED BY & DATE DW 6/4/14		MATERIAL: 3	ENG PROJECT #: NONE	
		APPROVED BY & DATE DW 6/4/14			DRAWING NO. SD-837252431	
	ULTI-MATE CAGE CODE 58967		CAD FILE NAME SD-837252431.SLDDRW	PART NO. 837252431	SHEET NO. 1 of 1	PART REV. -
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						

