

10

9

8

7

6

5

4

3



2

SD-838332240

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	02/5/2019	UMI 7028	VL	DW

**COLOR CODE**

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	W/BLK
12	W/BRN
13	W/RED
14	W/ORG
15	W/YEL
16	W/GRN
17	W/BLU
18	W/VIO
19	W/GRY
20	W/BLK/BRN
21	W/BLK/RED
22	W/BLK/ORG
23	W/BLK/YEL
24	W/BLK/GRN
25	W/BLK/BLU
26	W/BLK/VIO

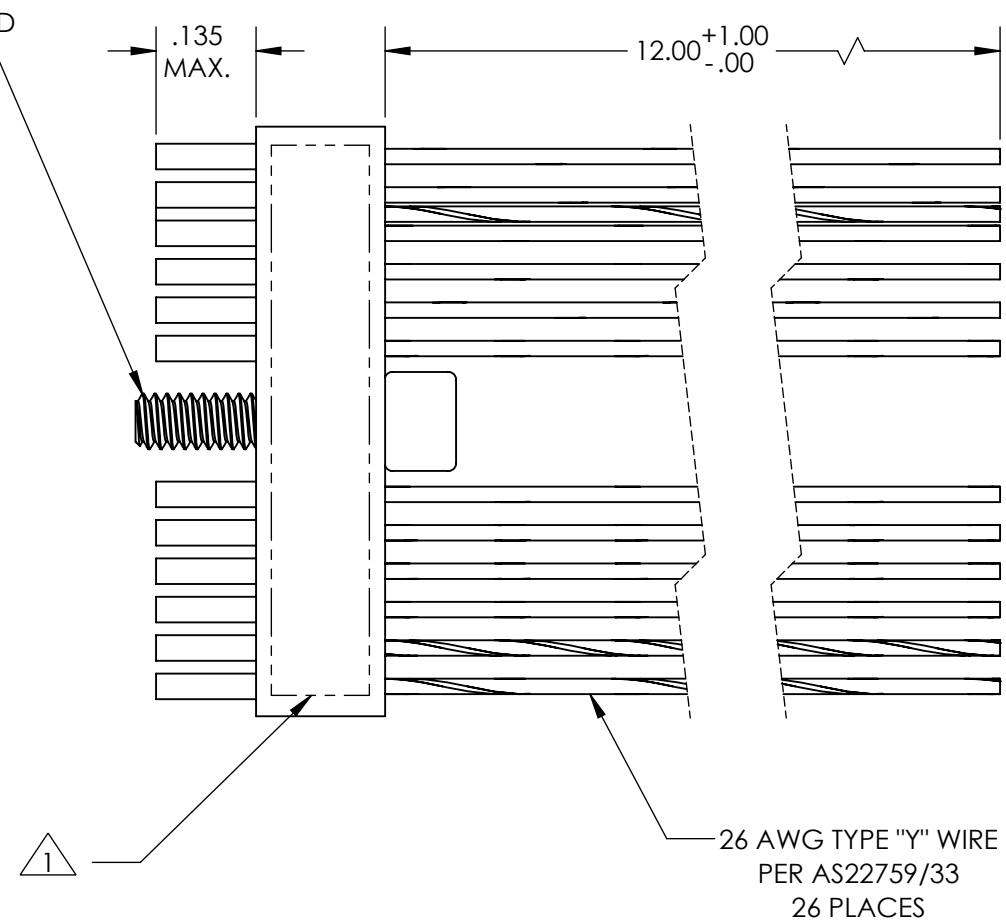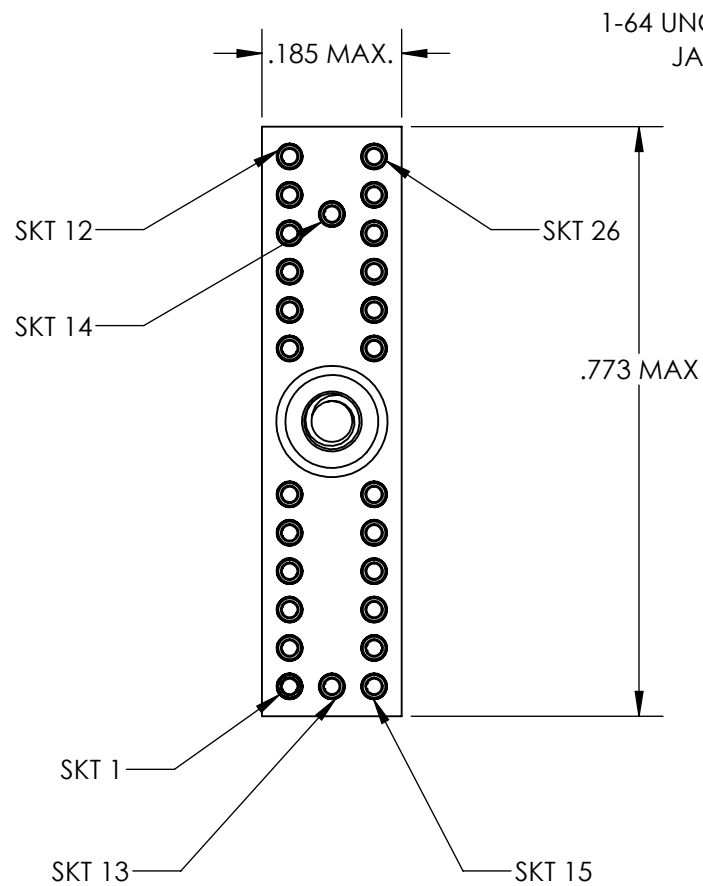

3. PERFORMANCE SPECIFICATIONS:  
 CURRENT RATING: 3 AMPS MAX  
 DWV: 600 VAC  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN  
 TEMPERATURE RATNG: -55° C TO 125° C

2. MATERIALS:  
 INSULATOR: PPS PER MI L-M-24519 GST 40F, COLOR: BLACK  
 HARDWARE: PASIVATED STAINLESS STEEL  
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488

1. MARKING: "UMI", UMI DATE CODE, UMI PART NUMBER, AND WORK ORDER NUMBER.

QUALITY SYMBOLS CRITICAL  MAJOR  NO SYMBOLS = MINOR DIMENSIONS	UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE IN INCHES	SCALE XX:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	GENERAL TOLERANCES: 3 PLACES ±.005 2 PLACES ±.01 ANGULAR ±2°	DRAWN BY & DATE VL 02/5/2019	TITLE: <b>CONNECTOR ASSEMBLY JSBR-26S-26Y5-12.0S</b>			
	ULTI-MATE CAGE CODE <b>58967</b>	CHECKED BY & DATE SEE ECN	MATERIAL: 2	ENG PROJECT #: NONE	 <b>Ulti-Mate</b> Connector Inc.	
		APPROVED BY & DATE SEE ECN	PART NO. 838332240	DRAWING NO. SD-838332240	SHEET NO. 1 of 1	
		CAD FILE NAME SD-838332240.SLDDRW	PART REV. -			

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.