
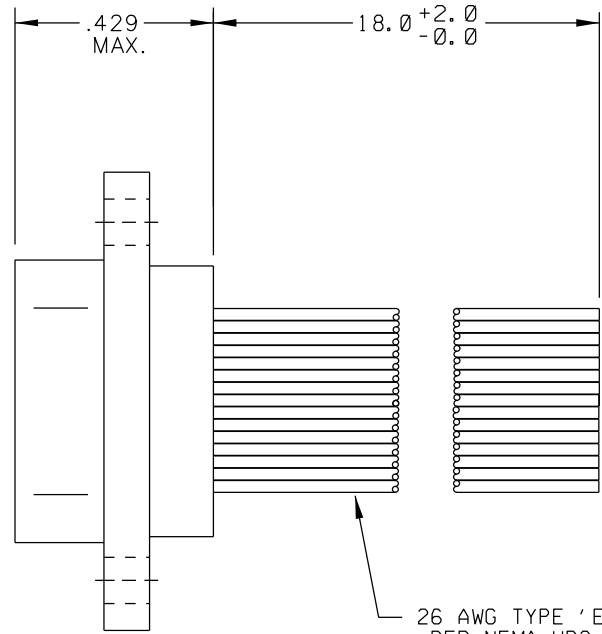


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	10-28-11	UMI 4497	DW	DW

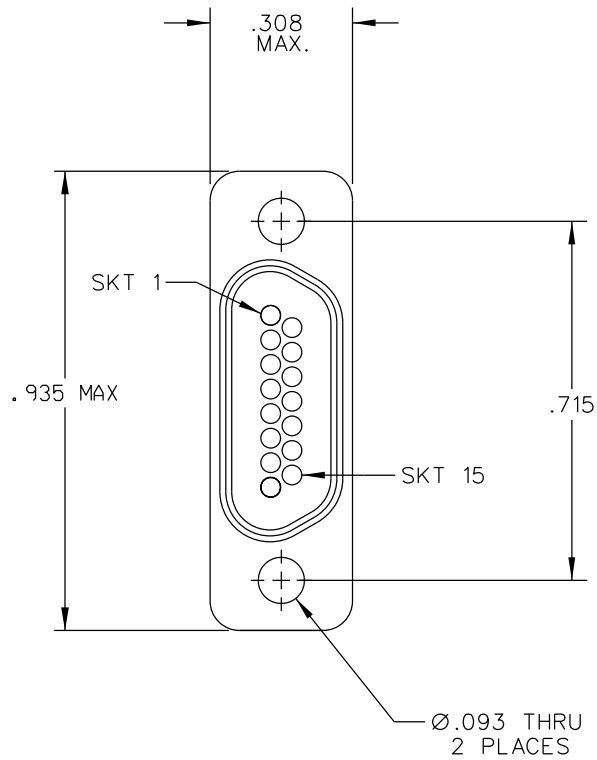

26 AWG TYPE 'E' WIRE
PER NEMA HP3-EXBDB
15 PLACES

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	WHT/BLK
12	WHT/BRN
13	WHT/RED
14	WHT/ORG
15	WHT/YEL

3. TEMPERATURE RATING: 200°C.

2. MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER AMS QQ-A-200/8, NICKEL PLATED PER AMS 2404
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACTS: CDA 210 BRASS PER ASTM B36, GOLD PLATED PER ASTM B488

1. MARKING: UMI, DATE CODE, UMIP/N.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY S K	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.002 2 PLACE ±.005 ANGULAR ±2°	SCALE 4 : 1 DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE DW 10-28-11 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN	CAD FILENAME SD-839040043.DGN	TITLE: MICRO-D RECEPT., SIZE 15, 26 AWG TYPE 'E' WIRE, HIGH TEMP. (200°C), MR15S0-26E5-18.0-S01-HT MATERIAL: 2	Uti-Mate Connector Inc.
	PART NO. 839040043	DRAWING NO. SD-839040043	SHEET NO. 1 OF 1	PART REV -	
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				