
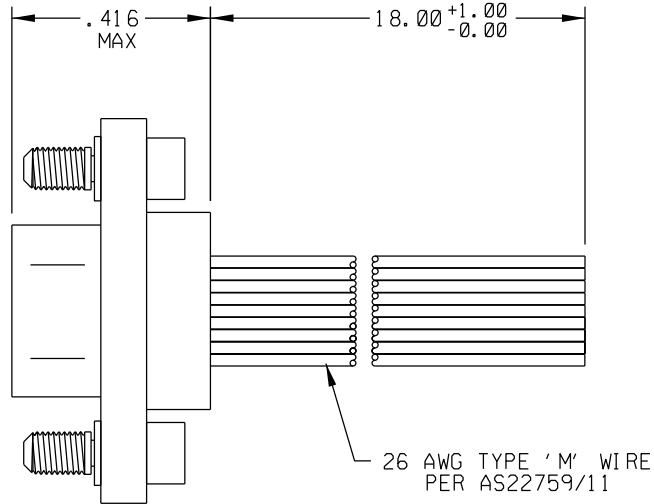


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	12-5-11	UMI 4520	DW	DW

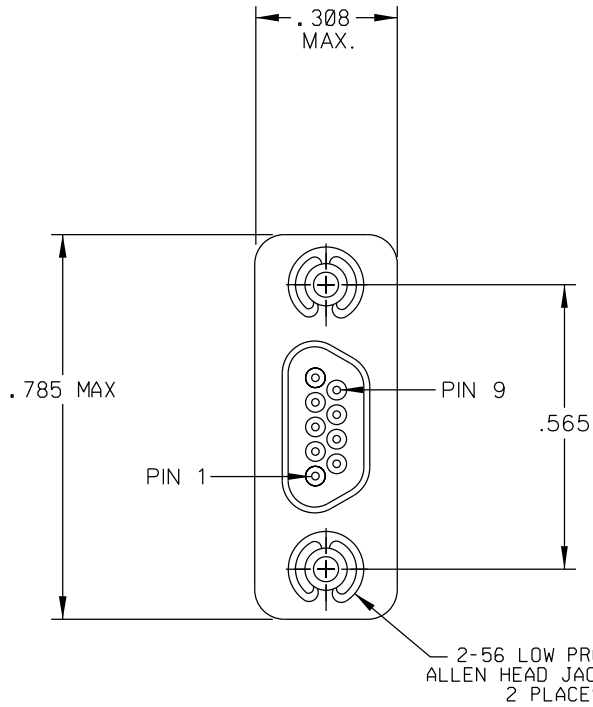

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY

2 MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER SAE-AMS-QQ-A200/8 OR A200/11,
 CADMIUM PLATED PER SAE-AMS-QQ-P-416
 INSULATOR: PPS PER MIL-M-24519 GST-40F; COLOR: BLACK
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194,
 GOLD PLATED PER ASTM B488
 HARDWARE: PASSIVATED STAINLESS STEEL IAW MIL-DTL-83513/5
 1. MARKING: UMI, DATE CODE, UMI P/N, AND WORK ORDER NUMBER.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	DRAWN BY & DATE DW 12-5-11	TITLE: MICRO-D PLUG, 9 PIN, 26 AWG TYPE 'M' WIRE LEADS, MR09P02-26M5-18.0			
	Ulti-Mate CAGE CODE 58967	CHECKED BY & DATE SEE ECN	APPROVED BY & DATE SEE ECN	MATERIAL:	Uti-Mate Connector Inc.	SHEET NO. 1 OF 1
		CAD FILENAME SD-834110182.DGN	PART NO. 834110182	DRAWING NO. SD-834110182	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	PART REV -