


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	5-4-08	UMI 3660	DW	DW

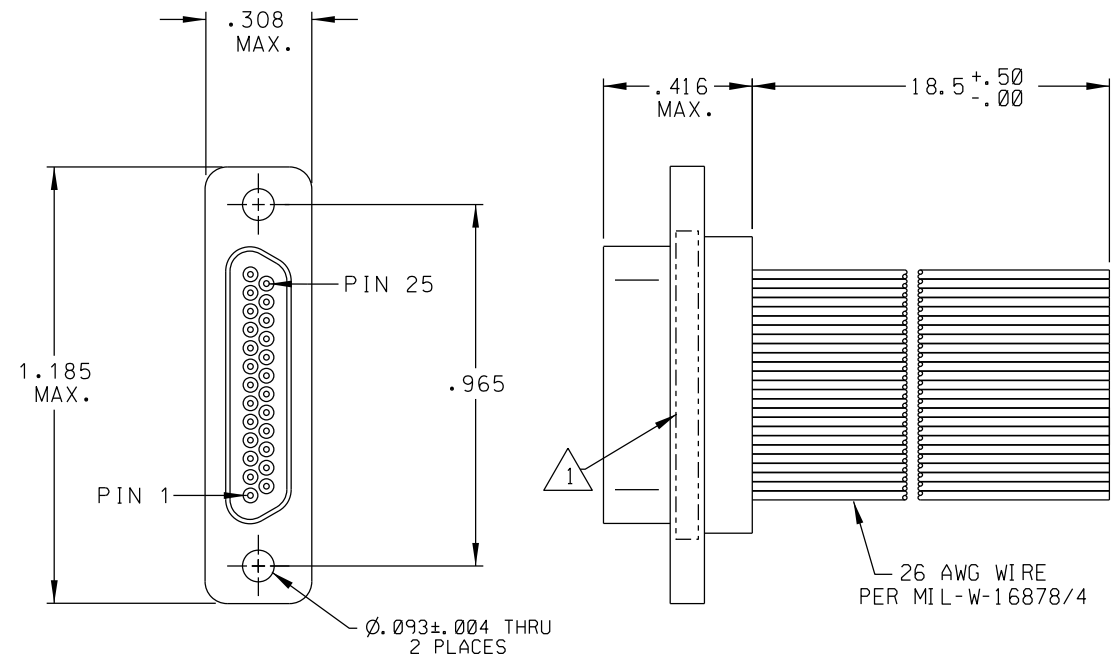

- 1 BLK
- 2 BRN
- 3 RED
- 4 ORG
- 5 YEL
- 6 GRN
- 7 BLU
- 8 VIO
- 9 GRY
- 10 WHT
- 11 W/BLK
- 12 W/BRN
- 13 W/RED
- 14 W/ORG
- 15 W/YEL
- 16 W/GRN
- 17 W/BLU
- 18 W/VIO
- 19 W/GRY
- 20 W/BLK/BRN
- 21 W/BLK/RED
- 22 W/BLK/ORG
- 23 W/BLK/YEL
- 24 W/BLK/GRN
- 25 W/BLK/BLU

2 MATERIALS:
 SHELL: NICKEL PLATED 6061-T6 ALUMINUM
 INSULATOR: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: GOLD PLATED BERYLLIUM COPPER
1 MARKING: UMI, DATE CODE, UMI P/N, AND WORK ORDER NUMBER.
 NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL SPECIAL KEY	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ± .005 2 PLACE ± .01 ANGULAR ± 2°	SCALE: NONE DWG SIZE: B THIRDS ANGLE PROJECTION	REVISE ON CAD ONLY TITLE: MICRO-D PLUG, 21 PIN, 26 AWG TYPE 'E' WIRE LEADS, MR25P0-26E5-18.0-S01	
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	DRAWN BY & DATE: DW 5-14-08 CHECKED BY & DATE: SEE ECN APPROVED BY & DATE: SEE ECN	MATERIAL: 2 Ulti-Mate Connector Inc.	PART NO.: 8341 41 070 DRAWING NO.: SD-8341 41 070 SHEET NO.: 1 OF 1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	PART REV: -		