


SD-8341 60005

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	6-1-10	UMI 4097	DW	DW

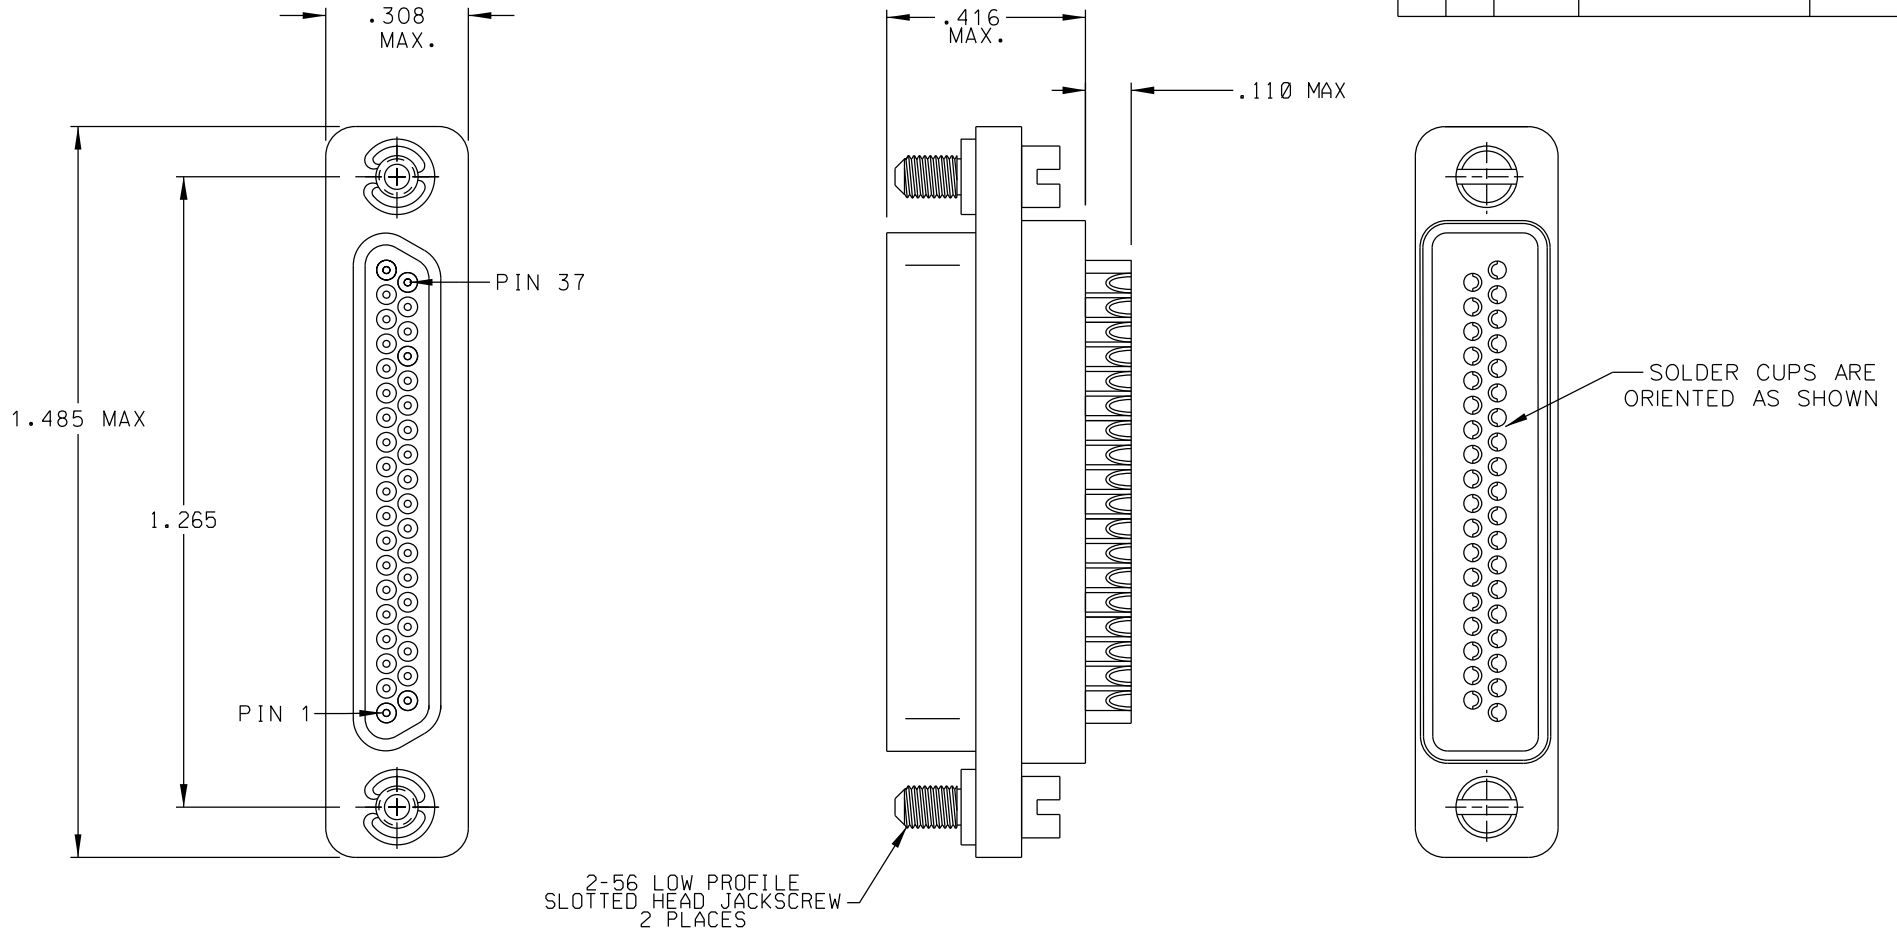

2-56 LOW PROFILE
SLOTTED HEAD JACKSCREW
2 PLACES

- 2 MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8, CADMIUM PLATED PER AMS-QQ-P-416
 INSULATOR: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM-B194,
 GOLD PLATED PER ASTM B488
 HARDWARE: STAINLESS STEEL, PASSIVATED PER AMS 2700

1. MARKING: UMI, DATE CODE, UMI P/N.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL ▽	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 6-1-10	CHECKED BY & DATE SEE ECN	TITLE: MICRO-D CONNECTOR, 37 POSITION, SOLDER CUP CONTACTS, SLOTTED JACKSCREWS, MR37N05	
SPL/MINOR Ⓢ	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	APPROVED BY & DATE SEE ECN		MATERIAL: 2	Uti-Mate Connector Inc.
SPL/MAJOR ▽		CAD FILENAME SD-834160005.DGN	PART NO. 834160005	DRAWING NO. SD-834160005	SHEET NO. 1 OF 1
KEY ◇	Uti-Mate CAGE CODE 58967	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			PART REV -