


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	7-7-15	UMI 5666	DW	DW

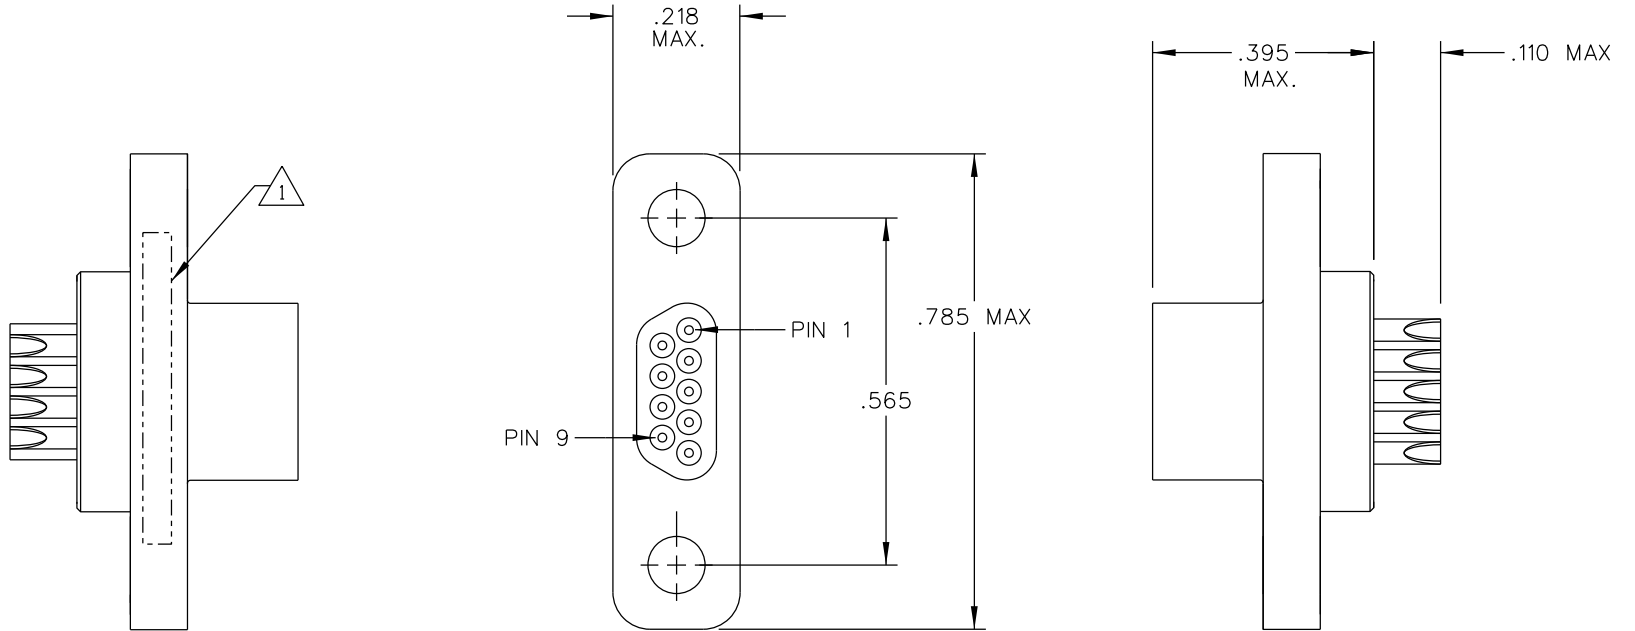

3. PERFORMANCE SPECIFICATIONS:  
 CURRENT RATING: SIGNAL CONTACTS: 3 AMPS MAX  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.  
 DWV: 600 VAC;  
 TEMPERATURE RATING: 125° C

2. MATERIALS:  
 SHELL: NICKEL PLATED 6061-T6 ALUMINUM  
 INSULATOR: PPS PER MIL-M-24519 GST-40F  
 PIN CONTACTS: GOLD PLATED BERYLLIUM COPPER

1. MARKING: UMI, DATE CODE, UMIP/N.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 11-13-07	CHECKED BY & DATE SEE ECN	TITLE: MICRO-D CONNECTOR ASSEMBLY, SIZE 9 PLUG, LOW PROFILE, APR09N0-S01	
SPECIAL	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	APPROVED BY & DATE SEE ECN	CAD FILENAME SD-834311000.DGN	MATERIAL: 2	Uti-Mate Connector Inc.
KEY	Uti-Mate CAGE CODE 58967	PART NO. 834311000	DRAWING NO. SD-834311000	SHEET NO. 1 OF 1	PART REV -
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			