


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	5-9-16	UMI 5969	DW	DW

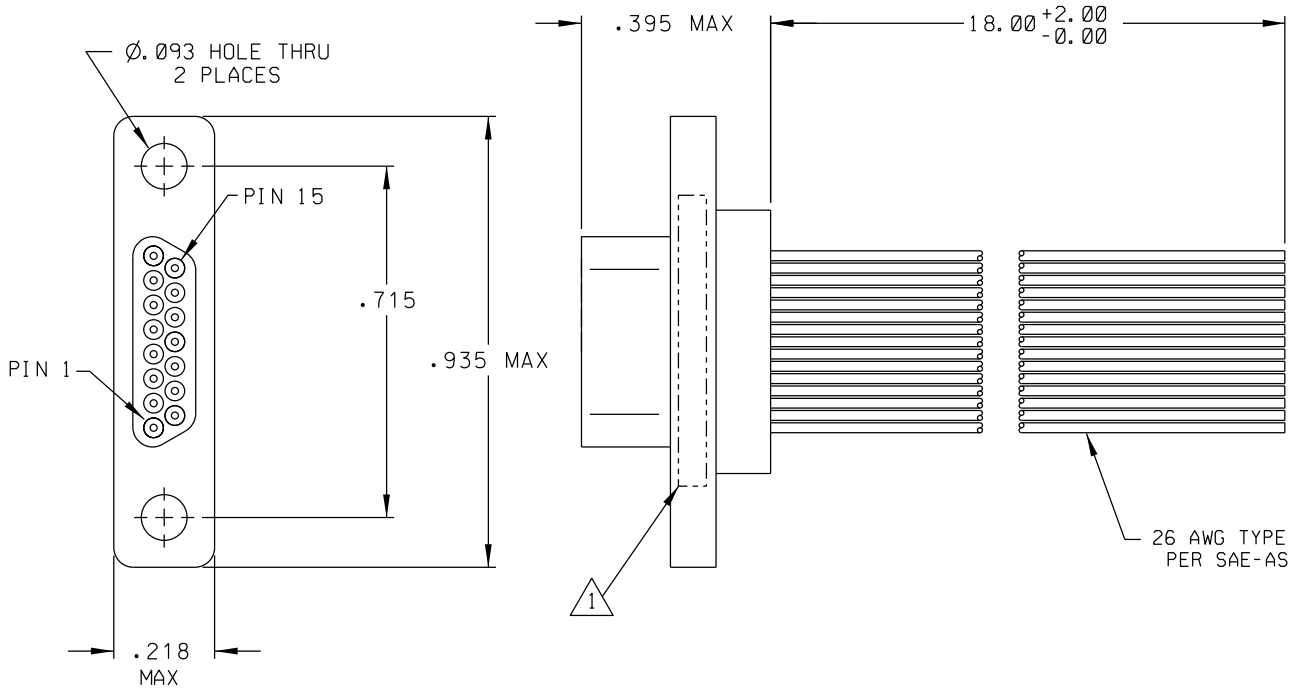

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY
10	WHT
11	W/BLK
12	W/BRN
13	W/RED
14	W/ORG
15	W/YEL

26 AWG TYPE 'M' WIRE  
PER SAE-AS22759/11

3. PERFORMANCE SPECIFICATIONS:  
CURRENT RATING: 3A MAX  
DWV: 600 VAC  
INSULATION RESISTANCE: 5000 MEGOHMS MIN.  
TEMPERATURE RATING: 125° C

2 MATERIALS:  
SHELL/INSULATOR: PPS PER MIL-M-24519 GST-40F  
PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194,  
GOLD PLATED PER ASTM B488

1 MARKING: UMI, DATE CODE, UMI P/N, AND WORK ORDER NUMBER.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS CRITICAL 1 SPECIAL S KEY K 0	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	SCALE 2 : 1 DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE <b>58967</b>	DRAWN BY & DATE DW 7-11-07 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN	TITLE: CONNECTOR ASSEMBLY, PR15PO-26M5-18.0		MATERIAL: 2 <b>Ulti-Mate</b> Connector Inc.	
	Ulti-Mate CAGE CODE <b>58967</b>	CAD FILENAME SD-834528180.DGN	PART NO. 834528180	DRAWING NO. SD-834528180	SHEET NO. 1 OF 1	PART REV -
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					