
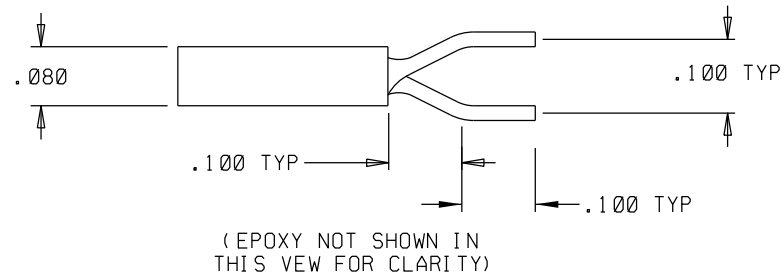
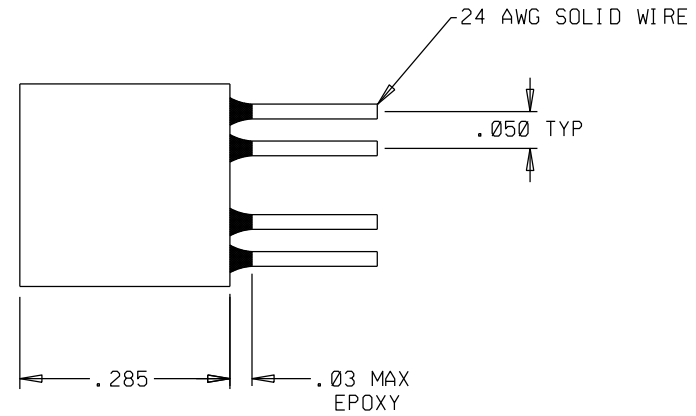


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	9-19-18	UMI6879	DW	DW

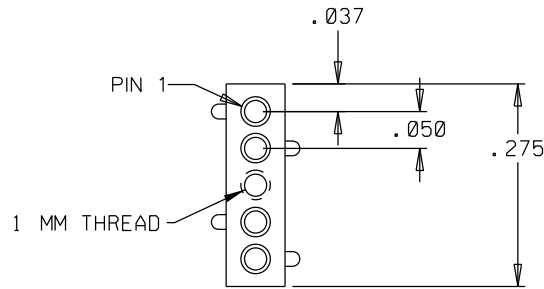

3. PERFORMANCE SPECIFICATIONS:
 CURRENT RATING: 3 AMPS
 DWV: 600 VAC
 TEMPERATURE RATING: -55°C TO 125°C
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.

2. MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F
 PIN CONTACTS: GOLD PLATED BERYLLIUM COPPER
 24 AWG LEADS: TIN PLATED COPPER ALLOY

1. MARKING: NONE

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
CRITICAL	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 9-19-18	CHECKED BY & DATE SEE ECN	TITLE: STRIP CONNECTOR, MALE, 4 POS., SR04P3-L04	
SPL/MINOR	ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT	APPROVED BY & DATE SEE ECN	MATERIAL: 2		Uti-Mate Connector Inc.
SPL/MAJOR		CAD FILENAME SD-837041223.DGN	PART NO. 837041223	DRAWING NO. SD-837041223	SHEET NO. 1 OF 1
KEY	Uti-Mate CAGE CODE 58967	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			PART REV -