


| PART REV | DWG ISSUE | DATE    | ECN NO.  | APPVD BY | REL BY |
|----------|-----------|---------|----------|----------|--------|
| -        | -         | 5-16-13 | UMI 4965 | TP       | DW     |

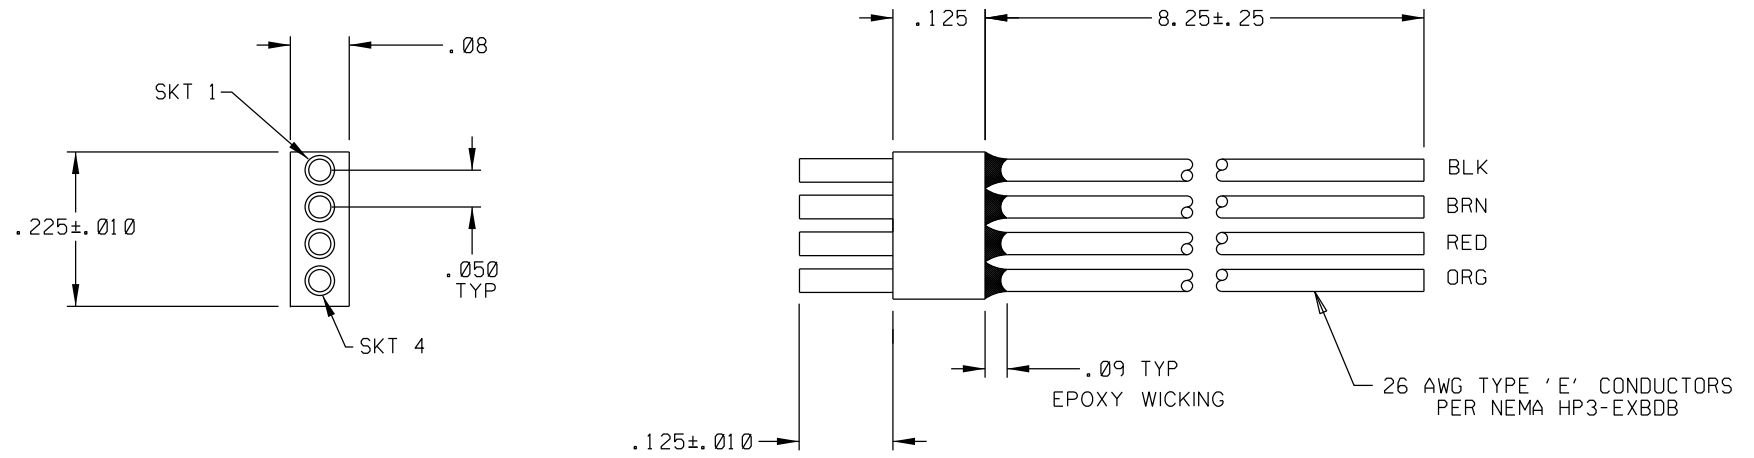

3. PERFORMANCE SPECIFICATIONS:  
 CONTACT CURRENT RATING: 3 AMPS MAX.  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.  
 DWV: 600 VAC;  
 TEMPERATURE RATING: 125° C  
 CONTACT RESISTANCE: 8 MILLIOHMS MAX AT 2.5 AMPS

2 MATERIALS:  
 BODY/INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK  
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488  
 26 AWG CONDUCTORS: PTFE INSULATED 26 AWG (7X34) WIRE PER NEMA HP3-EXBDB

1. MARKING: NONE  
 NOTES: UNLESS OTHERWISE SPECIFIED

|  |   |                               |  |                        |                              |
|--|---|-------------------------------|--|------------------------|------------------------------|
| QUALITY SYMBOLS<br>MAJOR<br>CRITICAL<br>SPC  | UNLESS SPECIFIED:<br>ALL DIMENSIONS IN INCHES   | SCALE<br>NONE                 | DWG SIZE<br>B                                | THIRD ANGLE PROJECTION | REVISE ON CAD ONLY           |
|  | GENERAL TOLERANCES:<br>3 PLACE $\pm .005$<br>2 PLACE $\pm .01$<br>ANGULAR $\pm 2^\circ$ | DRAWN BY & DATE<br>DW 2-15-10 | TITLE:<br>STRIP CONNECTOR<br>SR04S0-26E5-8.0 |                        |                              |
|  | Utii-Mate CAGE CODE<br><b>58967</b>   | CHECKED BY & DATE<br>SEE ECN  | MATERIAL:<br>2                               |                        | Utii-Mate Connector Inc.     |
|  |   | APPROVED BY & DATE<br>SEE ECN | CAD FILENAME<br>SD-8370421 50.DGN            | PART NO.<br>8370421 50 | DRAWING NO.<br>SD-8370421 50 |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION. |   |                               |  |                        | PART REV<br>-                |