


SD-837042380

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	5-16-13	UMI 4965	TP	DW

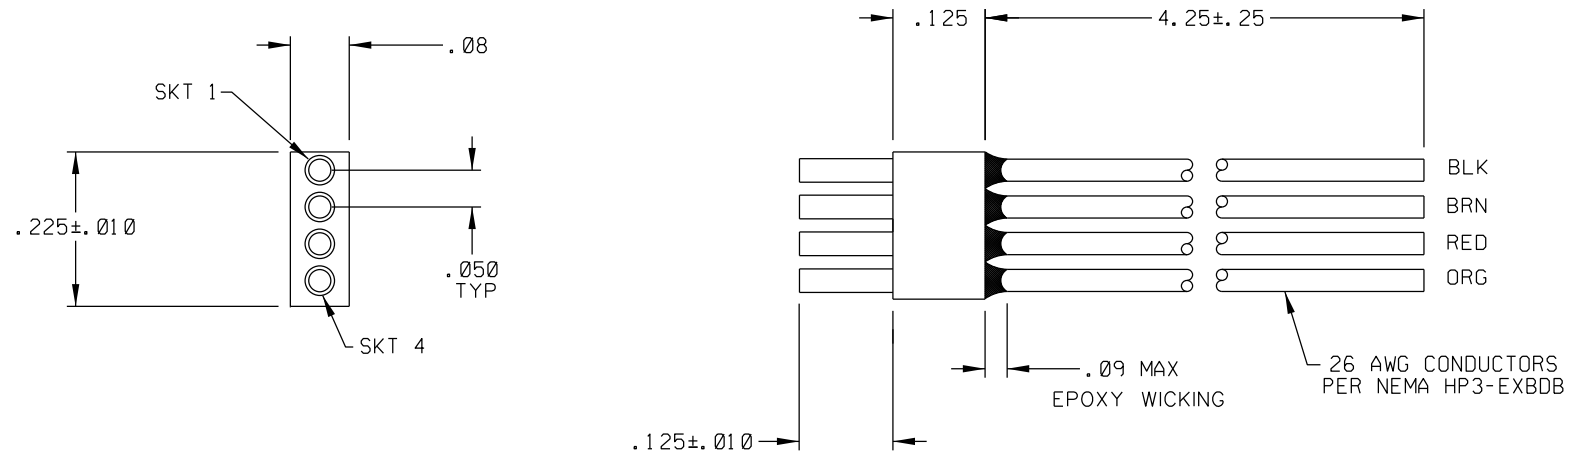

3. PERFORMANCE SPECIFICATIONS:  
 CONTACT CURRENT RATING: 3 AMPS MAX.  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN.  
 DWV: 600 VAC;  
 TEMPERATURE RATING: 125°C  
 CONTACT RESISTANCE: 8 MILLIOHMS MAX AT 2.5 AMPS

2 MATERIALS:  
 BODY/INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK  
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD PLATED PER ASTM B488  
 26 AWG CONDUCTORS: PTFE INSULATED 26 AWG (7X34) WIRE PER NEMA HP3-EXBDB

1. MARKING: NONE  
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS MAJOR  = CRITICAL  = SPC  =	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES  GENERAL TOLERANCES: 3 PLACE $\pm .005$ 2 PLACE $\pm .01$ ANGULAR $\pm 2^\circ$	SCALE: NONE DWG SIZE: B  DRAWN BY & DATE: DW 2-15-10  CHECKED BY & DATE: SEE ECN  APPROVED BY & DATE: SEE ECN	THIRD ANGLE PROJECTION  TITLE: STRIP CONNECTOR SR04S0-26E5-4.0  MATERIAL: 	REVISE ON CAD ONLY  Uti-Mate Connector Inc.	
	Uti-Mate CAGE CODE <b>58967</b>	CAD FILENAME: SD-837042380.DGN	PART NO.: 837042380	DRAWING NO.: SD-837042380	SHEET NO.: 1 OF 1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				PART REV: -