

10

9

8

7

6

5


4

3

2

SD-837042909

PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	4-18-11	UMI 4356		

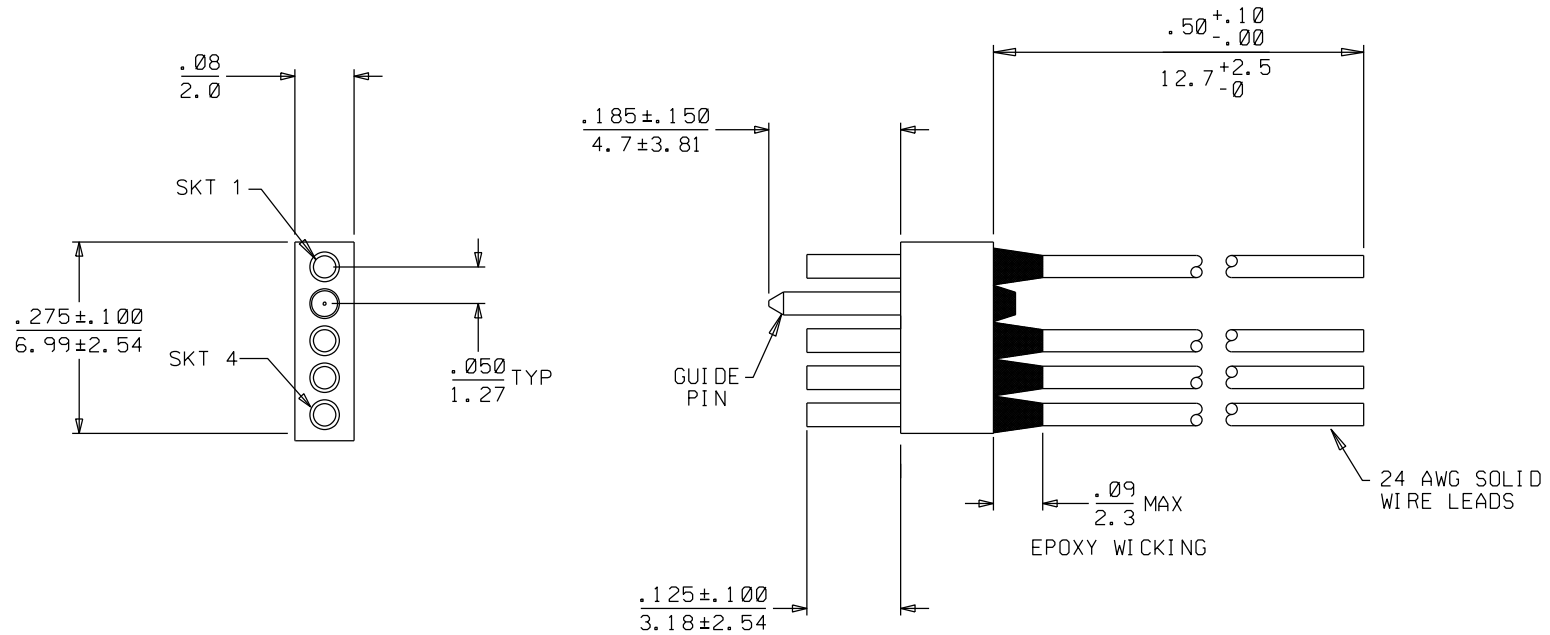

- 2 MATERIALS:
 INSULATOR/BODY: PPS PER MIL-M-24519 GST-40F
 SOCKET CONTACT: CDA 21Ø COPPER, GOLD PLATED PER ASTM B488
 24 AWG LEADS: COPPER ALLOY, GOLD PLATED ASTM B488
 GUIDE PIN: STAINLESS STEEL, PASSIVATED

1. MARKING: NONE

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES/MM	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
MAJOR ▲ =	GENERAL TOLERANCES: 3 PLACE $\pm .005 / .13$ 2 PLACE $\pm .01 / .25$ ANGULAR $\pm 2^\circ$	DRAWN BY & DATE DW 4-18-11		TITLE: STRIP CONNECTOR SR04S1-24C4-0.5 SPL	
CRITICAL ▼ =	Ulti-Mate CAGE CODE 58967	CHECKED BY & DATE		MATERIAL: 2	
SPC △ =		APPROVED BY & DATE		Ulti-Mate Connector Inc.	
		CAD FILENAME SD-837042909.DGN	PART NO. 837042909	DRAWING NO. SD-837042909	SHEET NO. 1 OF 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			
				REV -	