


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	11-12-09	UMI 3984		

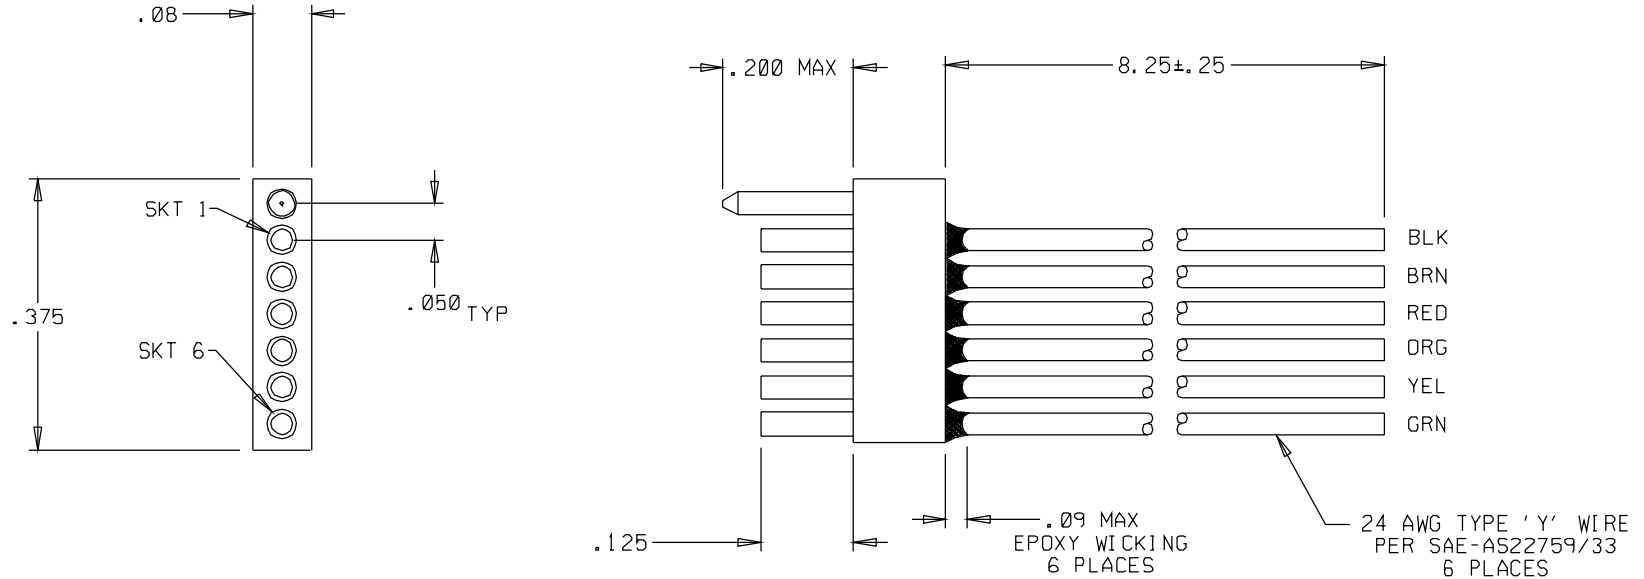

2 MATERIALS:
 INSULATOR/HOUSING: PPS PER MIL-M-24519 GST-40F
 SOCKET CONTACT: COPPER ALLOY CDA 210, 1/2 HARD,
 GOLD PLATED PER ASTM B488
 GUIDE PIN: STAINLESS STEEL, PASSIVATED PER AMS-2700
 1. MARKING: NONE
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS MAJOR - CRITICAL C/ SPC S/	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE NONE	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 11-12-09		TITLE: STRIP CONNECTOR, 6 POSITION FEMALE, W/GUIDE PIN, SR06SI-24Y6-8.0	
	Ulti-Mate CAGE CODE 58967	CHECKED BY & DATE		MATERIAL: 2	
		APPROVED BY & DATE	CAD FILENAME SD-837062906.DGN	PART NO. 837062906	DRAWING NO. SD-837062906
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			REV -