


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	9-25-12	UMI 4729	DW	DW

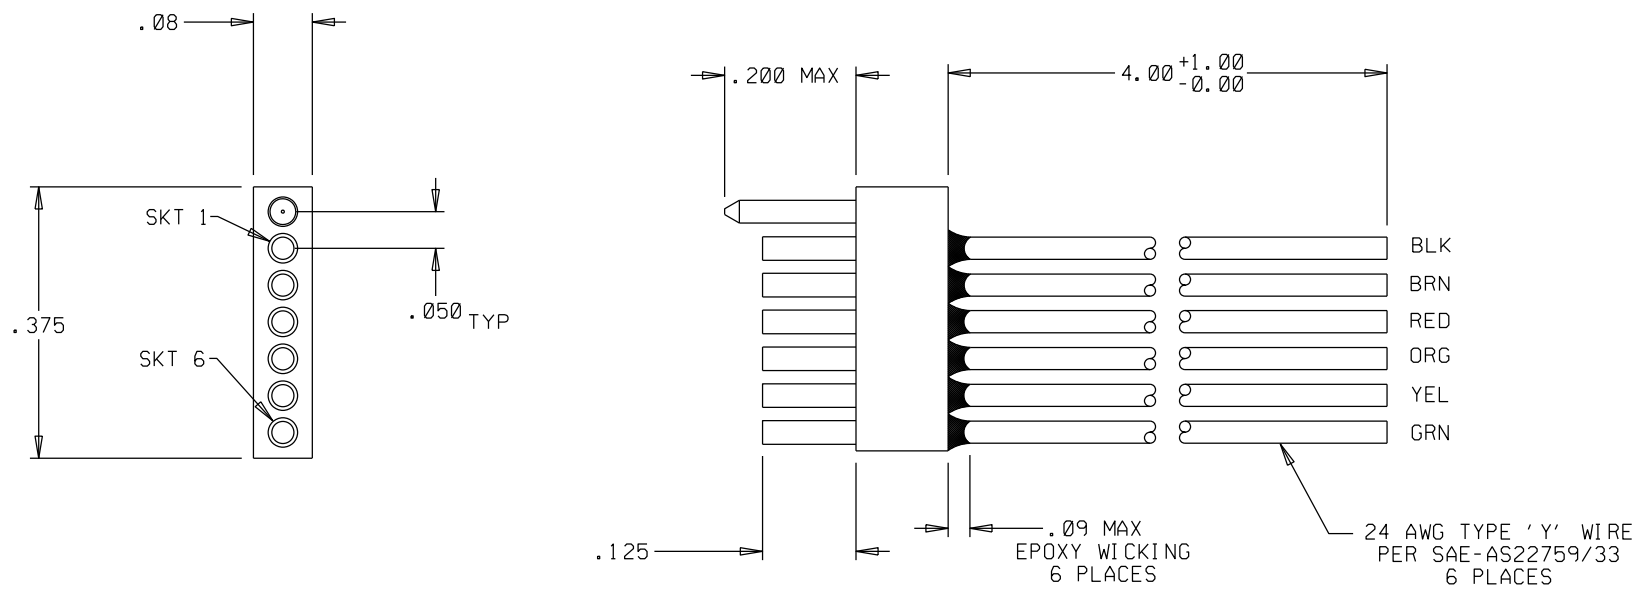

2 MATERIALS:
 INSULATOR/HOUSING: PPS PER MIL-M-24519 GST-40F
 SOCKET CONTACT: C21000 COPPER ALLOY PER ASTM B36, 1/2 HARD,
 GOLD PLATED PER ASTM B488
 GUIDE PIN: STAINLESS STEEL, PASSIVATED PER AMS 2700

1. MARKING: NONE
 NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS CRITICAL SPECIAL KEY S K	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2° ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE TO THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	SCALE NONE DWG SIZE B DRAWN BY & DATE DW 11-12-09 CHECKED BY & DATE SEE ECN APPROVED BY & DATE SEE ECN CAD FILENAME SD-837062907.DGN	THIRD ANGLE PROJECTION REVISE ON CAD ONLY TITLE: STRIP CONNECTOR, 6 POSITION FEMALE, W/GUIDE PIN, SR06SI-24Y6-4.0 MATERIAL: 2 Ulti-Mate Connector Inc.	PART NO. 837062907 DRAWING NO. SD-837062907 SHEET NO. 1 OF 1 PART REV -
---	---	---	---	--