


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	2-26-13	UMI 4894		

- 1 ——— BLK
- 2 ——— BRN
- 3 ——— RED
- 4 ——— ORG
- 5 ——— YEL
- 6 ——— GRN
- 7 ——— BLU

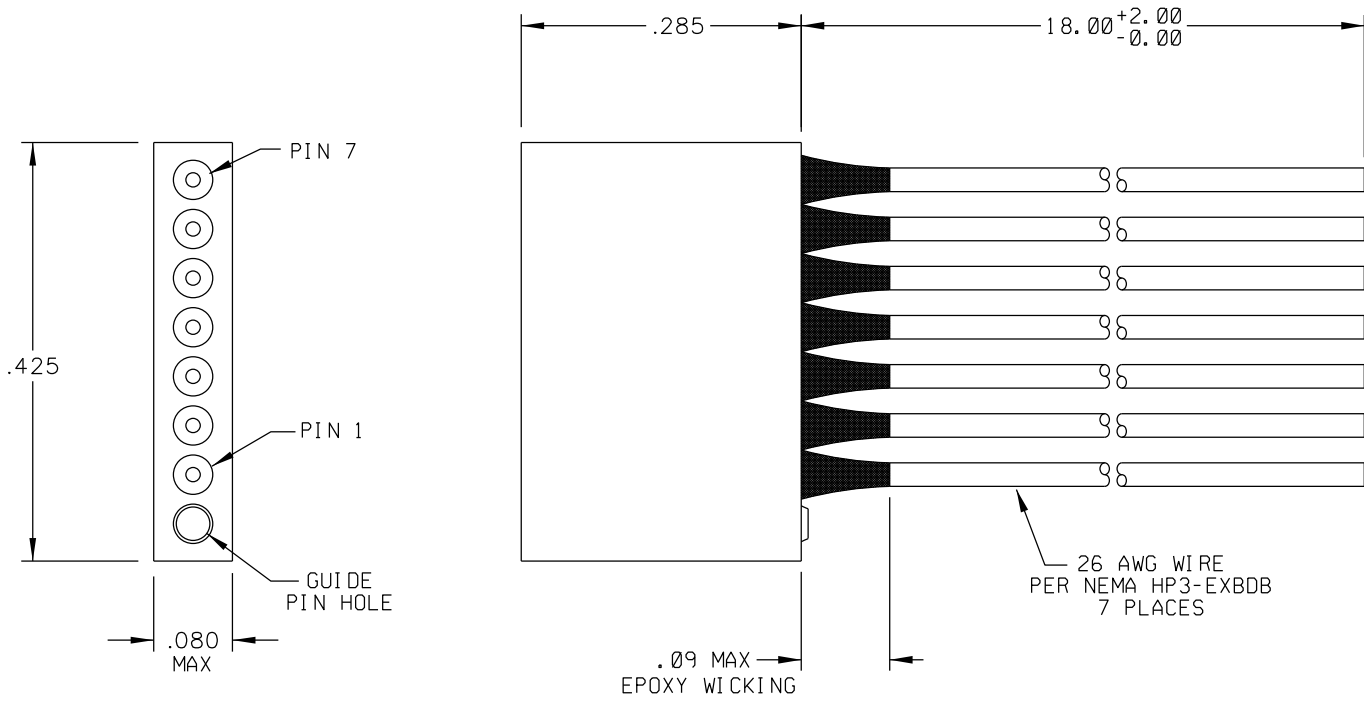

2 MATERIALS:
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194,
 GOLD PLATED PER ASTM B488

1. MARKING: UMI DATE CODE, UMI PART NUMBER, AND "UMI" (AS SPACE PERMITS)

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS MAJOR CRITICAL SPC	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE 8:1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	GENERAL TOLERANCES: 3 PLACE ± .005 2 PLACE ± .01 ANGULAR ± 2°	DRAWN BY & DATE DW 2-26-13	TITLE: STRIP CONNECTOR, MALE, SIZE 7, 26 AWG LEADS, G/P HOLE, SR07P1-26E5-18.0		MATERIAL:
	Uti-Mate CAGE CODE 58967	CHECKED BY & DATE	APPROVED BY & DATE		
		CAD FILENAME SD-837071 041.DGN	PART NO. 837071 041	DRAWING NO. SD-837071 041	SHEET NO. 1 OF 1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.				PART REV -