
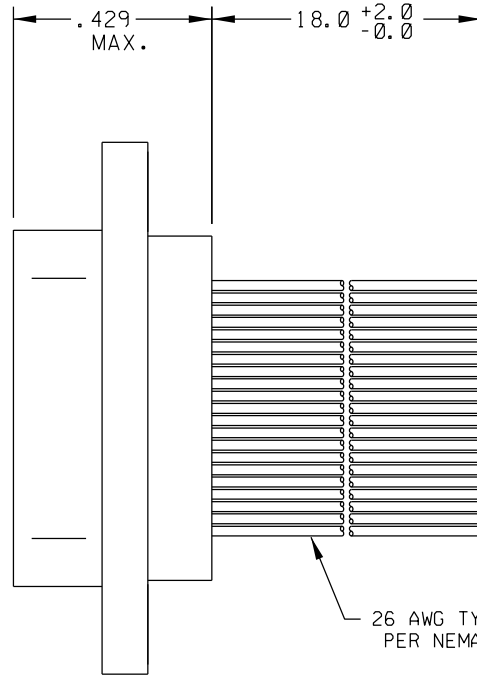


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	12-21-11	UMI 4532		

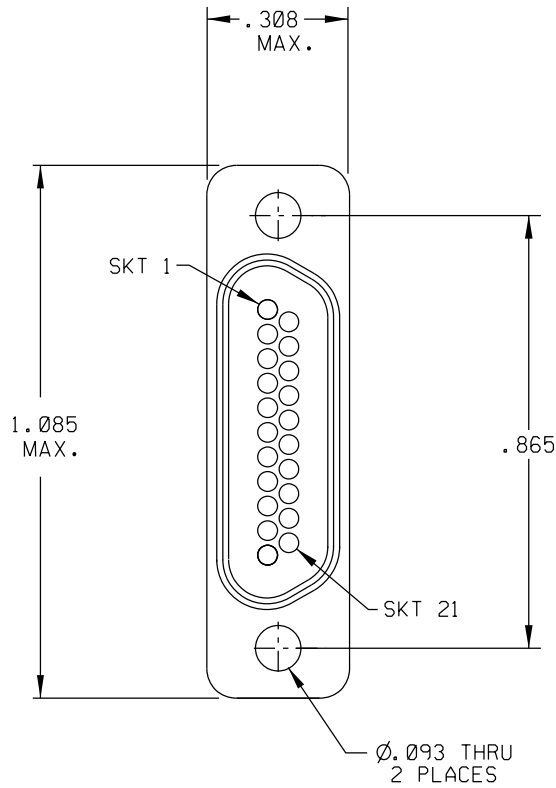

- 1 — BLK
- 2 — BRN
- 3 — RED
- 4 — ORG
- 5 — YEL
- 6 — GRN
- 7 — BLU
- 8 — VIO
- 9 — GRY
- 10 — WHT
- 11 — W/BLK
- 12 — W/BRN
- 13 — W/RED
- 14 — W/ORG
- 15 — W/YEL
- 16 — W/GRN
- 17 — W/BLU
- 18 — W/VIO
- 19 — W/GRY
- 20 — W/BLK/BRN
- 21 — W/BLK/RED

2 MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER SAE-AMS-QQ-A200/8,
 CAD PLATED PER AMS-QQ-P-416
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACTS: C21000 COPPER ALLOY PER ASTM B36, GOLD
 PLATED PER ASTM B488
 INTERFACIAL SEAL: FLUROSILICONE PER MIL-R-25988

1. MARKING: UMI, DATE CODE, UMI P/N.

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS MAJOR CRITICAL SPC	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE 4 : 1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	GENERAL TOLERANCES: 3 PLACE ± .005 2 PLACE ± .01 ANGULAR ± 2°	DRAWN BY & DATE DW 12-21-11	TITLE: HIGH TEMP MICRO-D RECEPTACLE, SIZE 21, WIRED, MR21 S0-26E5-18.0-HT		
	Uti-Mate CAGE CODE 58967	CHECKED BY & DATE	MATERIAL:		
		APPROVED BY & DATE	CAD FILENAME SD-839040166.DGN	PART NO. 839040166	DRAWING NO. SD-839040166
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			REV -

Uti-Mate Connector Inc.