


PART REV	DWG ISSUE	DATE	ECN NO.	APPVD BY	REL BY
-	-	6-20-12	UMI 4639		

WHITE MARK INDICATES POSITION 1

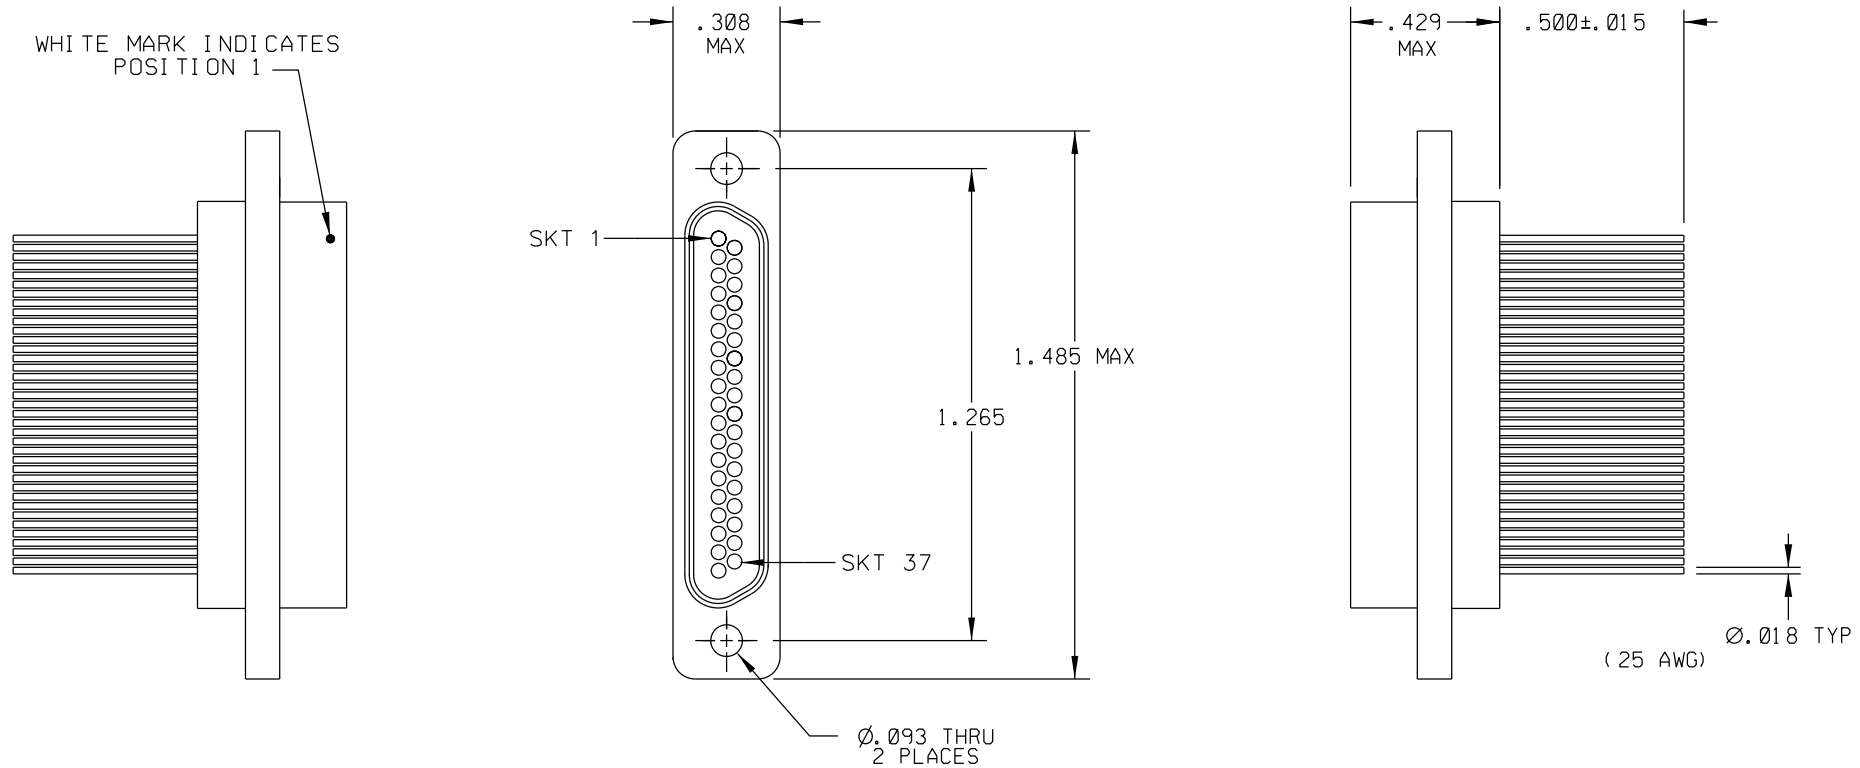

2. MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER QQ-A200/8, CADMIUM PLATED PER AMS-QQ-P-416
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLACK
 SOCKET CONTACTS: C21000 COPPER ALLOY, GOLD PLATED PER AMS 2404
 25 AWG SOLID LEADS: TIN PLATED COPPER ALLOY PER A-A-59551 TYPE S

1. MARKING: UMI, UMIDATE CODE, AND "M83513/04-F07C".

NOTES: UNLESS OTHERWISE SPECIFIED.

QUALITY SYMBOLS MAJOR CRITICAL SPC	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES	SCALE 3 : 1	DWG SIZE B	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
	GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2°	DRAWN BY & DATE DW 6-20-12	TITLE: MICRO-D RECEPTACLE, M83513/04-F07C		
	Uti-Mate CAGE CODE 58967	CHECKED BY & DATE SEE ECN	MATERIAL: SEE NOTE		Uti-Mate Connector Inc.
		APPROVED BY & DATE SEE ECN	CAD FILENAME SD-835260070.DGN	PART NO. 835260070	DRAWING NO. SD-835260070
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			REV -