
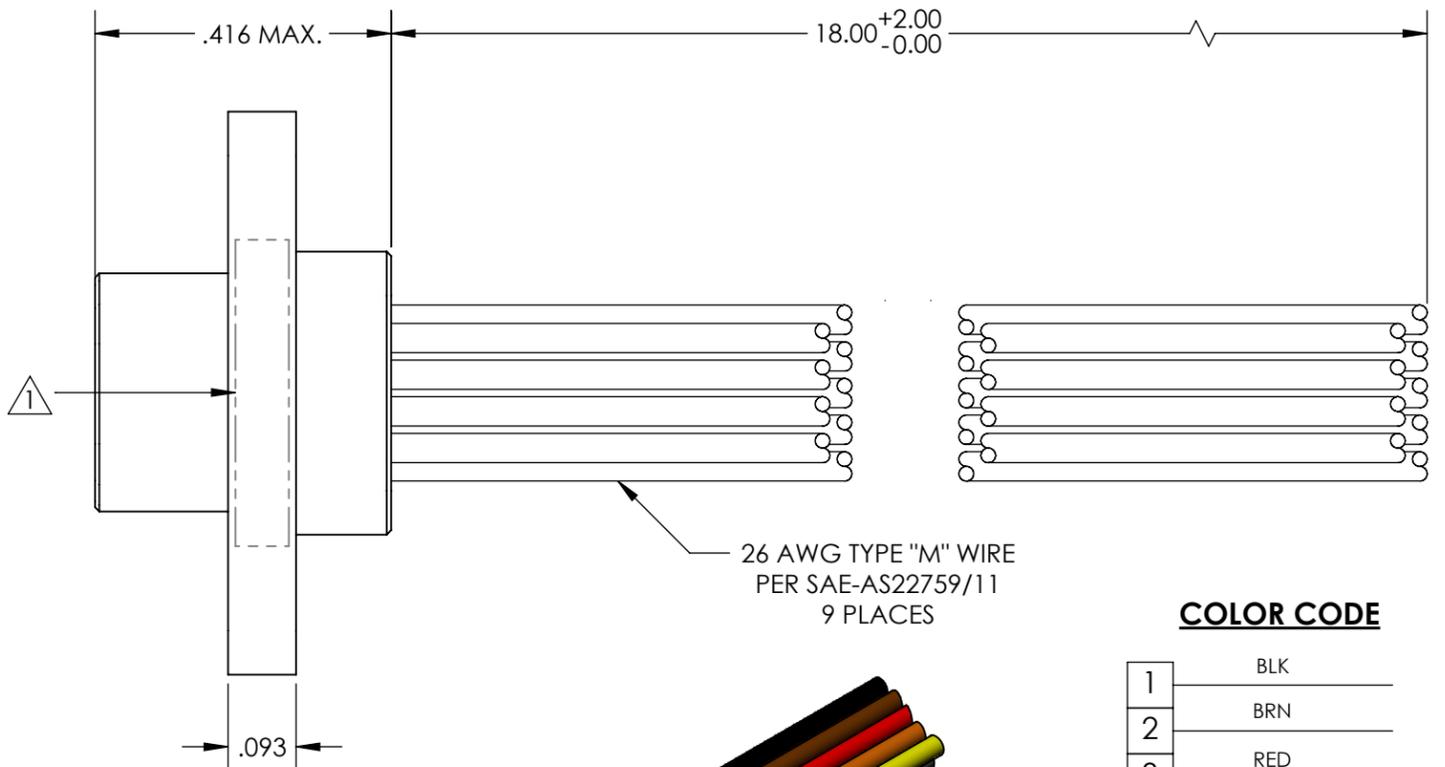



REVISIONS

PART REV.	DWG. ISSUE	DATE	ECN NO.	APPVD. BY	REL. BY
-	-	01/22/2015	UMI5510	DW	DW

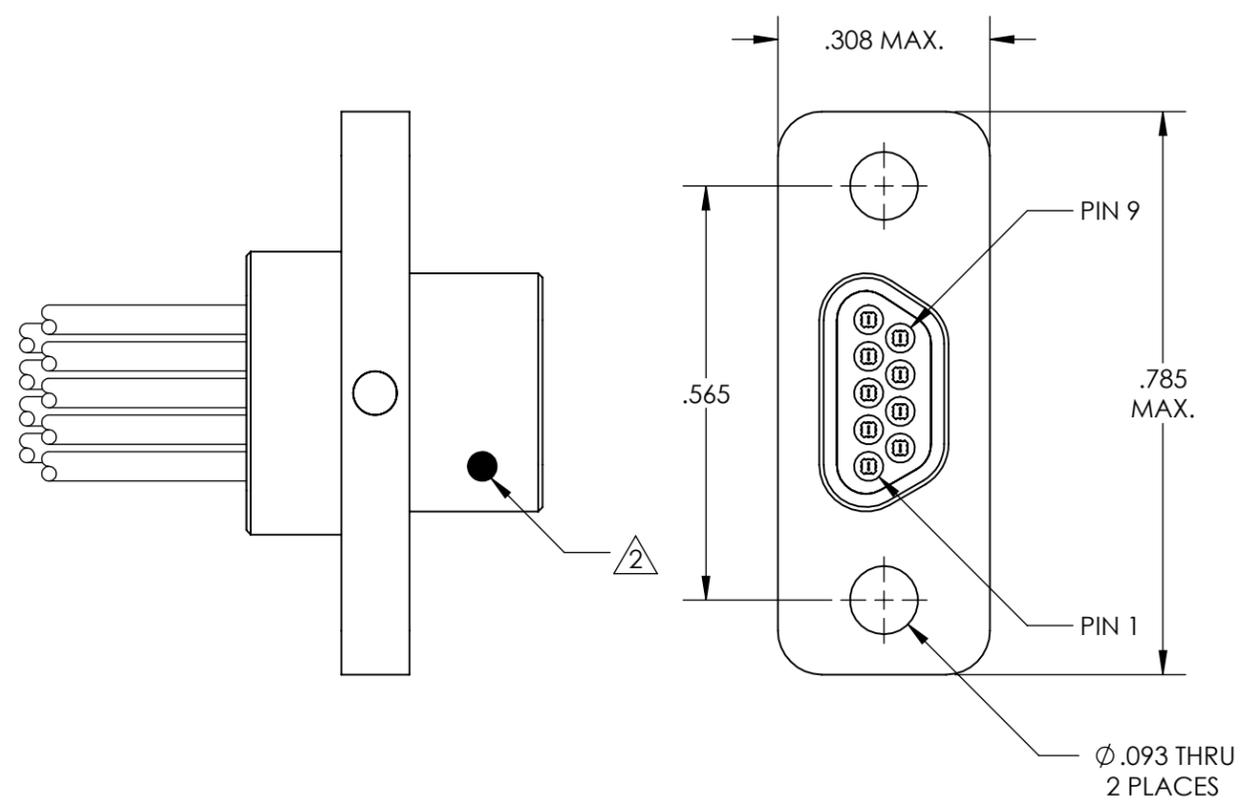

COLOR CODE

1	BLK
2	BRN
3	RED
4	ORG
5	YEL
6	GRN
7	BLU
8	VIO
9	GRY

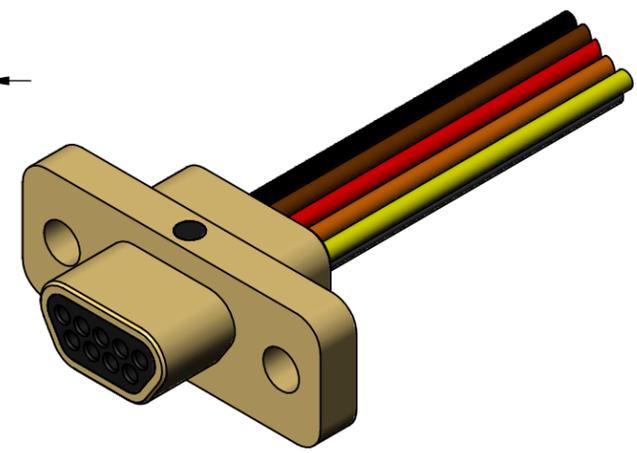

4. PERFORMANCE SPECIFICATIONS: MEETS OR EXCEEDS REQUIREMENTS OF MIL-DTL-83513

3 MATERIALS:
 SHELL: 6061-T6 ALUMINUM PER AMS-QQ-A200/8, CADMIUM PLATED PER AMS-QQ-P-416
 INSULATOR: PPS PER MIL-M-24519 GST-40F, COLOR: BLK
 PIN CONTACTS: C17200 BERYLLIUM COPPER PER ASTM B194, GOLD PLATED PER ASTM B488

2 MARK POSITION 1 WITH A DOT AT LOCATION SHOWN

1 MARKINGS: 'M83513/03-A03C', UMI, AND UMI DATE CODE

NOTES: UNLESS OTHERWISE SPECIFIED

QUALITY SYMBOLS CRITICAL MAJOR NO SYMBOL = MINOR DIMENSION	UNLESS SPECIFIED: ALL DIMENSIONS IN INCHES GENERAL TOLERANCES: 3 PLACE ±.005 2 PLACE ±.01 ANGULAR ±2° ALL EXTERNAL SPECIFICATIONS REFERENCED ON THIS DRAWING SHALL BE THE LATEST REVISION IN EFFECT Ulti-Mate CAGE CODE 58967	SCALE 4:1 DWG SIZE B	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
	DRAWN BY & DATE JB 01/22/2015 CHECKED BY & DATE DW 01/26/2015 APPROVED BY & DATE DW 01/26/2015	TITLE MIL-SPEC MICRO-D WIRED CONNECTOR, PLUG (PINS), 9 POSITION M83513/03-A03C		MATERIAL 		ENG PROJECT #
	CAD FILENAME SD-835110030.slddrw	PART NO. 835110030	DRAWING NO. SD-835110030	SHEET NO. 1 OF 1		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ULTI-MATE INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.			PART REV. -		